
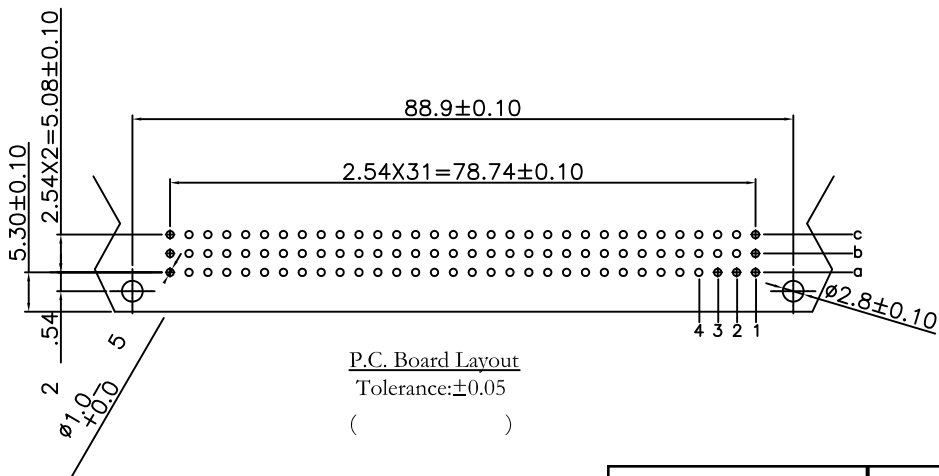
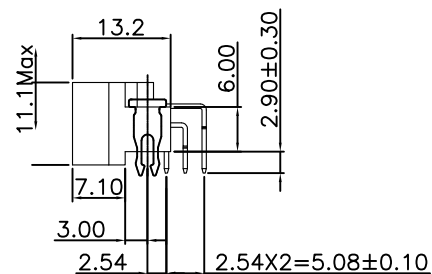
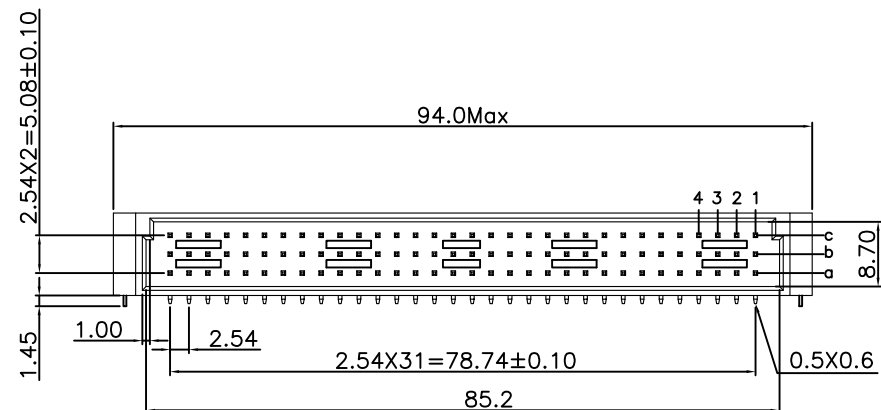


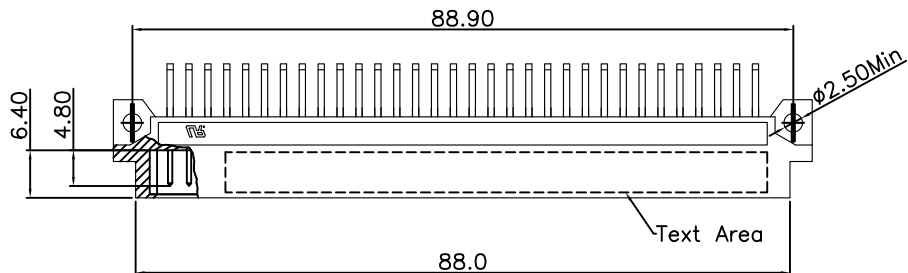

Material and Plating:

Housing: PBT, UL94V-0, Beige.

Contacts: Brass.

Lock: Phosphor Bronze.

Gold Plated on Contact Area and 80u" Min Tin or Gold Flash Plated on solder tail over 50u" Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: $10^6\text{M}\Omega$ min. at DC 500V.

Contact Resistance: $20\text{m}\Omega$ max. at DC 100mA.

Operating Temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$.

***RoHS Compliant**

***Default without lock buckle**

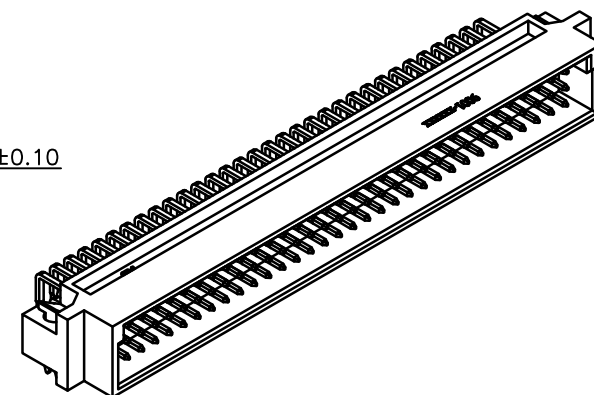

Dwg. No.		11D000033		DIN Signal C 364 90° Type Male 2.54mm	實學hnndo			
Projection					P/N		11116411001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	C	Sheet	1/1					