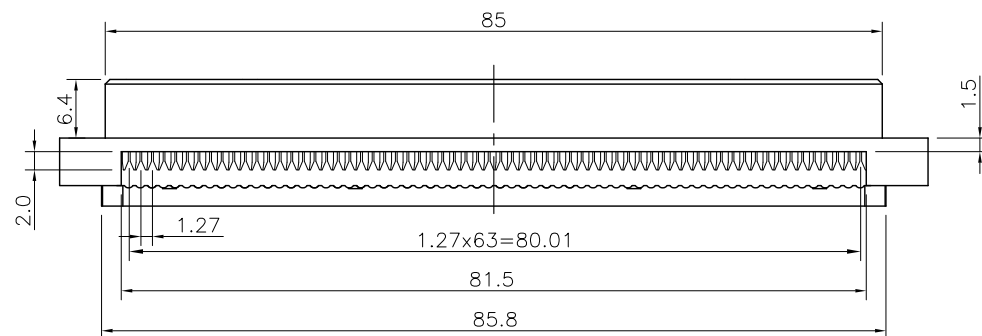
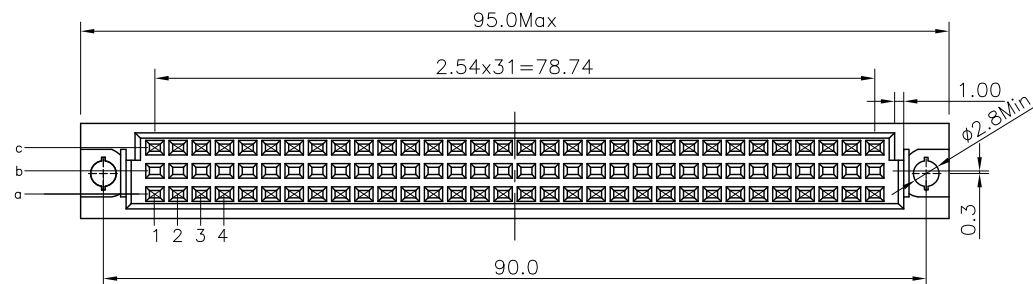


Material and Plating:

Housing: PBT,UL94V-0,Beige.

Contacts: Copper Aolly.

Cover: PBT,UL94V-0,Beige.

Gold Plated on contact Area and Wire Cutting Area over Nickel 50u" Min.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: 1000M min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

***Default without lock buckle**

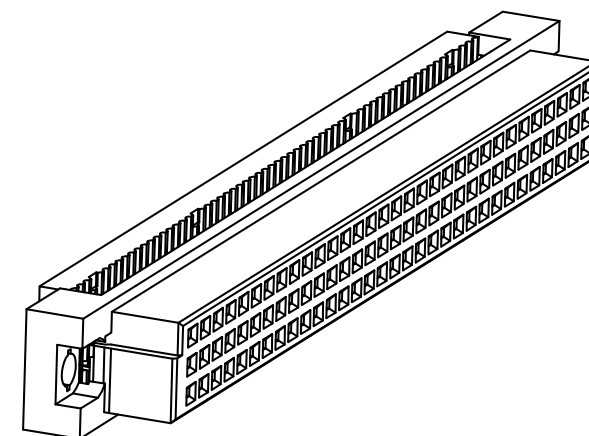

Dwg. No.		11D000049		DIN IDC Rows 364 Type Female 2.54mm	寶亨hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11126418001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0