

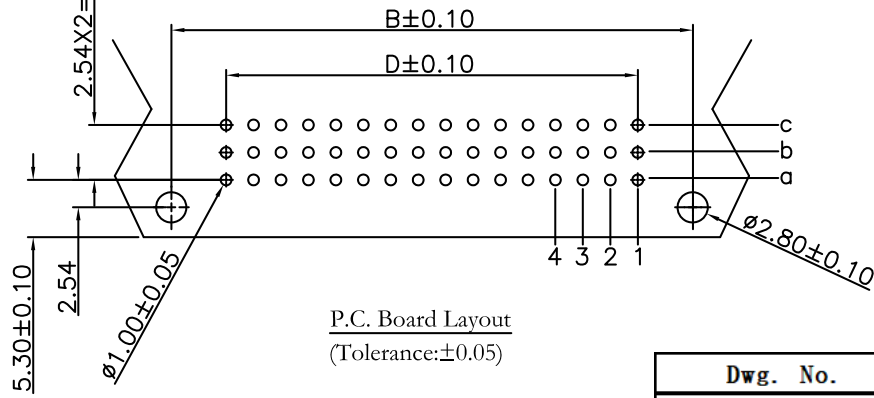
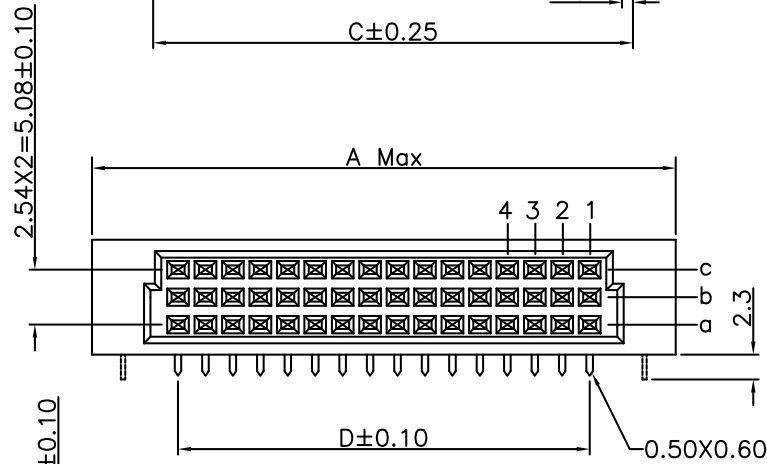


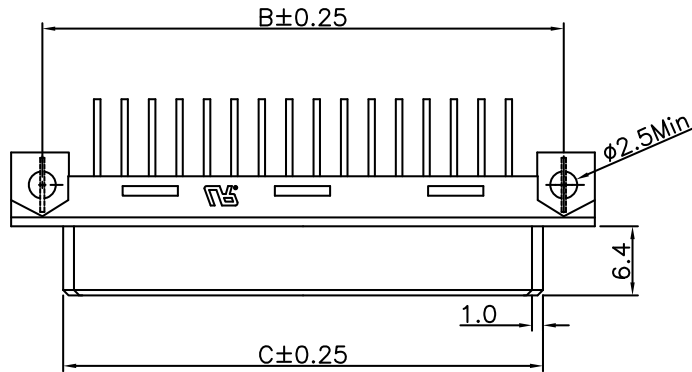

P.C. Board Layout
(Tolerance:±0.05)

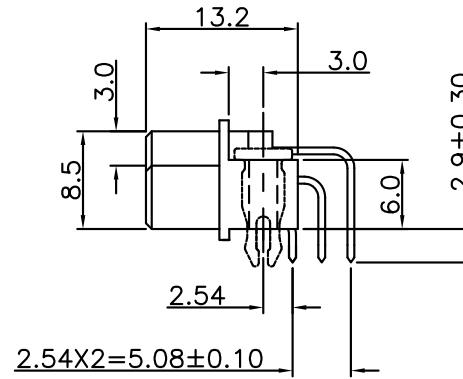

Material and Plating:

Housing: PBT, UL94V-0, Beige

Contacts: Copper Alloy

Lock: Phosphor Bronze

Gold plated on Contact Area and 80u" Min Tin Plated on Solder Tail over Nickel 50u" Min.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: 10^6 MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

***Default without lock buckle**

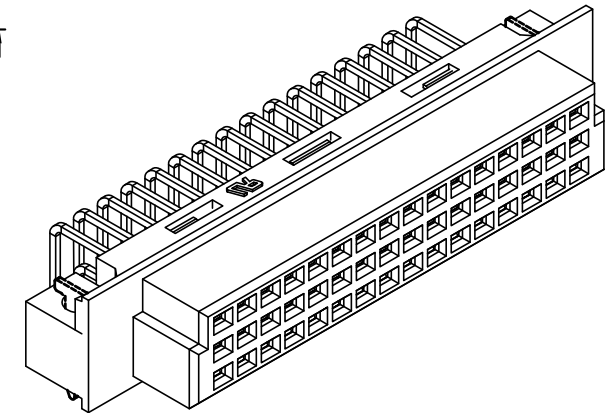

Dwg. No.		11D000012		DIN Signal 3R 330 180° Type Female 2.54mm	實學hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11183011001		
Type	3R	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0