

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6AMP.

Dielectric Withstanding Voltage: AC1550V For 1 minute.





Insulator Resistance: 1000M Ω min. at DC 500V.


Contact Resistance: 15m Ω max. at DC 100mA.

Operating Temperature: -55°C ~ +125°C.

***RoHS Compliant**

***Default without lock buckle**

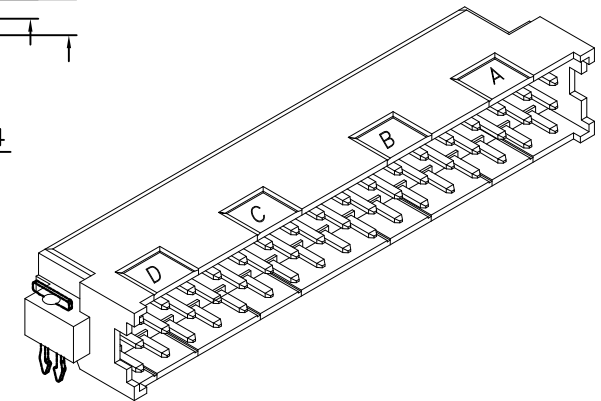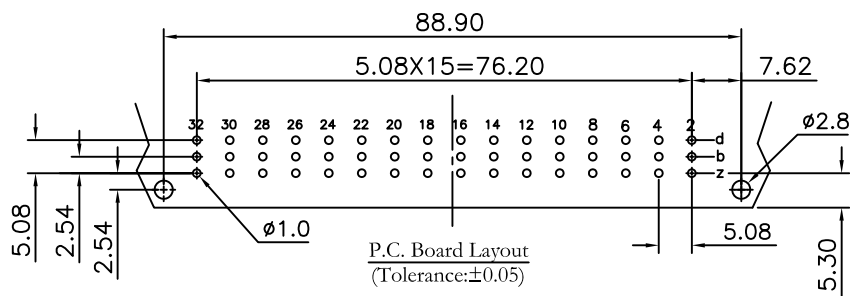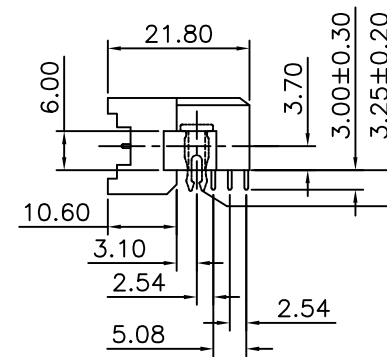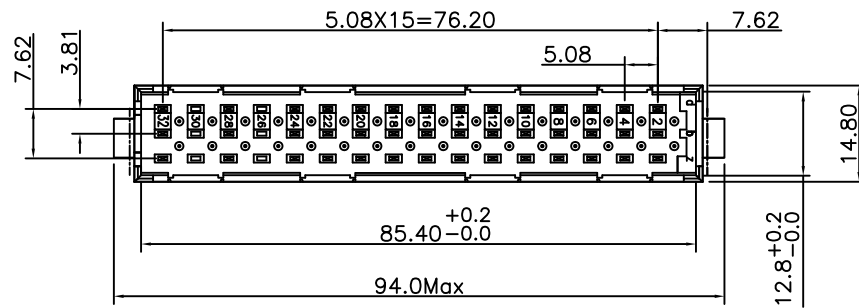

Dwg. No.		11D000050		DIN Power F 332 90° Type Male 5.08mm	寰宇hnndo			
Projection					P/N		11613211001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	F	Sheet	1/1					