
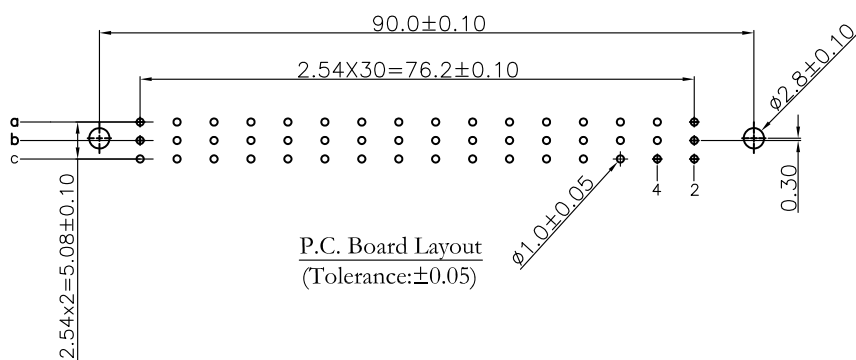
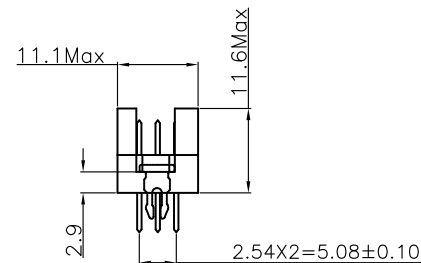
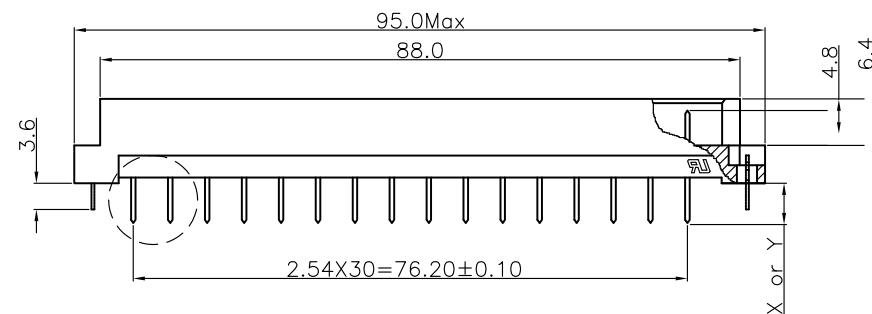


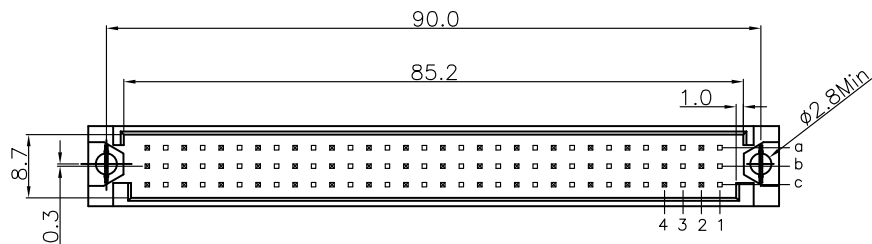

Material and Plating:

Housing: PBT, UL94V-0, Beige

Contacts: Brass

Lock: Phosphor Bronze

Gold Plated on Contact Area and 80u" Min Tin or Gold Flash
Plated on Solder Tail or Press Fit over Nickel 50u" Min .

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: $10^6 \text{ M}\Omega$ min. at DC 500V.


Contact Resistance: $20 \text{ m}\Omega$ max. at DC 100mA.

Operating Temperature: $-55^\circ\text{C} \sim +125^\circ\text{C}$.

***RoHS Compliant**

***Default without lock buckle**

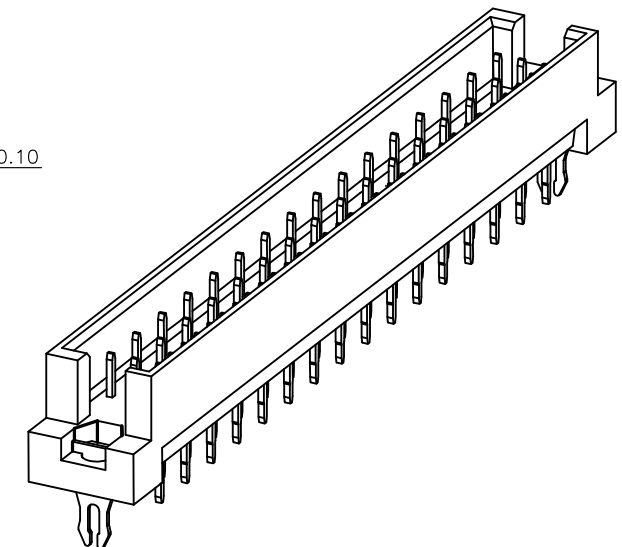

Dwg. No.		11D000060		DIN Signal R 360 180° Type Male 5.08mm	寰宇hnn do			
Projection					P/N		11236011001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	R	Sheet	1/1					