
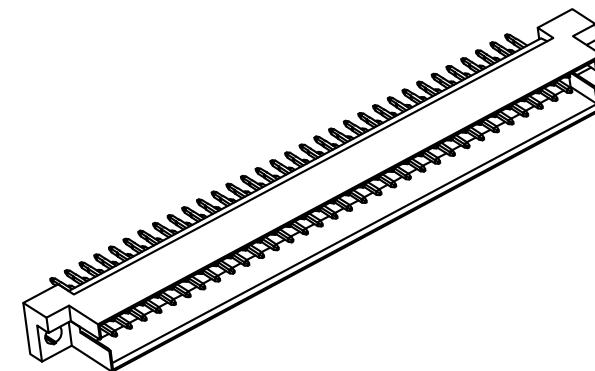


P.C. Board Layout
(Tolerance:±0.05)

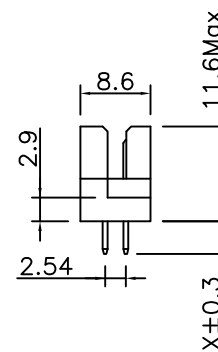

Material and Plating:

Housing: PBT, UL94V-0, Beige

Contacts: Brass

Gold Plated on Contact Area and 80u" Min Tin or Gold
Flash Plated on Solder Tail over 50u" Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

***Default without lock buckle**

Dwg. No.		11D000027		DIN Signal Q 264 180° Type Male 2.54mm	震學hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11336411001		
Type	Q	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0