


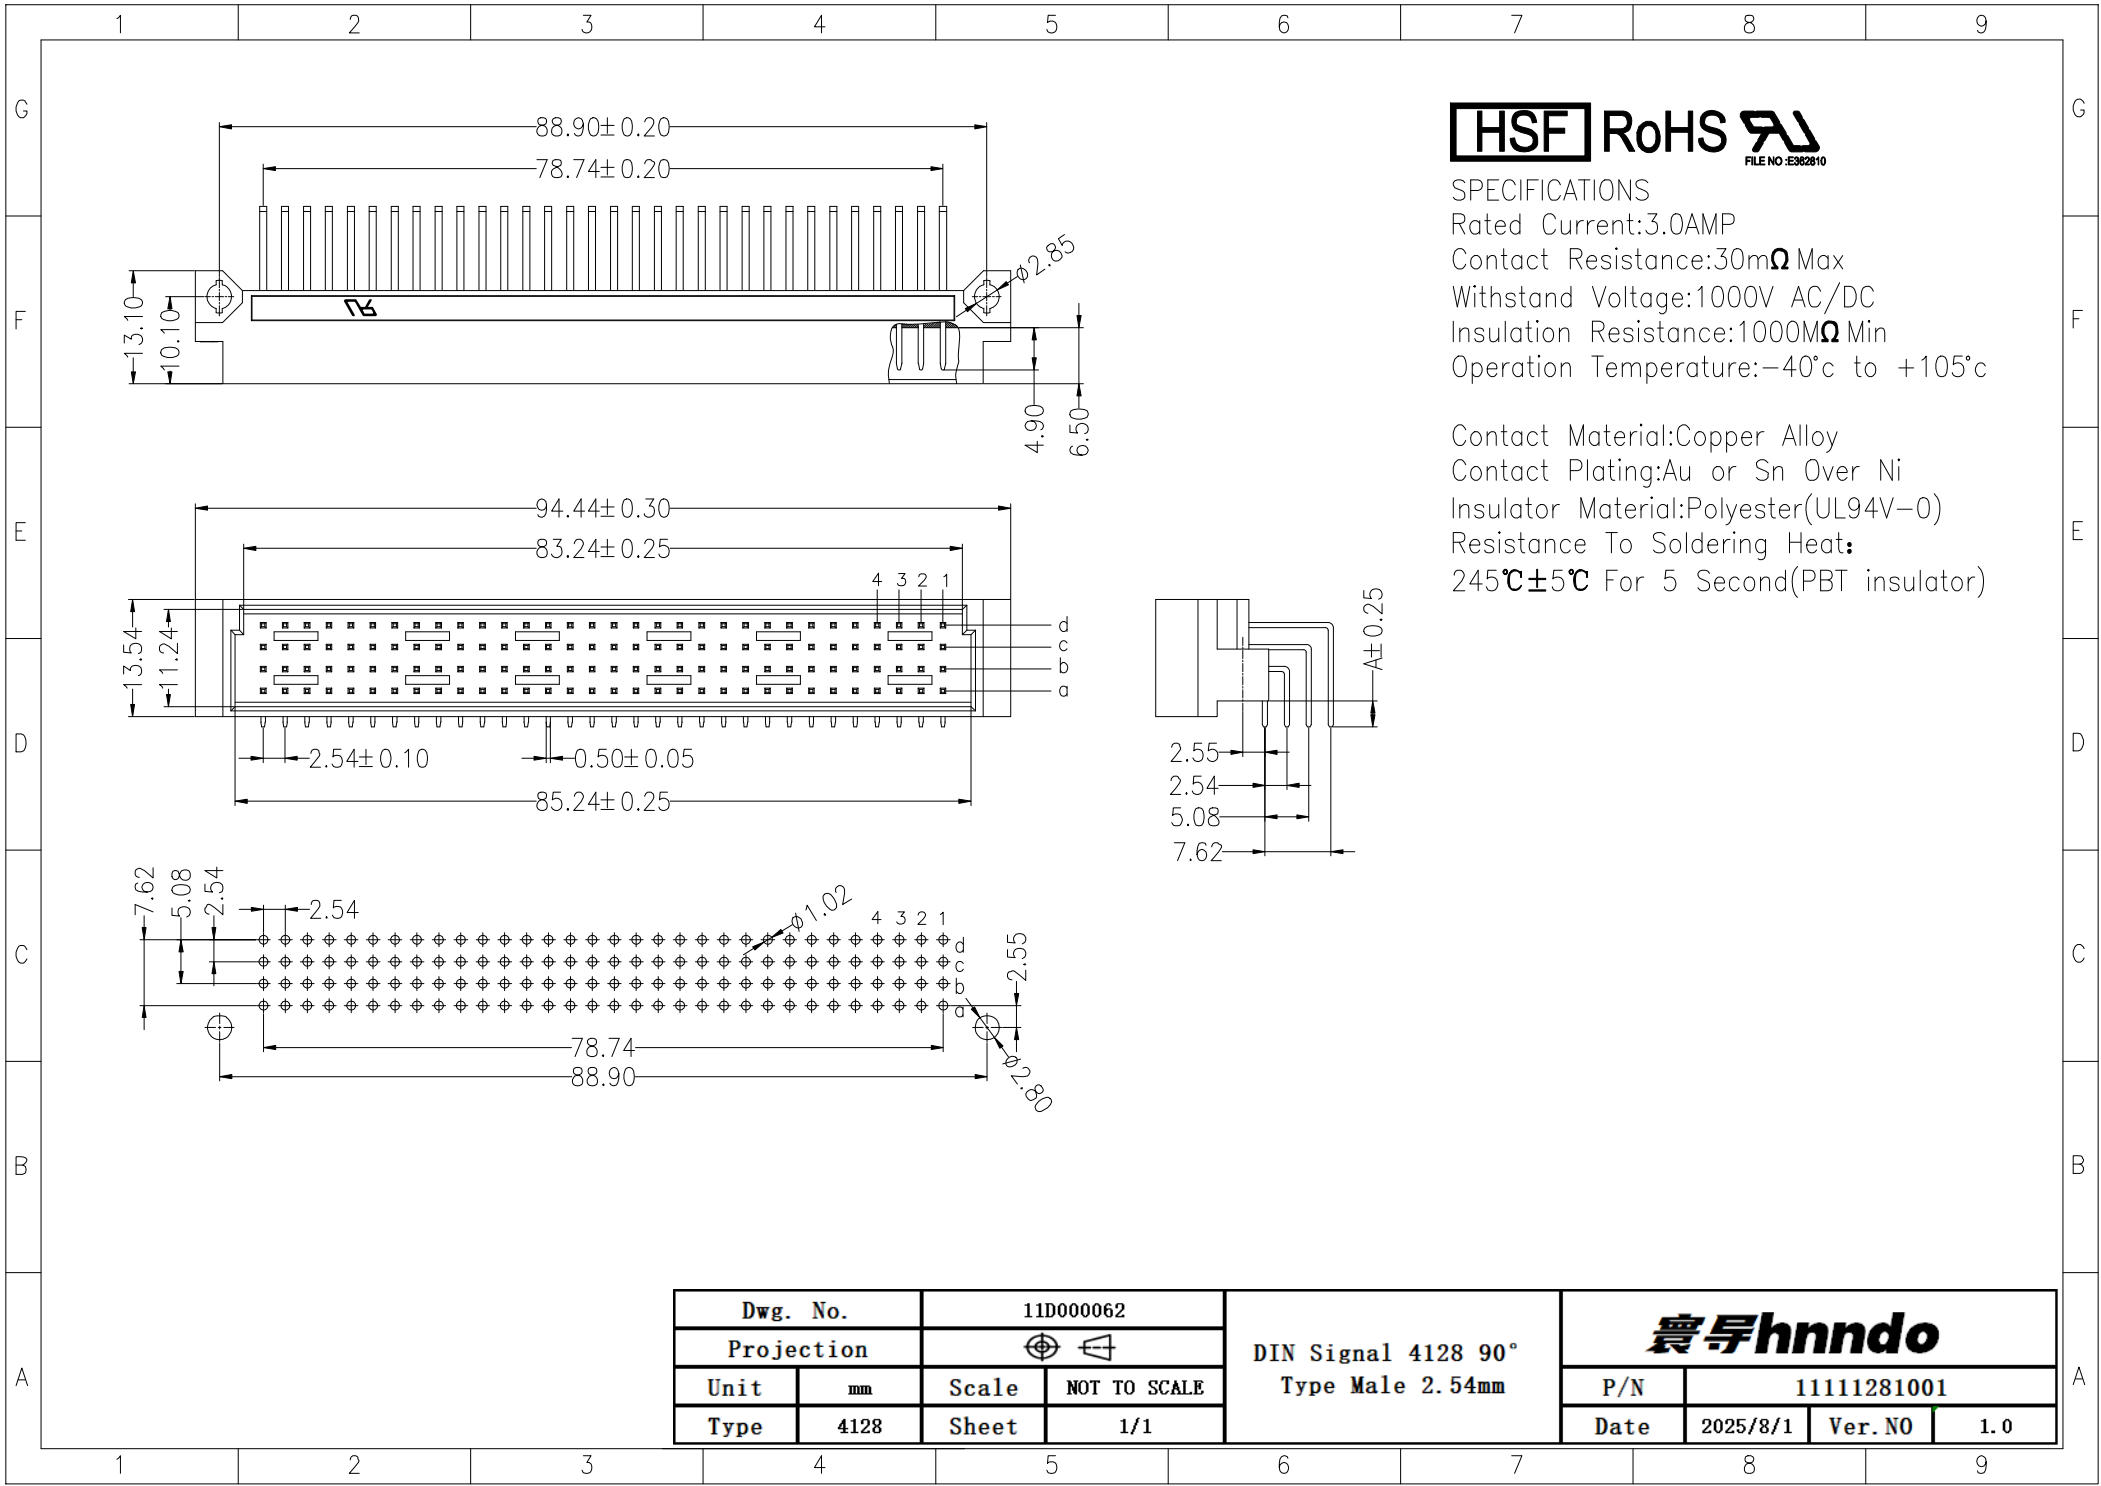

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Copper Alloy
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
245℃±5℃ For 5 Second(PBT insulator)

Dwg. No.		11D000062		DIN Signal 4128 90° Type Male 2.54mm	廣學hnndo			
Projection					P/N		11111281001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	4128	Sheet	1/1					