

Material:

Housing: PBT, UL94V-0, Beige.

Contacts: Brass.

Gold Plated on Contact Area and 80u" Min Tin or Gold Flash
Plated on Solder Tail over Nickel 50u" Min.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V for 1minute.




Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100m A.


Operating Temperature: -55°C ~ +125°C.


* **RoHS Compliant**

* **Default without lock buckle**

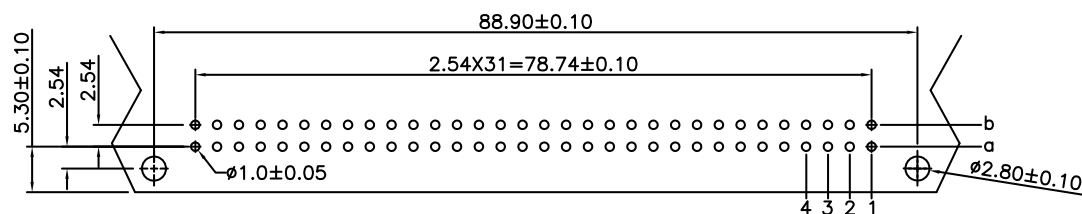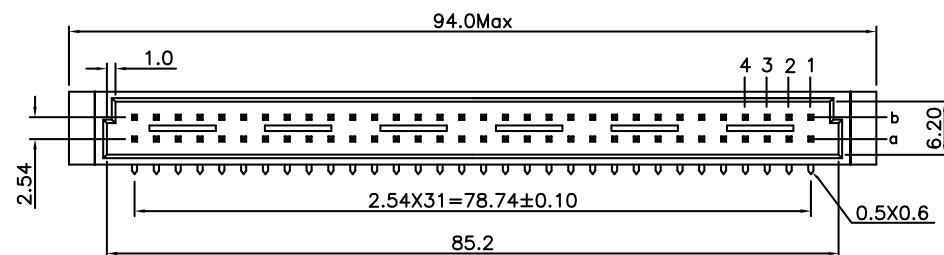

P.C. Board Layout

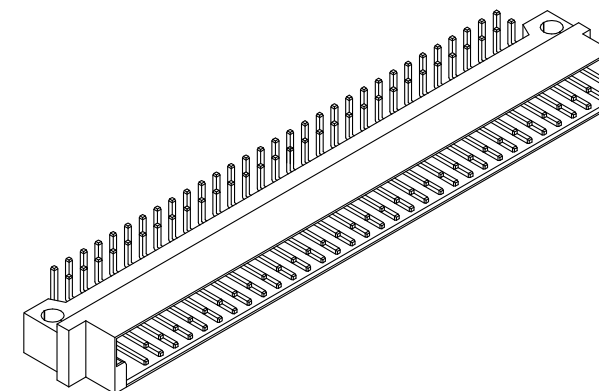

Dwg. No.		11D000025		DIN Signal B 264 90° Type Male 2.54mm				
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N		11316411001	
Type	B	Sheet	1/1		Date		2025/8/1	Ver. NO 1.0