

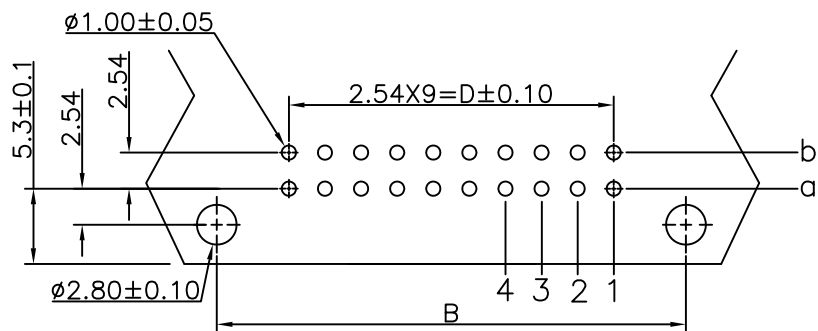
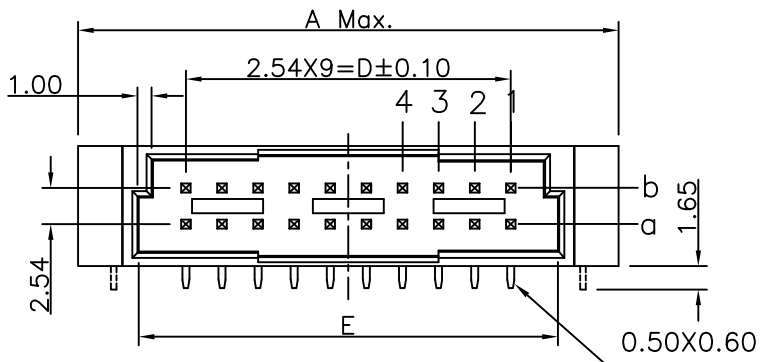
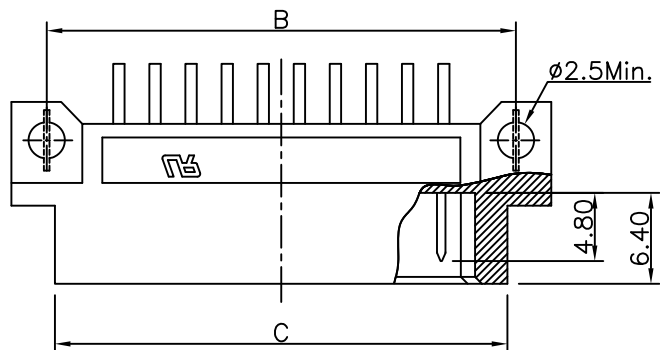


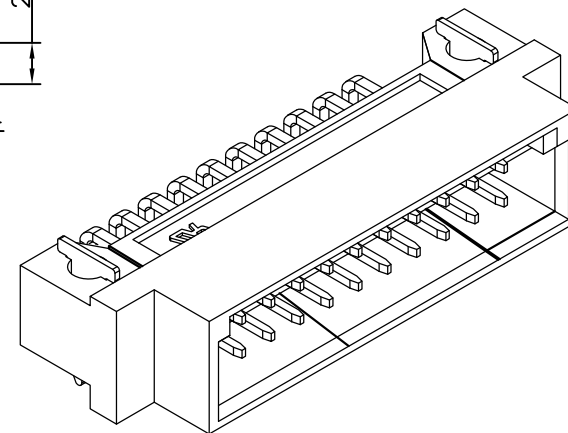

P.C. Board Layout
(Tolerance: $\pm 0.05\text{mm}$)

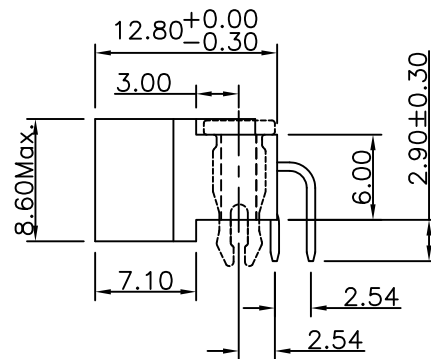

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 20m Ω max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

***Default without lock buckle**

Dwg. No.		11D000001		DIN Signal 3B 220 180° Type Male 2.54mm	實學hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11352011001		
Type	3B	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0