


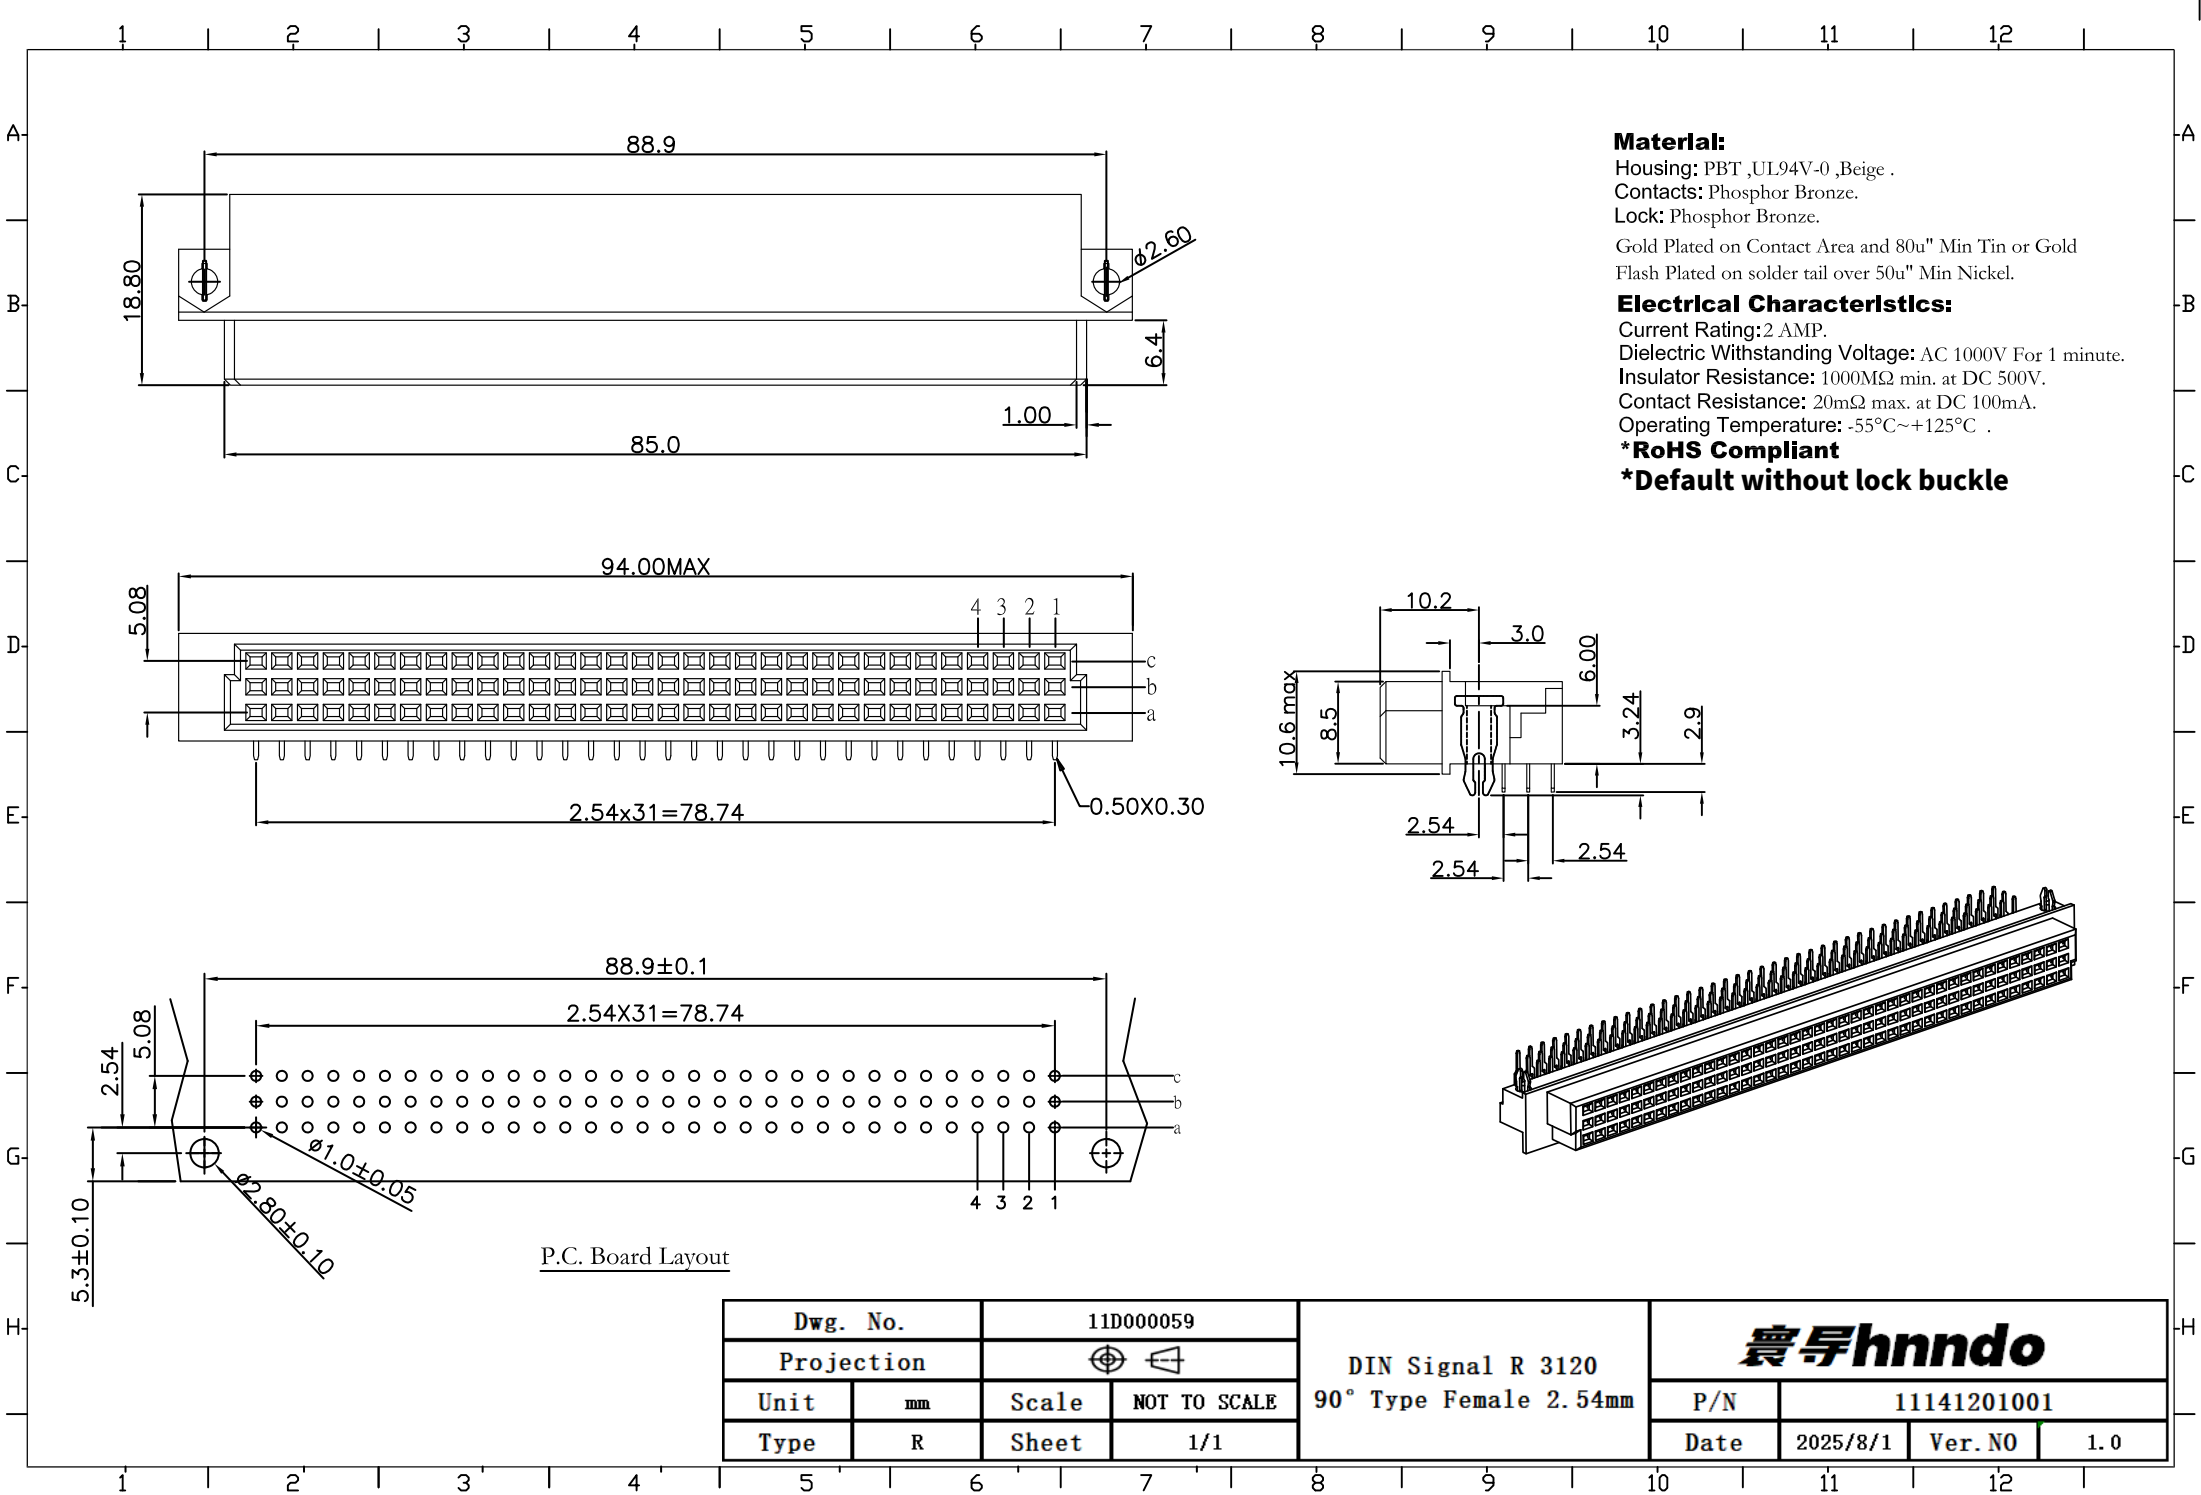

Material:
Housing: PBT ,UL94V-0 ,Beige .
Contacts: Phosphor Bronze.
Lock: Phosphor Bronze.
Gold Plated on Contact Area and 80u" Min Tin or Gold
Flash Plated on solder tail over 50u" Min Nickel.

Electrical Characteristics:
Current Rating:2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C .

***RoHS Compliant**
***Default without lock buckle**

Dwg. No.		11D000059		DIN Signal R 3120 90° Type Female 2.54mm	震學hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11141201001		
Type	R	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0