


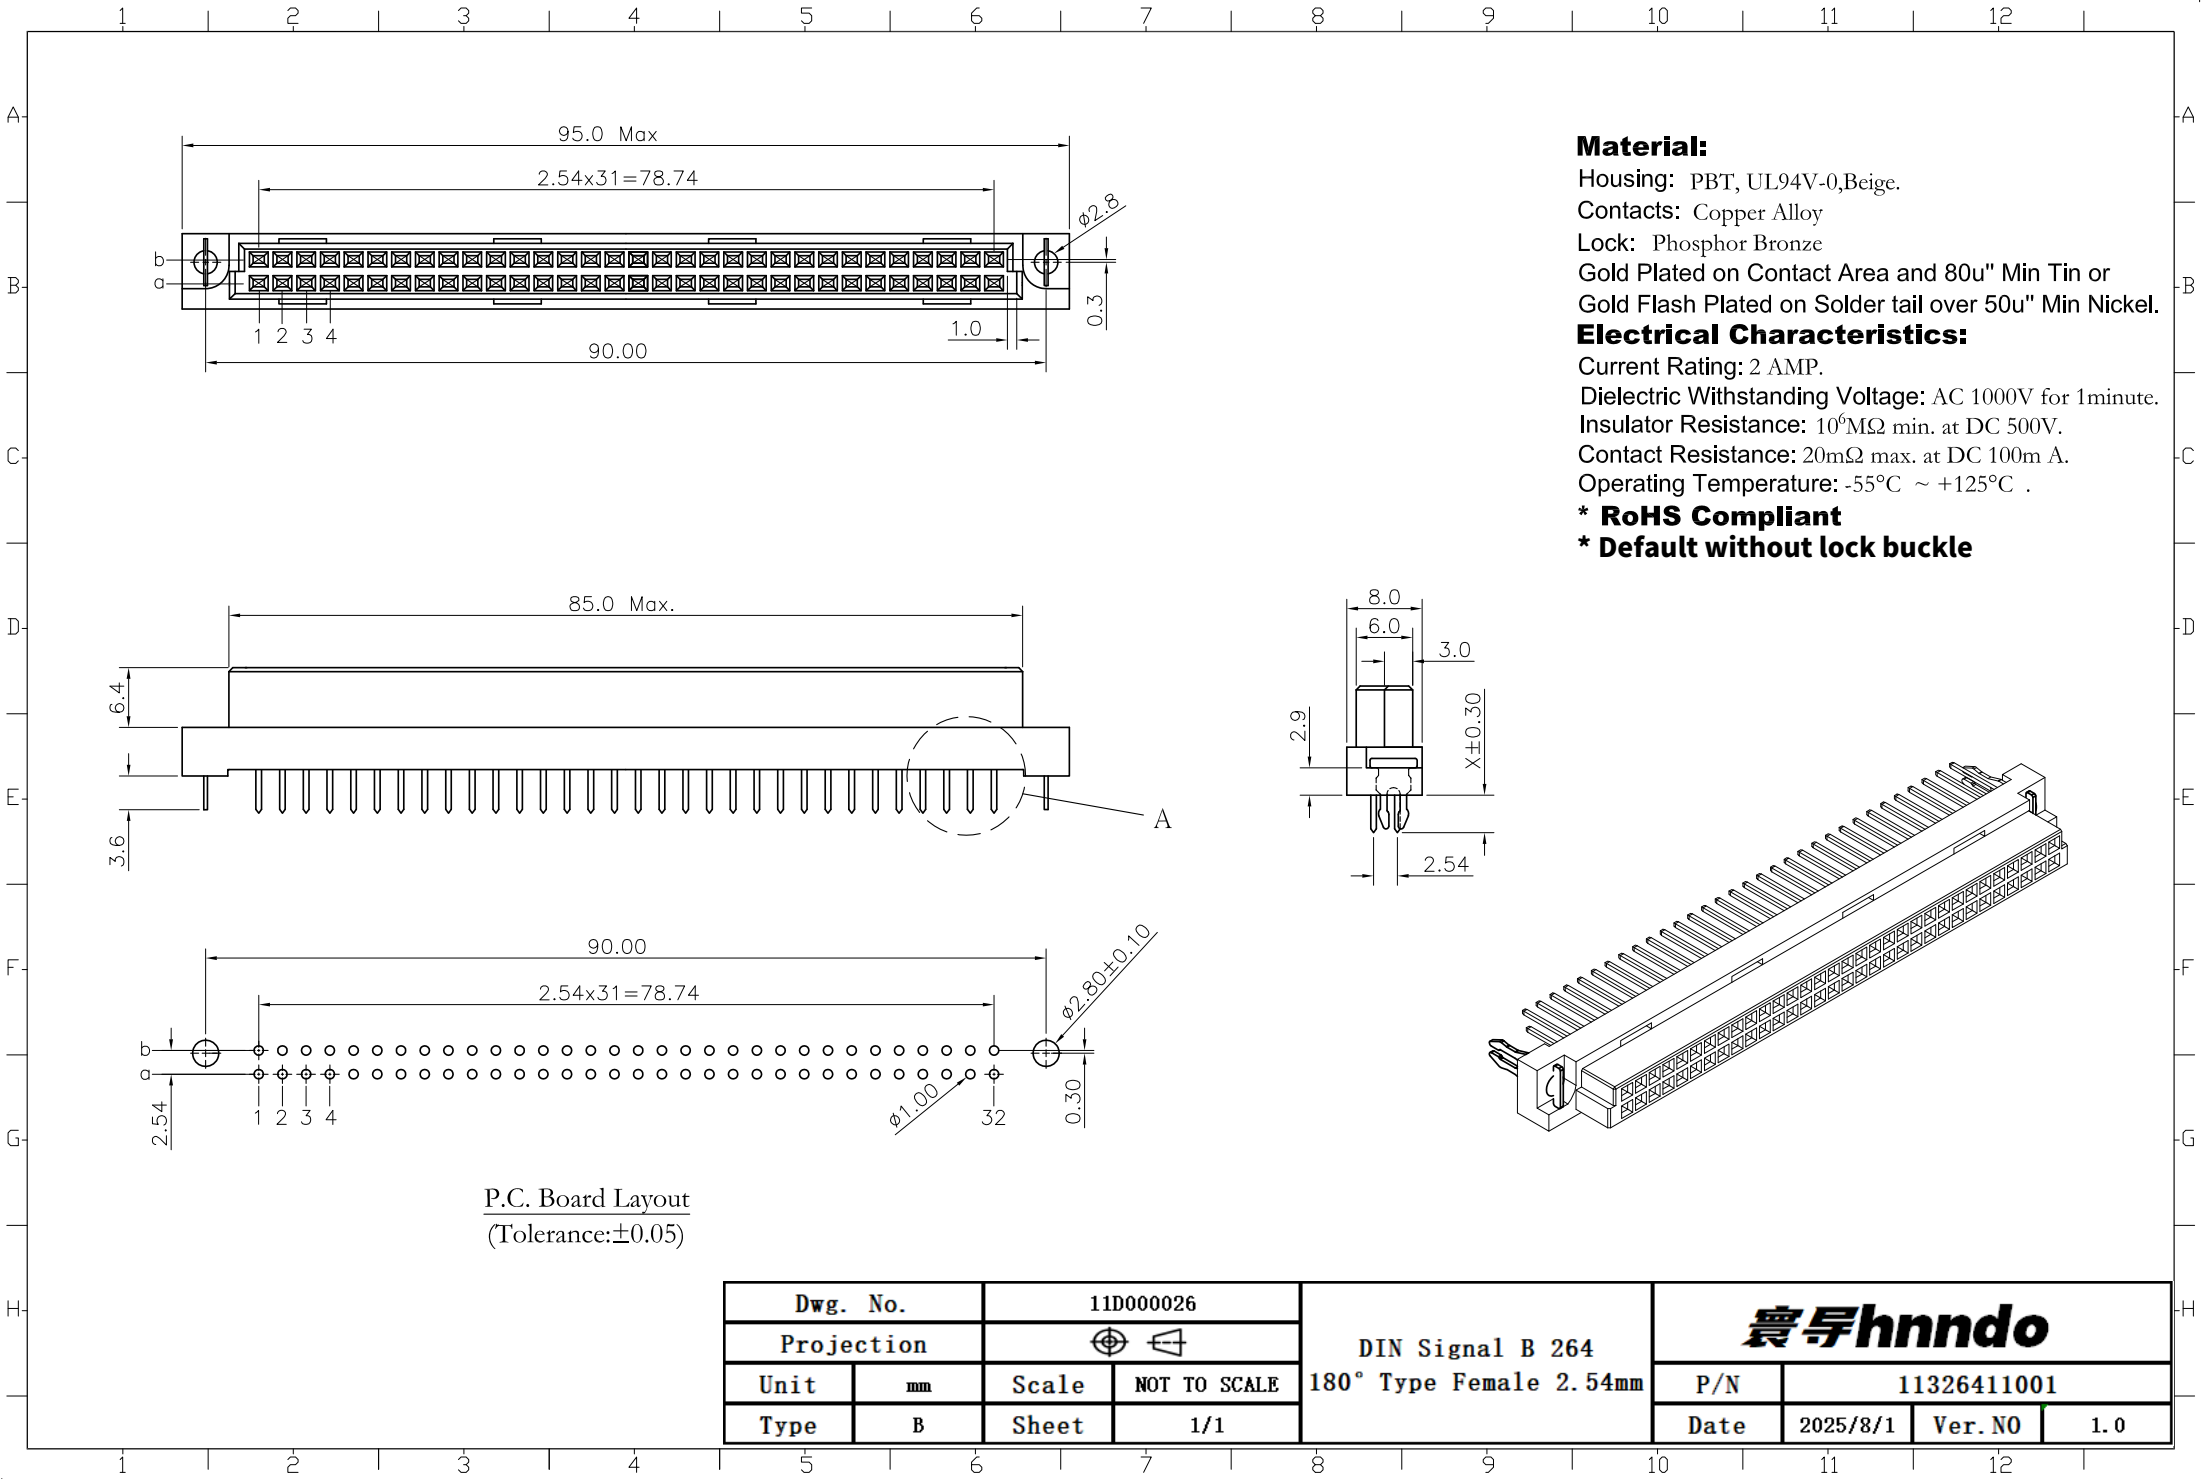

Material:

Housing: PBT, UL94V-0,Beige.

Contacts: Copper Alloy

Lock: Phosphor Bronze

Gold Plated on Contact Area and 80u" Min Tin or
Gold Flash Plated on Solder tail over 50u" Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V for 1minute.

Insulator Resistance: 10⁶MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100m A.

Operating Temperature: -55°C ~ +125°C .

* **RoHS Compliant**

* **Default without lock buckle**

P.C. Board Layout
(Tolerance:±0.05)

Dwg. No.		11D000026		DIN Signal B 264 180° Type Female 2.54mm	寰宇hnndo			
Projection					P/N			
Unit	mm	Scale	NOT TO SCALE		11326411001			
Type	B	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0