

### Material and Plating:

Housing: PBT, UL94V-0, Beige.

Contacts: Brass.

100u" Min Ag or 80u" Min Tin Plated over Nickel  
50u" Min.

### Electrical Characteristics:

Current Rating: 15 AMP.

Dielectric Withstanding Voltage: AC 3100V For 1 minute.


Insulator Resistance: 1000M $\Omega$  min. at DC 500V.

Contact Resistance: 8m $\Omega$  max. at DC 100mA.

Operating Temperature: -55°C ~ +125°C.

**\*RoHS Compliant**

**\*Default without lock buckle**

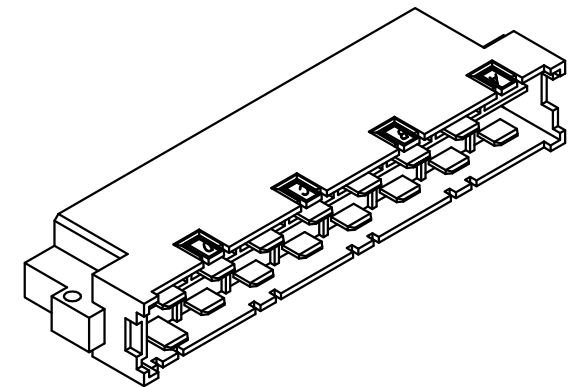

Dwg. No.		11D000056		DIN Power H15 90° Type Male 5.08mm	<b>寰宇hnndo</b>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11511511001		
Type	H	Sheet	1/1	Date	2025/8/1	Ver. NO	1.0	