
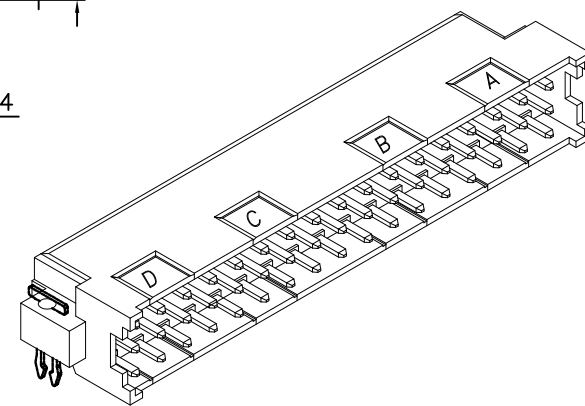
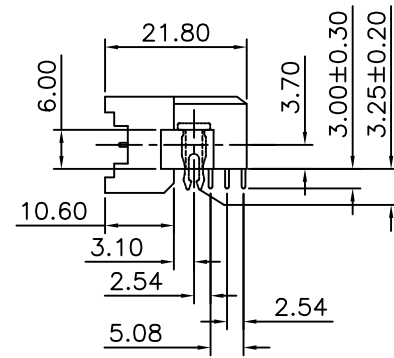
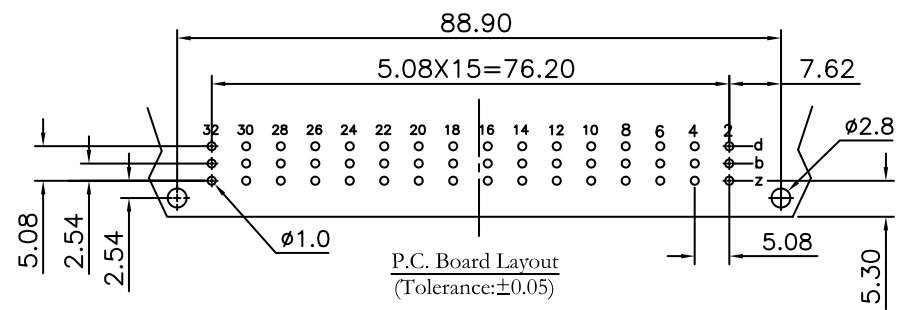
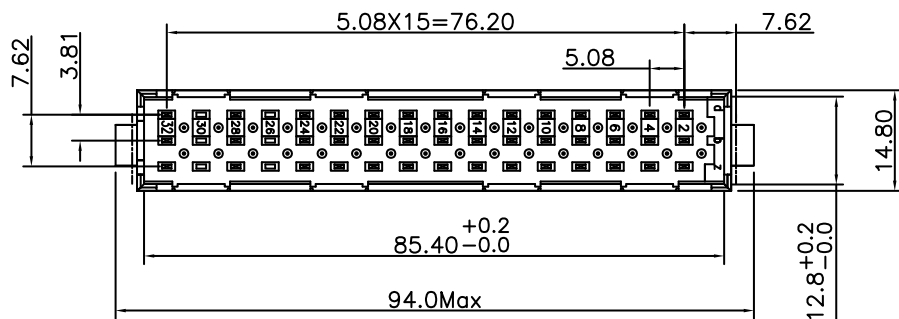


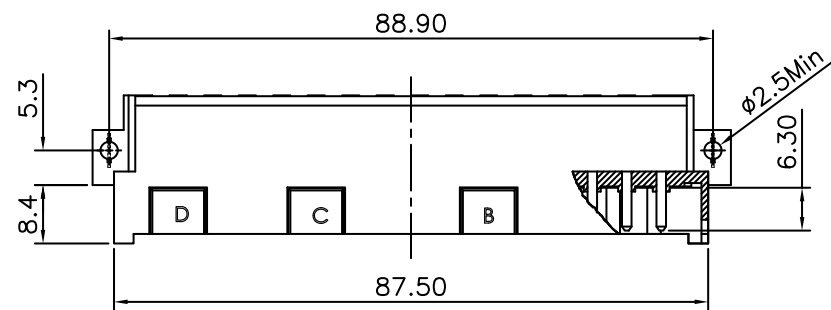

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.
 Lock: Copeer Alloy.

Electrical Characteristics:

Current Rating: 5.6AMP.
 Dielectric Withstanding Voltage: AC1550V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 15mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

***Default without lock buckle**

Dwg. No.		11D000051		DIN Power F 348 90° Type Male 5.08mm	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11614811001		
Type	F	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0