
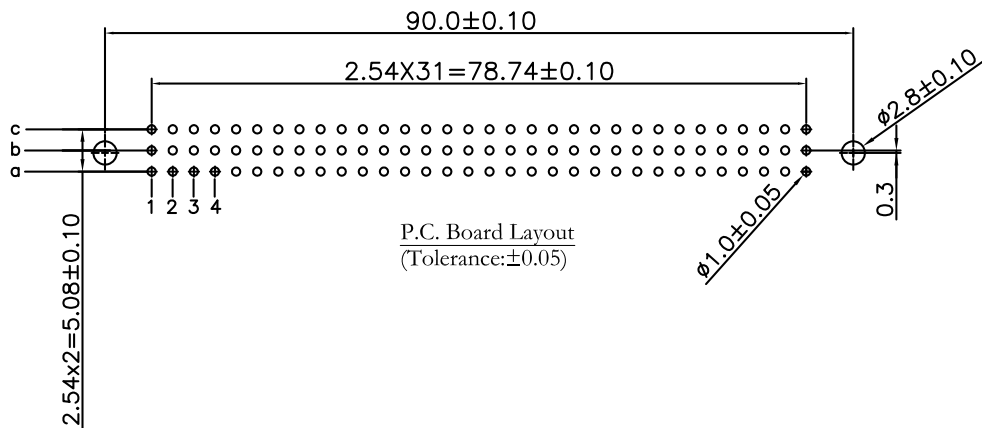
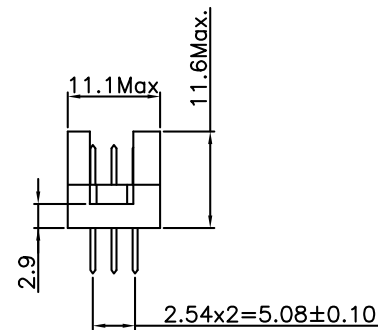
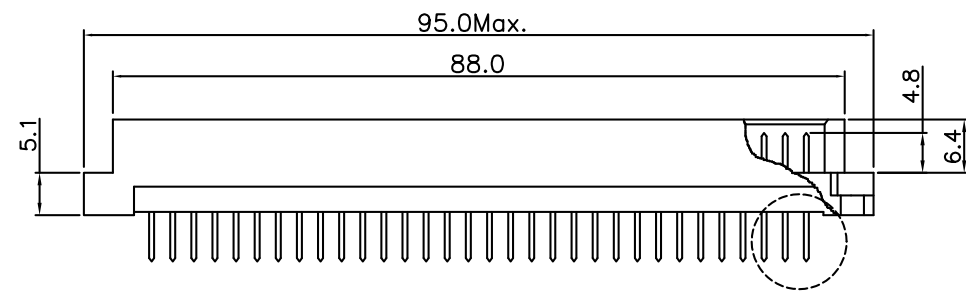


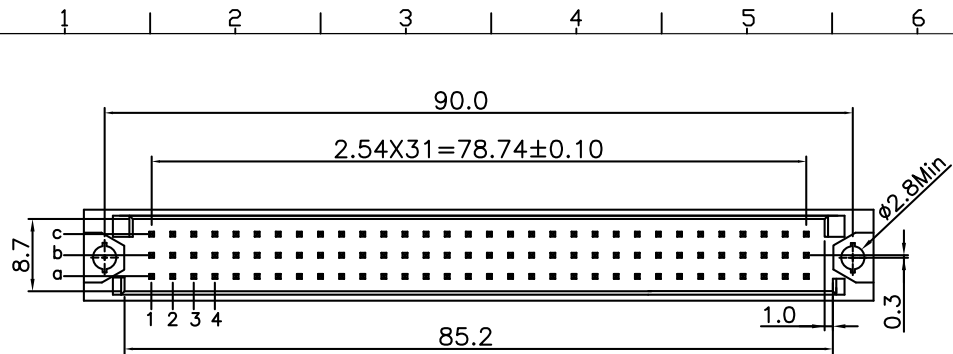

Material and plating:

Housing: PBT, UL94V-0 , Beige .

Contacts: Brass.

Gold Plated on Contact Area and 80 u" min Tin or
Gold Flash Plated on Solder Tail or Press Fit over 50 u"
min Nickel

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: 10^6 M Ω min. at DC 500V.


Contact Resistance: 20m Ω max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

***Default without lock buckle**

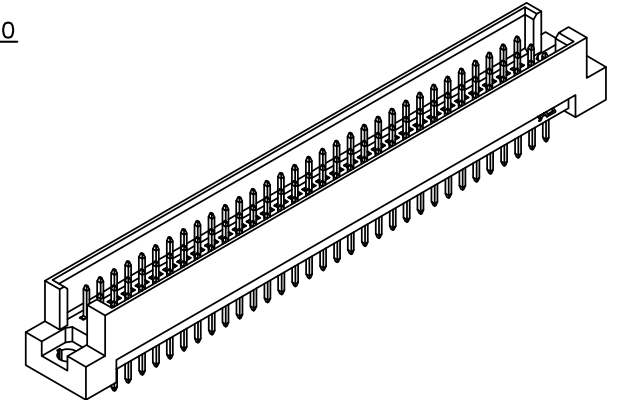

Dwg. No.		11D000035		DIN Signal R 364 180° Type Male 2.54mm	實學hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11136411001		
Type	R	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0