
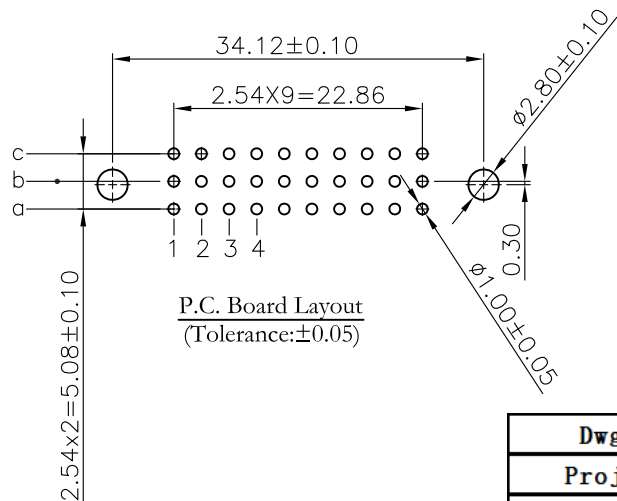
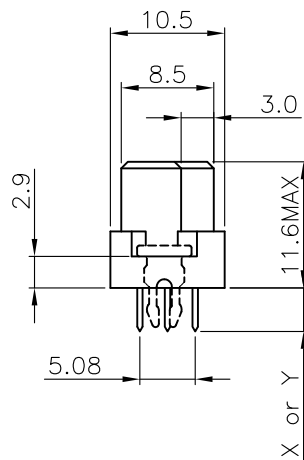
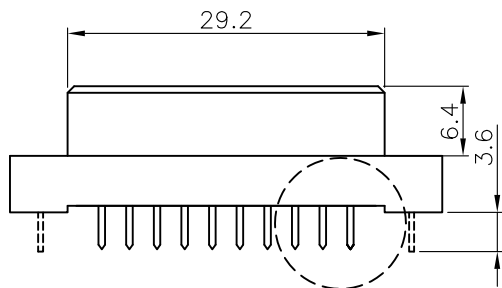


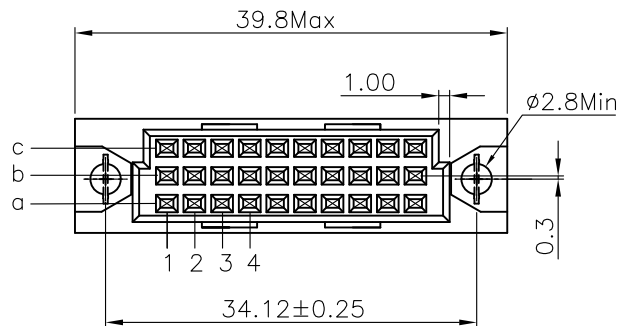

Material and Plating:

Housing: PBT, UL94V-0, Beige.

Contacts: Copper Alloy

Lock: Phosphor Bronze.

Gold Plated on Contact Area and 80u" Min Tin Plated or Gold Flash on Solder Tail or Press Fit over Nickel 50u" Min.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: $10^6 M\Omega$ min. at DC 500V.

Contact Resistance: $20 m\Omega$ max. at DC 100mA.

Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

***Default without lock buckle**

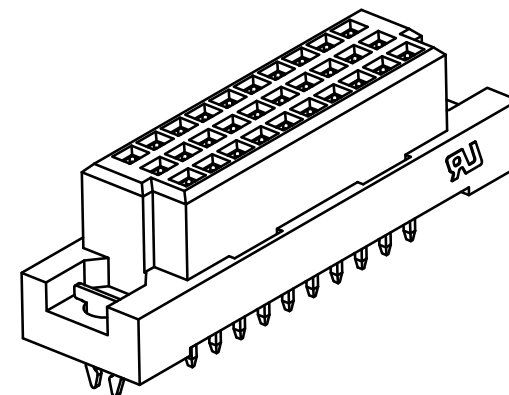

Dwg. No.		11D000014		DIN Signal 2C 332 180° Type Female 2.54mm	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11163211001		
Type	2C	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0