
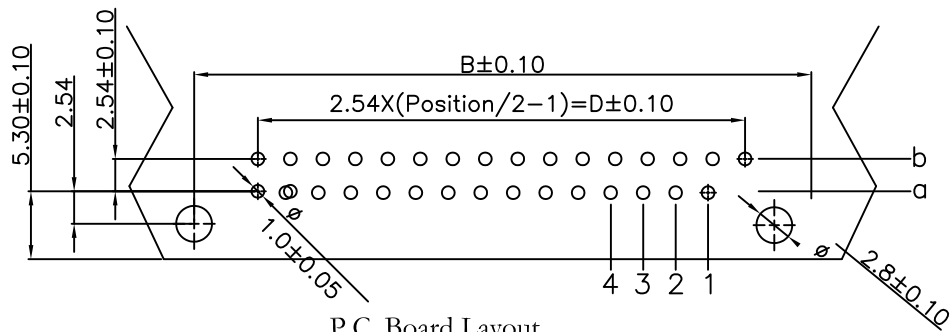

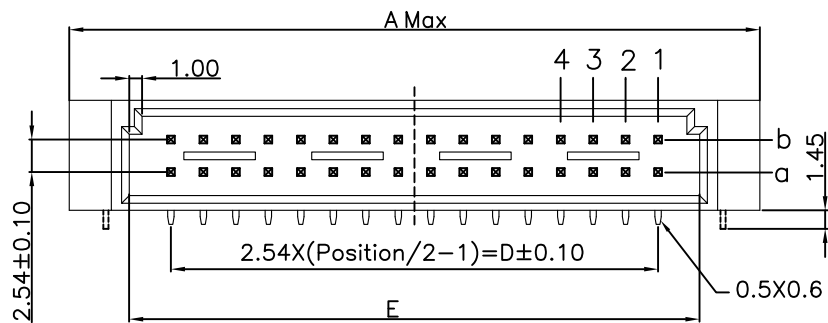


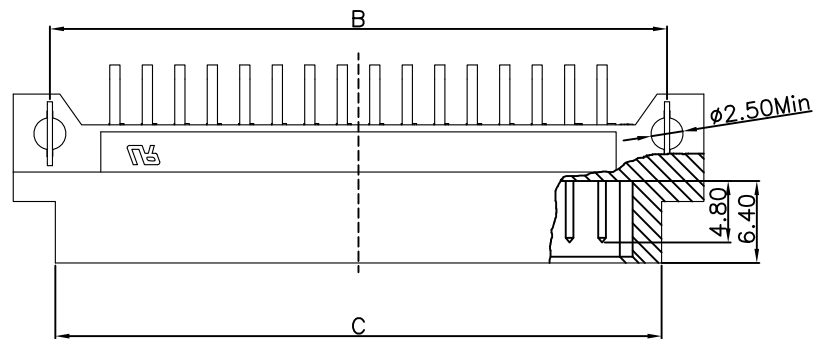

P.C. Board Layout
(Tolerance:±0.05)

Material and Plating:

Housing:PBT, UL94V-0,Beige.

Contacts: Brass.

Lock: Phosphor Bronze.

Gold Plated on contact Area and 80u" Min Tin or Gold

Flash Plated on solder tail over 50u" Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: 1000MΩ Min. at DC 500V.

Contact Resistance: 20mΩ Max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

***Default without lock buckle**

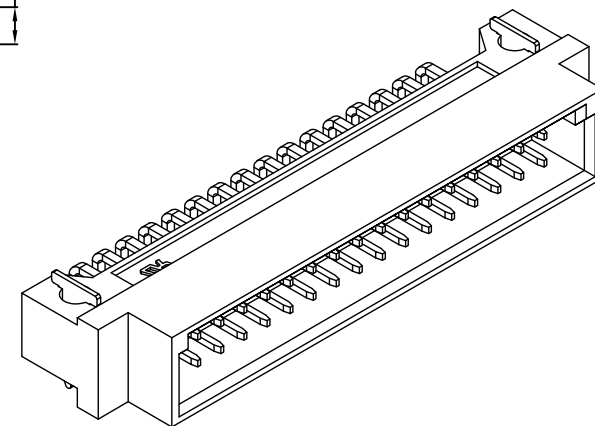

Dwg. No.		11D000005		DIN Signal 2B 232 90 Type Male 5.08mm	寰宇hnndo			
Projection					P/N		11353211001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	2B	Sheet	1/1					