

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Phosphor Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance:1000M min. at DC 500V.

Ⓜ Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

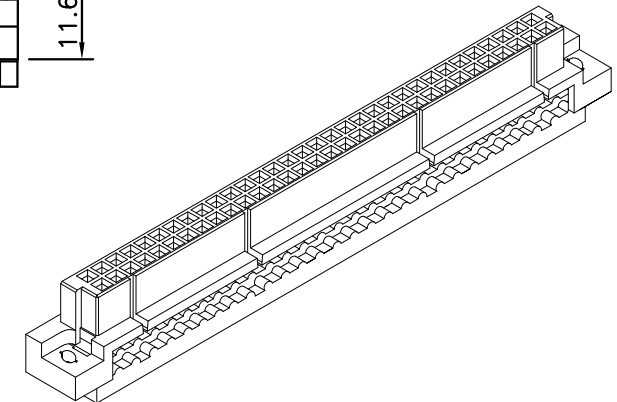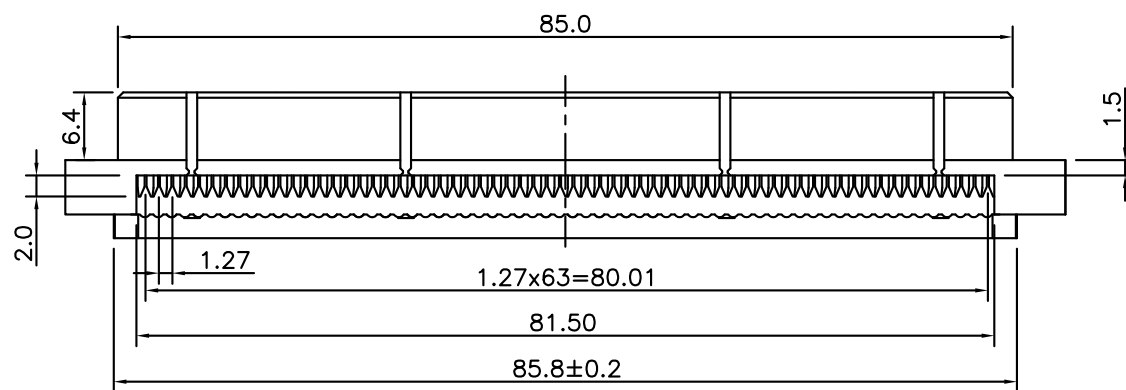

Dwg. No.		11D000048		DIN IDC Rows 264 Type Female 2.54mm				
Projection					P/N		11326418001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	IDC	Sheet	1/1					