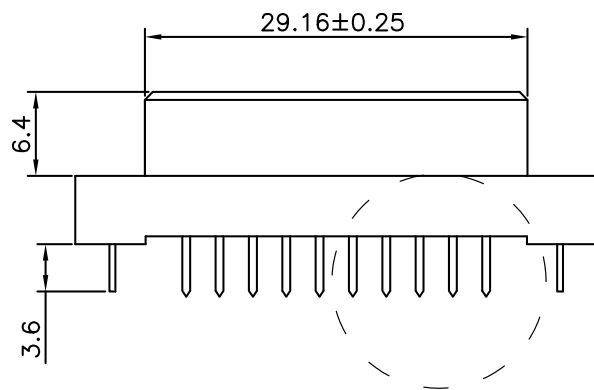
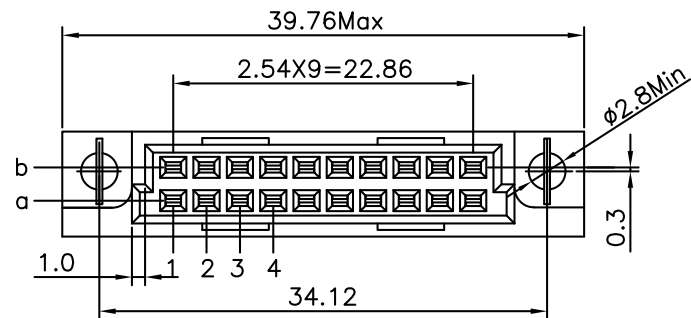


P.C. Board Layout
(Tolerance:±0.05)

Material and Plating:

Housing: PBT, UL 4V-0, Beige.

Contacts: Copper Alloy.

Lock: Phosphor Bronze.

Gold Plated on contact Area and 80u"Min Tin or Gold Flash plated on solder tail over 50u"Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.


Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

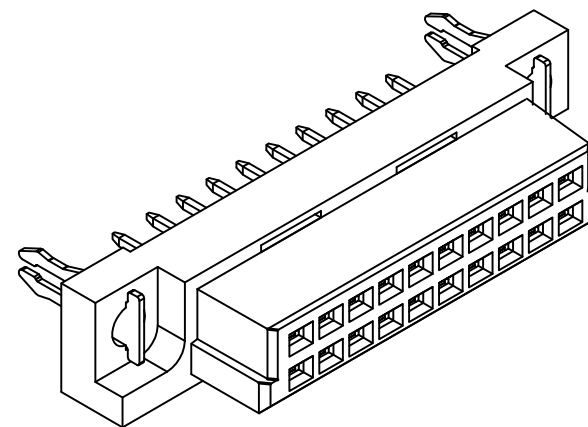

Dwg. No.		11D000002		DIN Signal 3B 220 90° Type Female 2.54mm				
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11362011001		
Type	3B	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0