
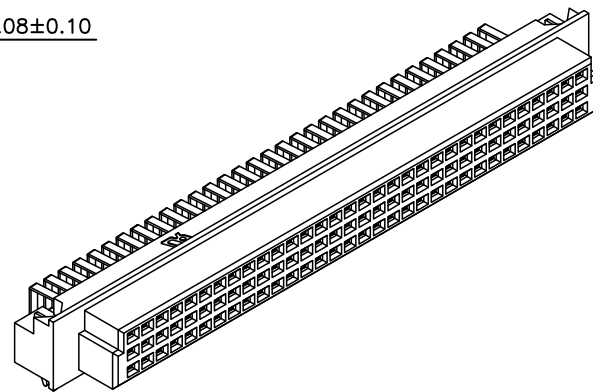
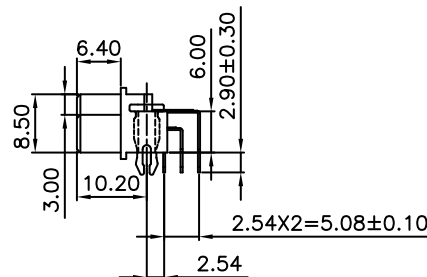
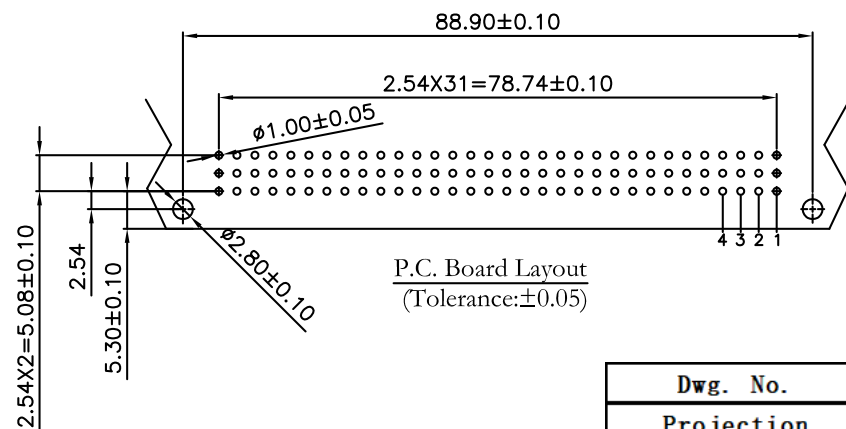
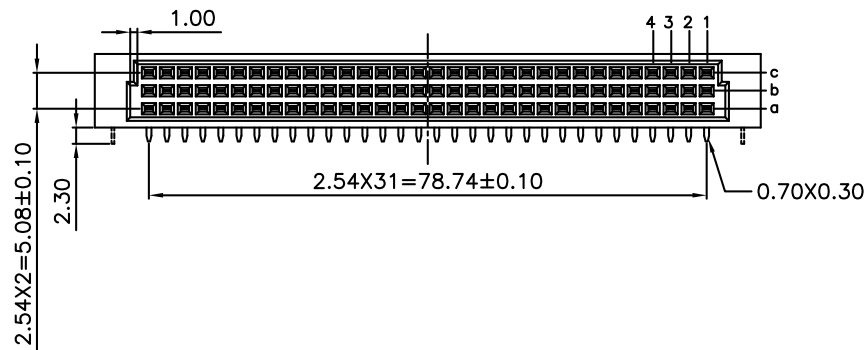


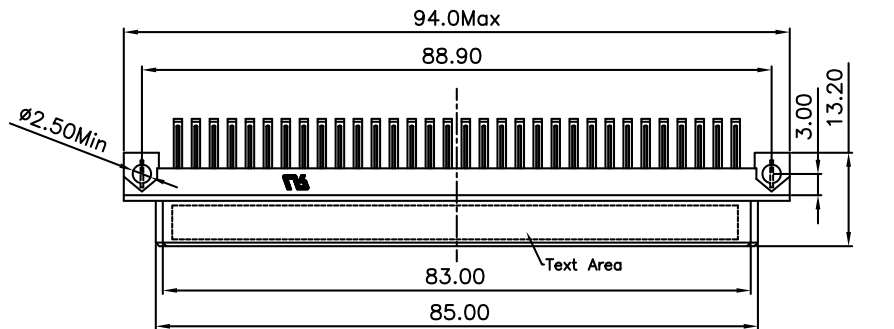

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20 mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

***Default without lock buckle**

Dwg. No.		11D000040		DIN Signal R 396 90° Type Female 2.54mm	賽導hnndo			
Projection					P/N		11149611001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	R	Sheet	1/1					