

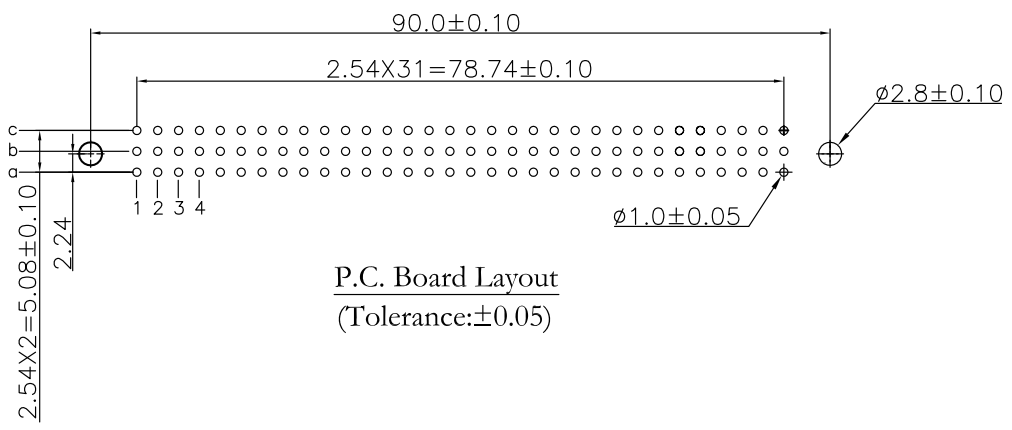

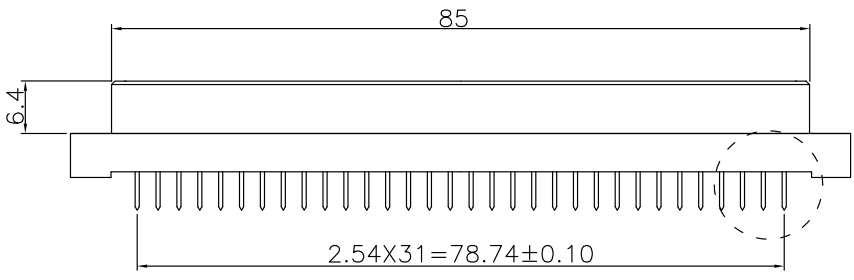


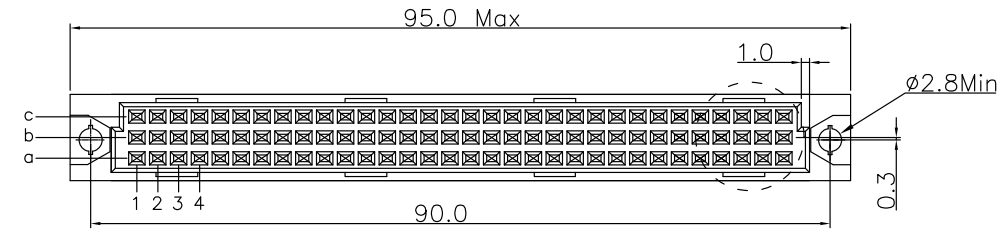

Material and Plating:
Housing: PBT,UL94V-0,Beige
Contacts: Copper Alloy.
Gold Plated on Contact Area and 80u" Min Tin or Gold Flash
Plated on Press Fit over Nickel 50u" Min .

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage:
AC 1000V For 1 minute.
Insulator Resistance: $10^6 M\Omega$ min. at DC 500V.
Contact Resistance: $20 m\Omega$ max. at DC 100mA.
Operating Temperature: $-55^{\circ}C \sim +125^{\circ}C$.

***RoHS Compliant**
***Default without lock buckle**

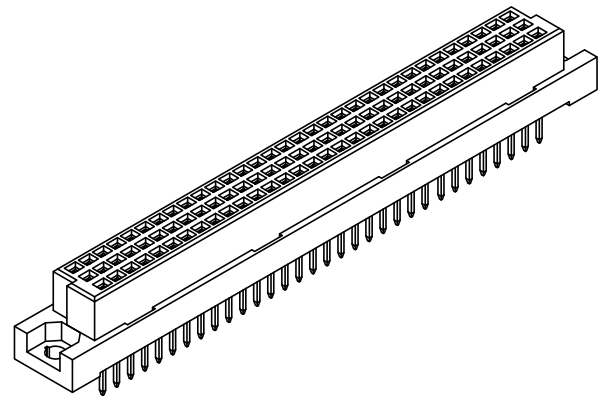

Dwg. No.		11D000034		DIN Signal C 364 180° Type Female 2.54mm	寰宇hnndo			
Projection					P/N	11126411001		
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	C	Sheet	1/1					