
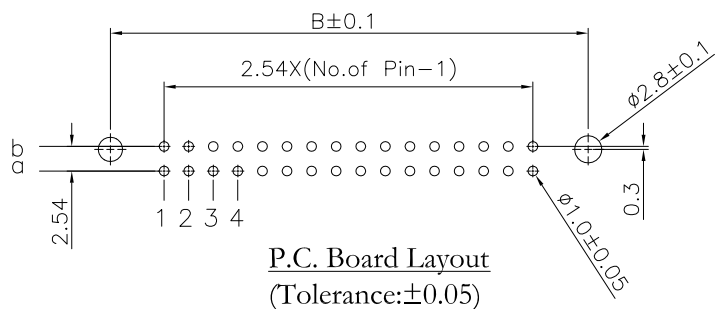

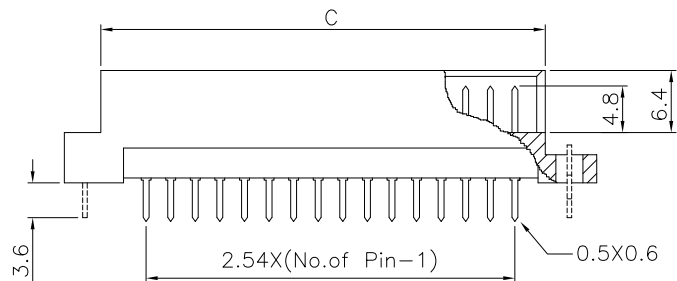


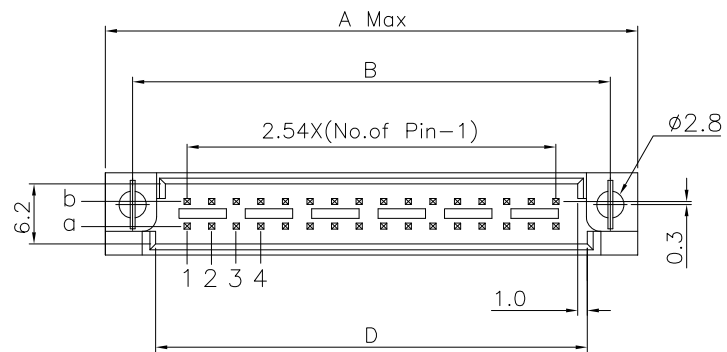

Material and Plating:

Housing: PBT, UL94V-0, Beige.

Contacts: Brass.

Lock: Phosphor Bronze.

Gold Plated on Contact Area and 80u" Min Tin or Gold Flash
Plated on Solder Tail over Nickel 50u" Min .

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC1000V For 1 minute.


Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

***Default without lock buckle**

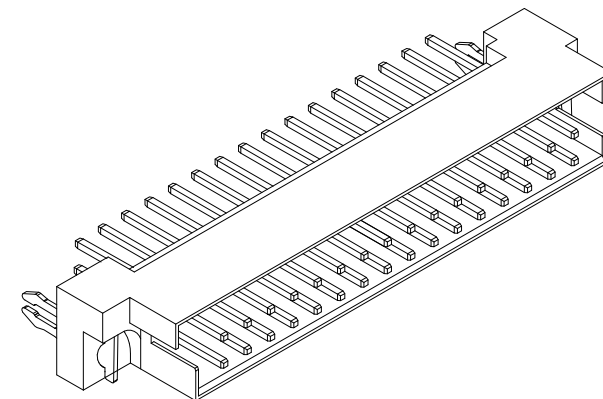

Dwg. No.		11D000003		DIN Signal 3Q 220 180° Type Male 2.54mm				
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11372011001		
Type	3Q	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0