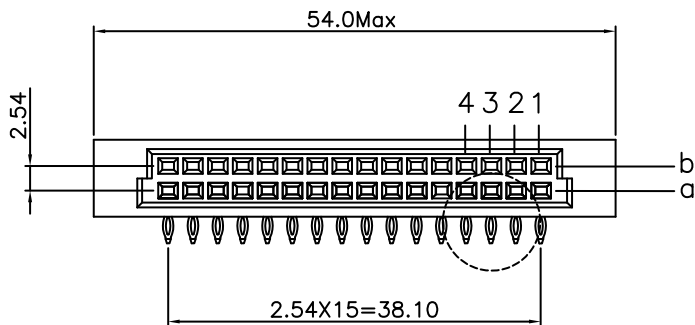
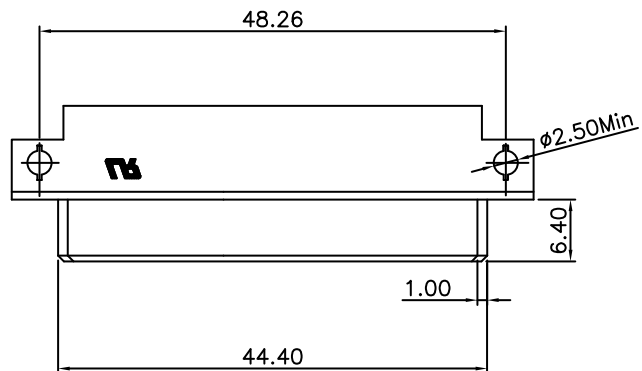


P.C. Board Layout

Material:


Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 20m Ω max. at DC 100mA.
Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

***Default without lock buckle**

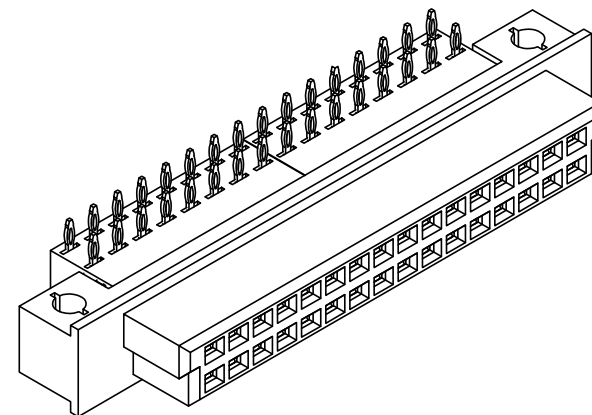

Dwg. No.		11D000008		DIN Signal 2Q 232 180° Type Female 2.54mm	寶孚hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11383211001		
Type	2Q	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0