


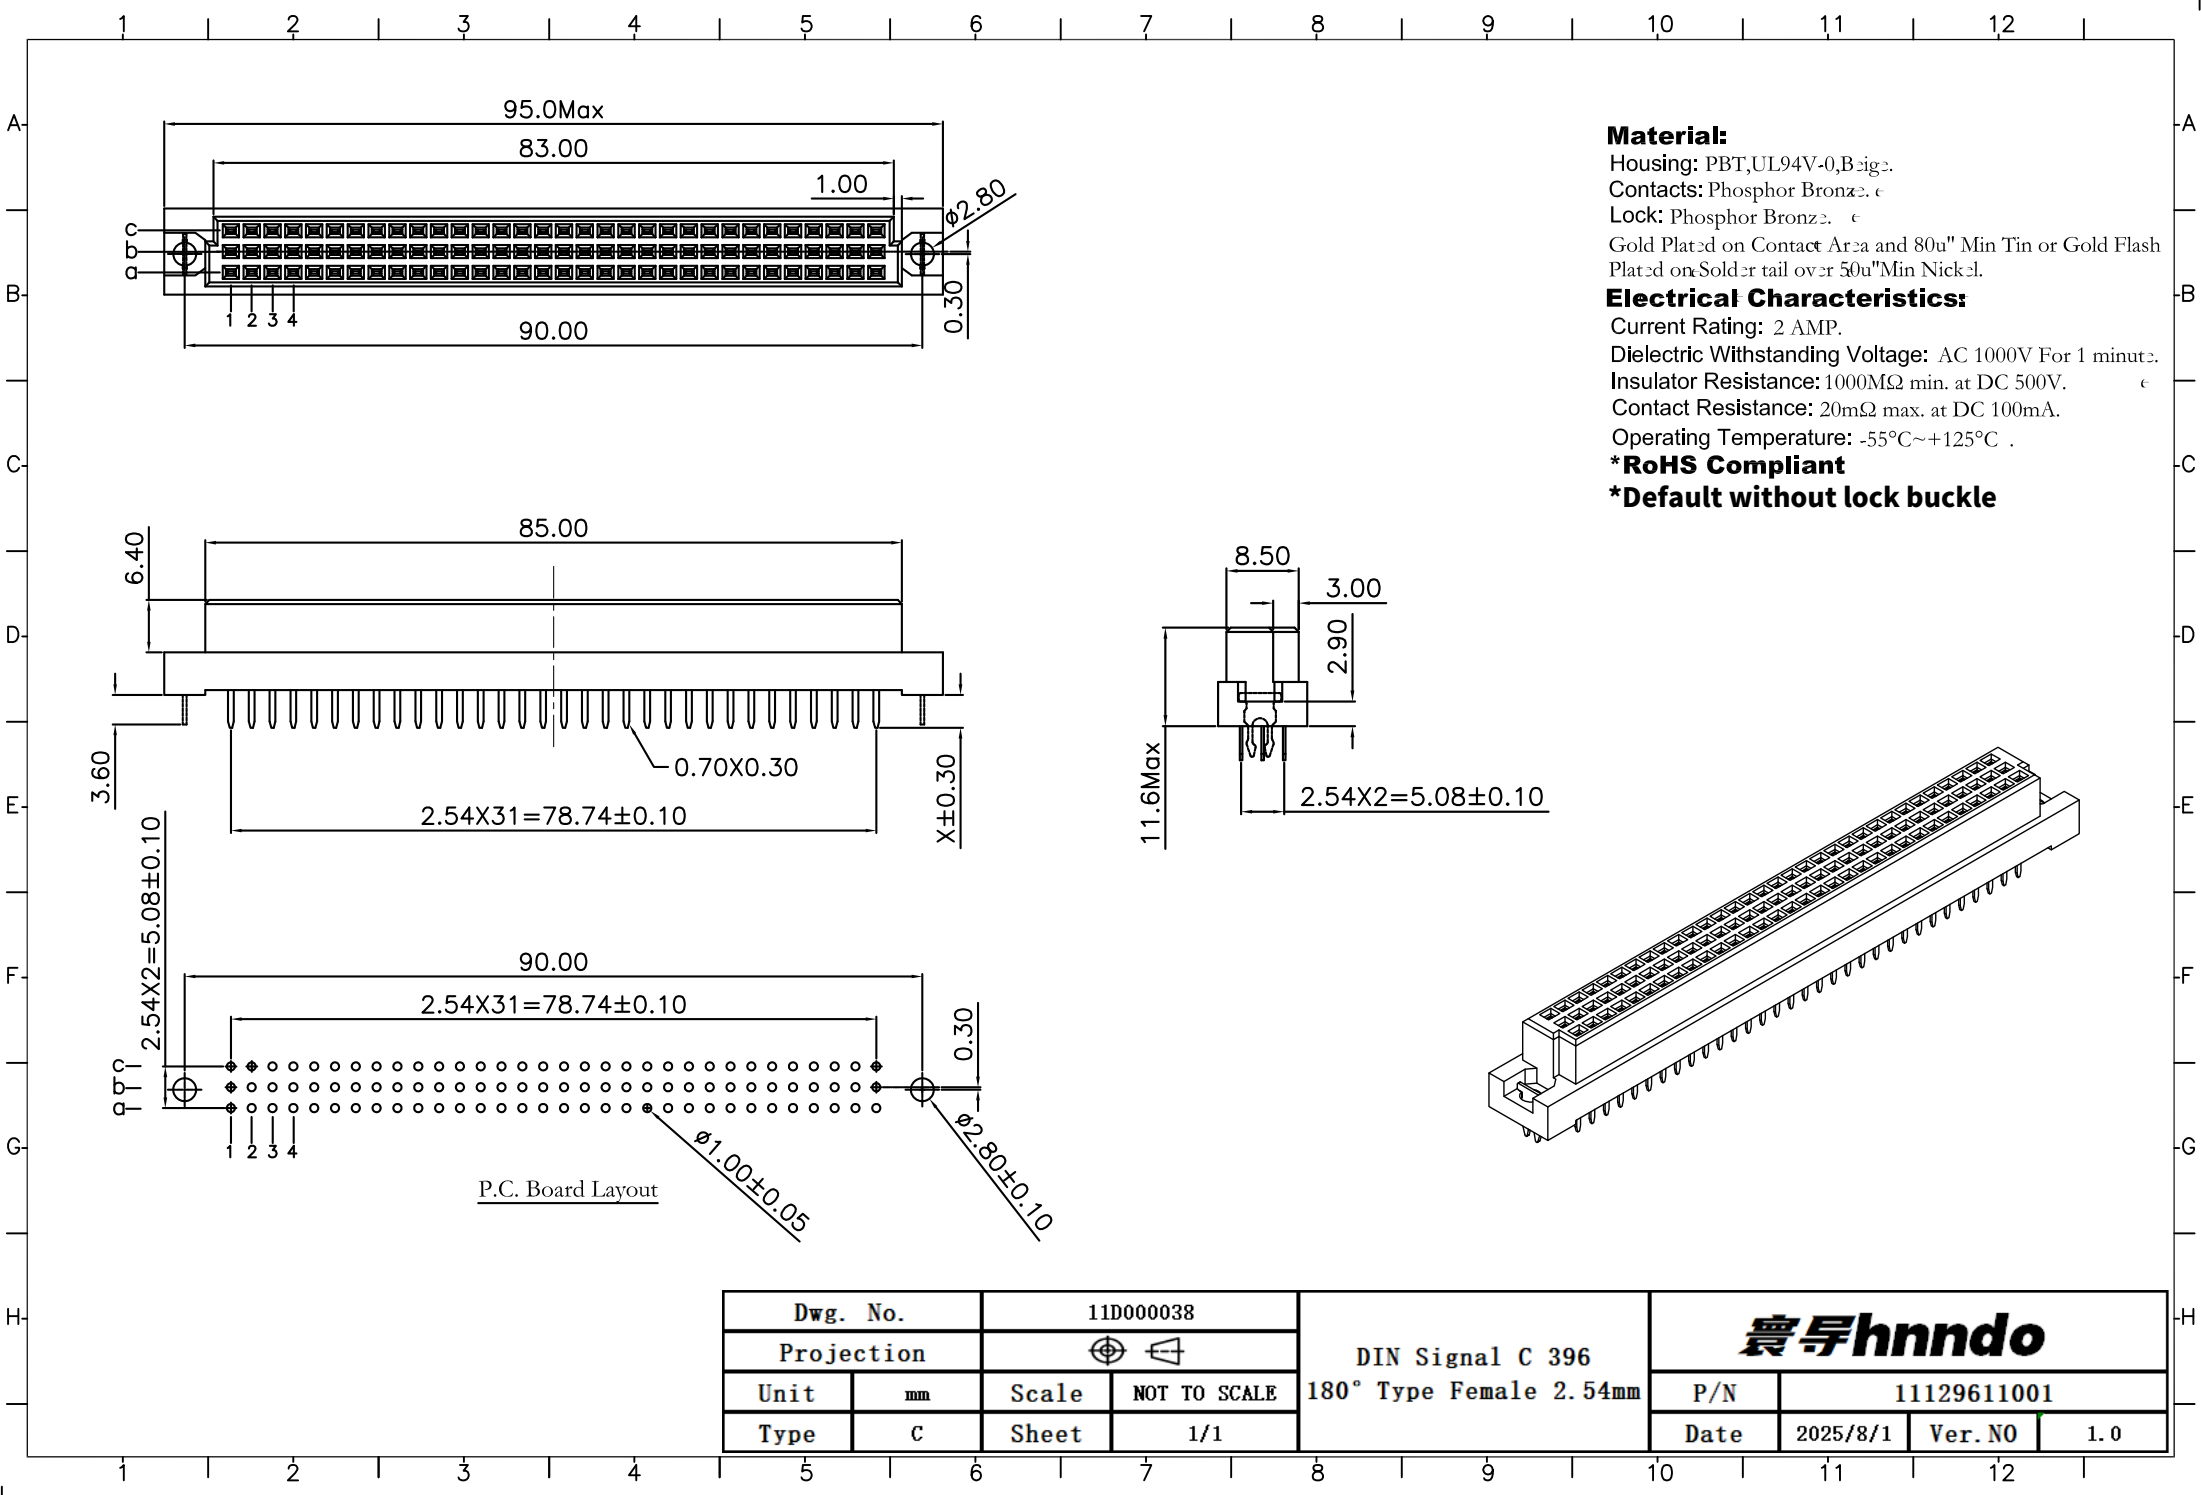

Material:

Housing: PBT,UL94V-0,Big.
Contacts: Phosphor Bronze.
Lock: Phosphor Bronze.
Gold Plated on Contact Area and 80u" Min Tin or Gold Flash
Plated on Solder tail over 50u"Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

***Default without lock buckle**

Dwg. No.		11D000038		DIN Signal C 396 180° Type Female 2.54mm	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11129611001		
Type	C	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0