


1 2 3 4 5 6 7 8 9 10 11 12

A

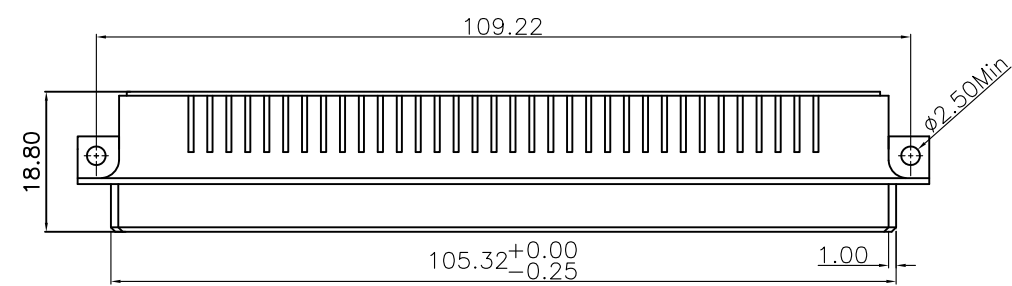

Material:

Housing: Thermoplastic Polyster Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C .



***RoHS Compliant**

***Default without lock buckle**


B

C


D

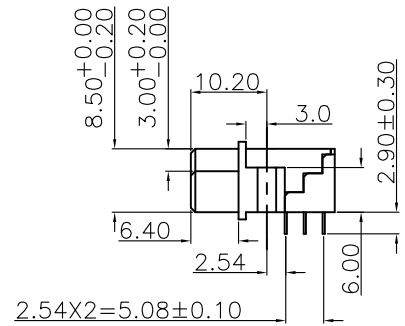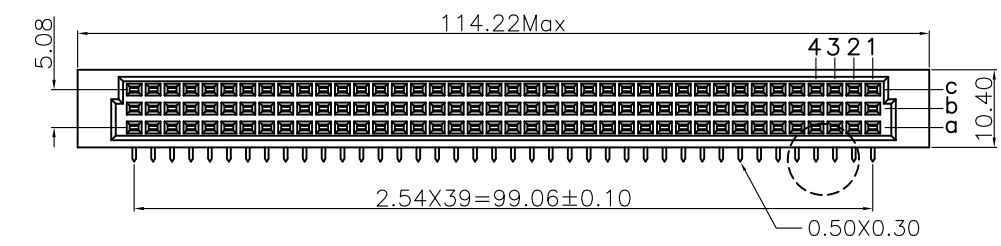

E

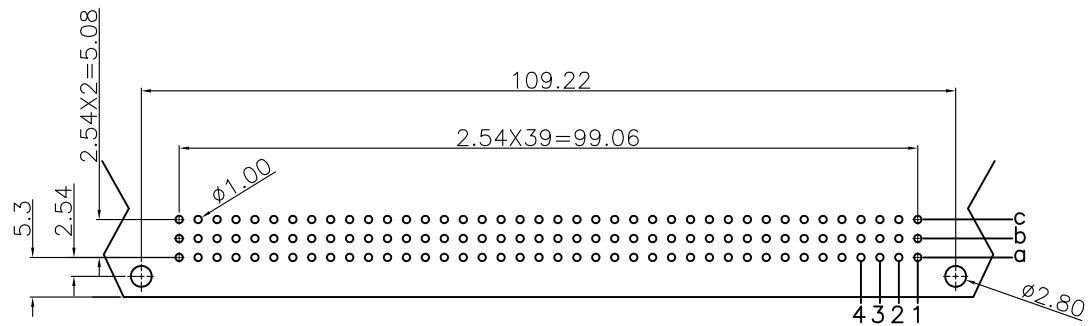

P.C. Board Layout

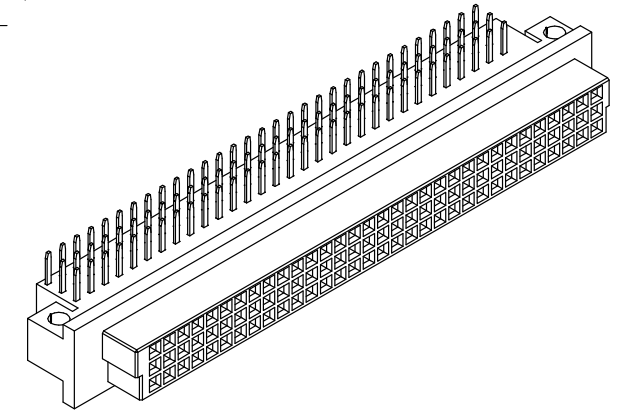

F

G

H

Dwg. No.		11D000061		DIN Signal R 360 90° Type Female 5.08mm	震學hnndo			
Projection					P/N	11246011001		
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	R	Sheet	1/1					

1 2 3 4 5 6 7 8 9 10 11 12