
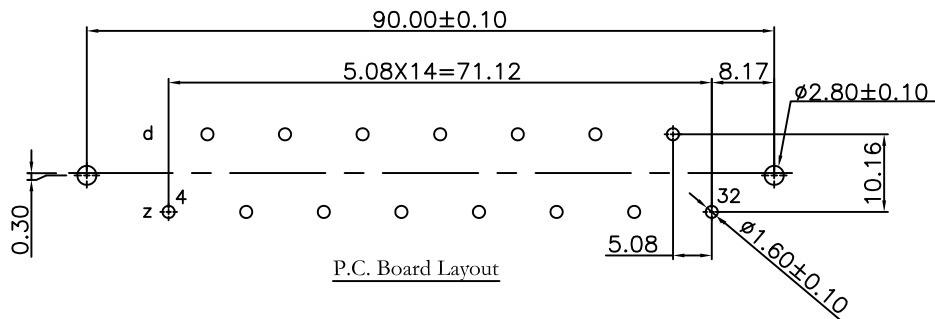

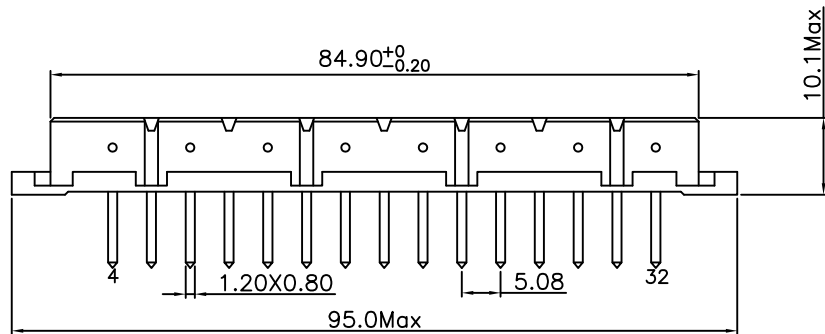


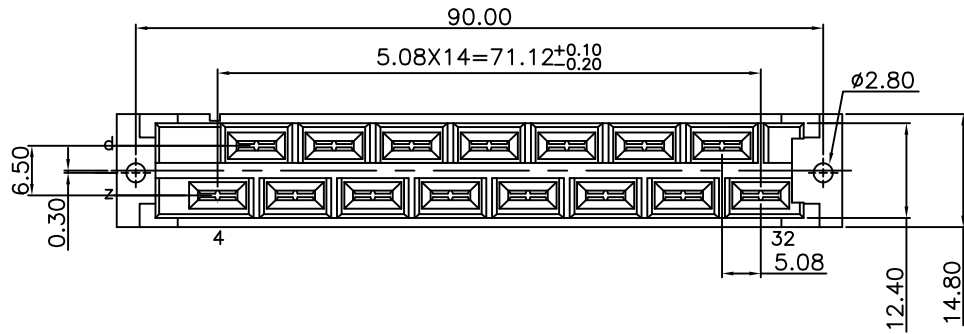

P.C. Board Layout

Material and Plating:

Housing: PBT, UL94V-0, Beige.

Contacts: Copper Alloy.

100u" Min Ag or 80u" Min Tin Plated over Nickel

50u" Min.

Electrical Characteristics:

Current Rating: 15 AMP.

Dielectric Withstanding Voltage: AC 3100V for 1minute.


Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 8mΩ max. at DC 100m A.

Operating Temperature: -55°C ~ +125°C.

* RoHS Compliant

* Default without lock buckle

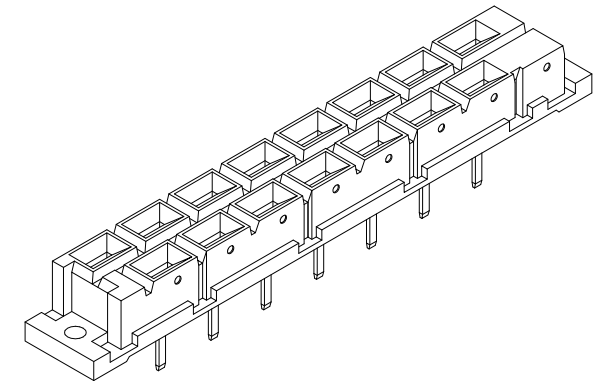

Dwg. No.		11D000057		DIN Power H15 180° Type Female 5.08mm	寰宇hnndo			
Projection					P/N		11521511001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	H	Sheet	1/1					