

P.C. Board Layout
(Tolerance:±0.05)

Material and Plating:

Housing:PBT UL94V-0. Beige.

Contacts: Copper Alloy .

Gold plated on Contact Area and 80u" Min Tin Plated or
Gold Flash on Solder Tail over Nickel 50u" Min.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V for 1minute.


Insulator Resistance: 10⁶ MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100m A.

Operating Temperature: -55°C ~ +125°C .

* **RoHS Compliant**

* **Default without lock buckle**

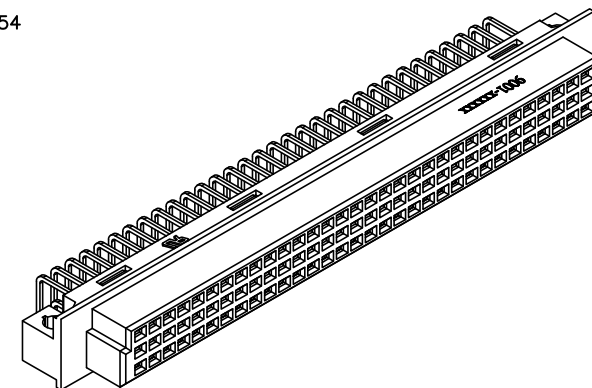

Dwg. No.		11D000036		DIN Signal R 364 90° Type Female 2.54mm	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11146411001		
Type	R	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0