
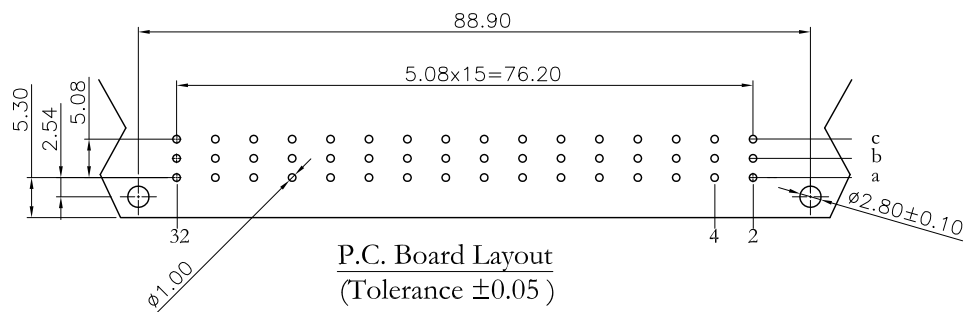

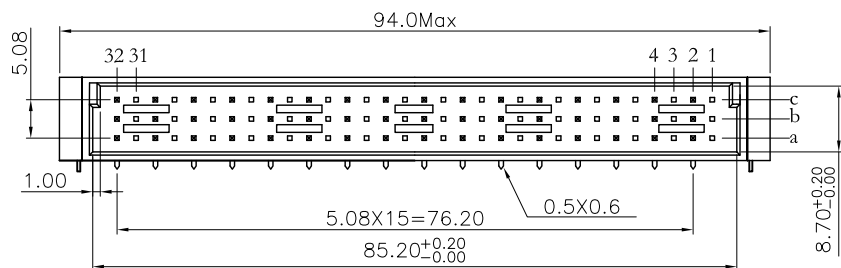


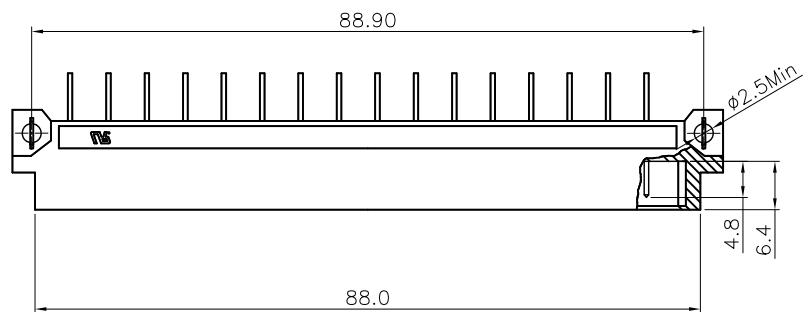

Material and Plating:

Housing: PBT, UL94V-0, Beige.

Contacts: Brass.

Lock: Phosphor Bronze.

Gold Plated on Contact Area and 80u" Min Tin Plated or Gold Flash on solder tail over Nickel 50u" Min.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

***Default without lock buckle**

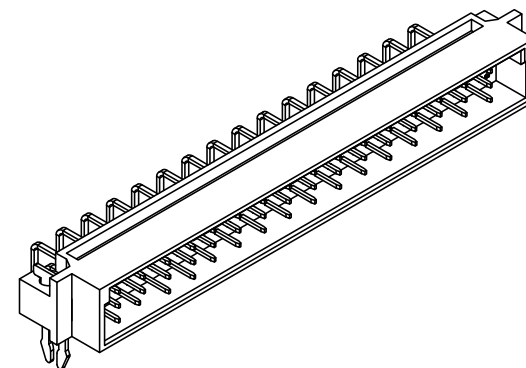

Dwg. No.		11D000029		DIN Signal C 332 90° Type Male 5.08mm	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11213211001		
Type	C	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0