
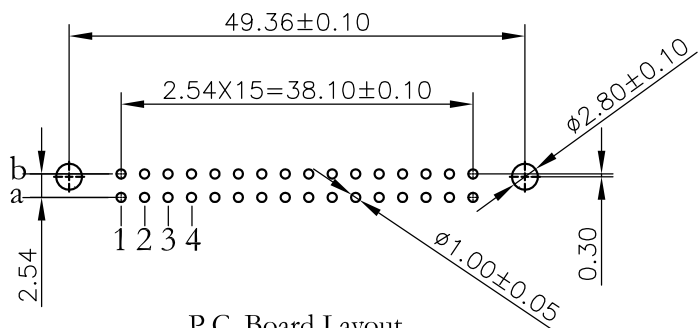
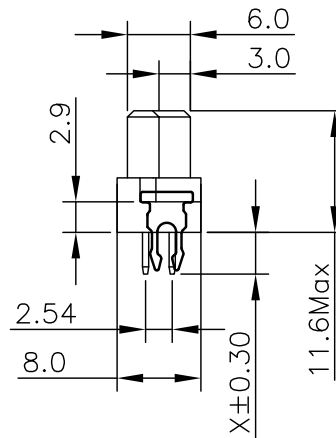
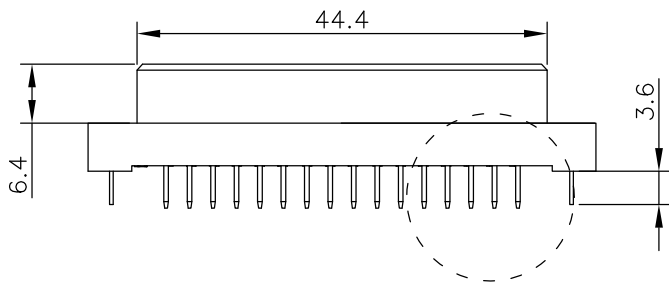


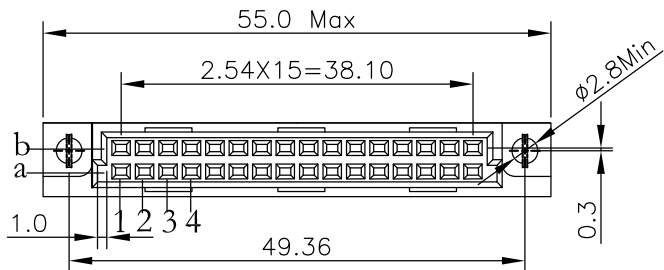

P.C. Board Layout
(Tolerance:±0.05)

Material and Plating:

Housing: PBT, UL94V-0, Beige.

Contacts: Copper Alloy.

Lock: Phosphor Bronze.

Gold Plated on contact Area and 80u"Min Tin or Gold Flash plated on solder tail over 50u"Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

***Default without lock buckle**

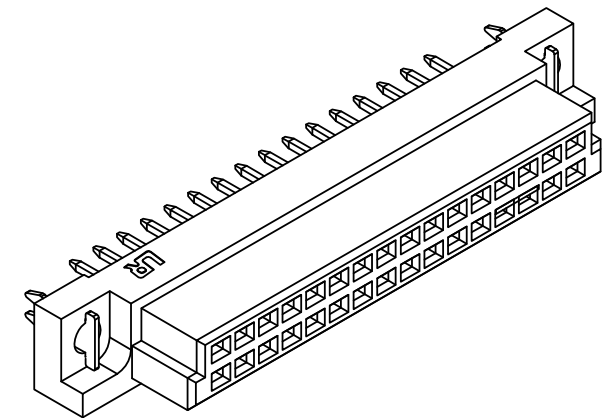

Dwg. No.		11D000006		DIN Signal 2B 232 180 Type Female 5.08mm	寰宇hnndo			
Projection					P/N		11363211001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	2B	Sheet	1/1					