


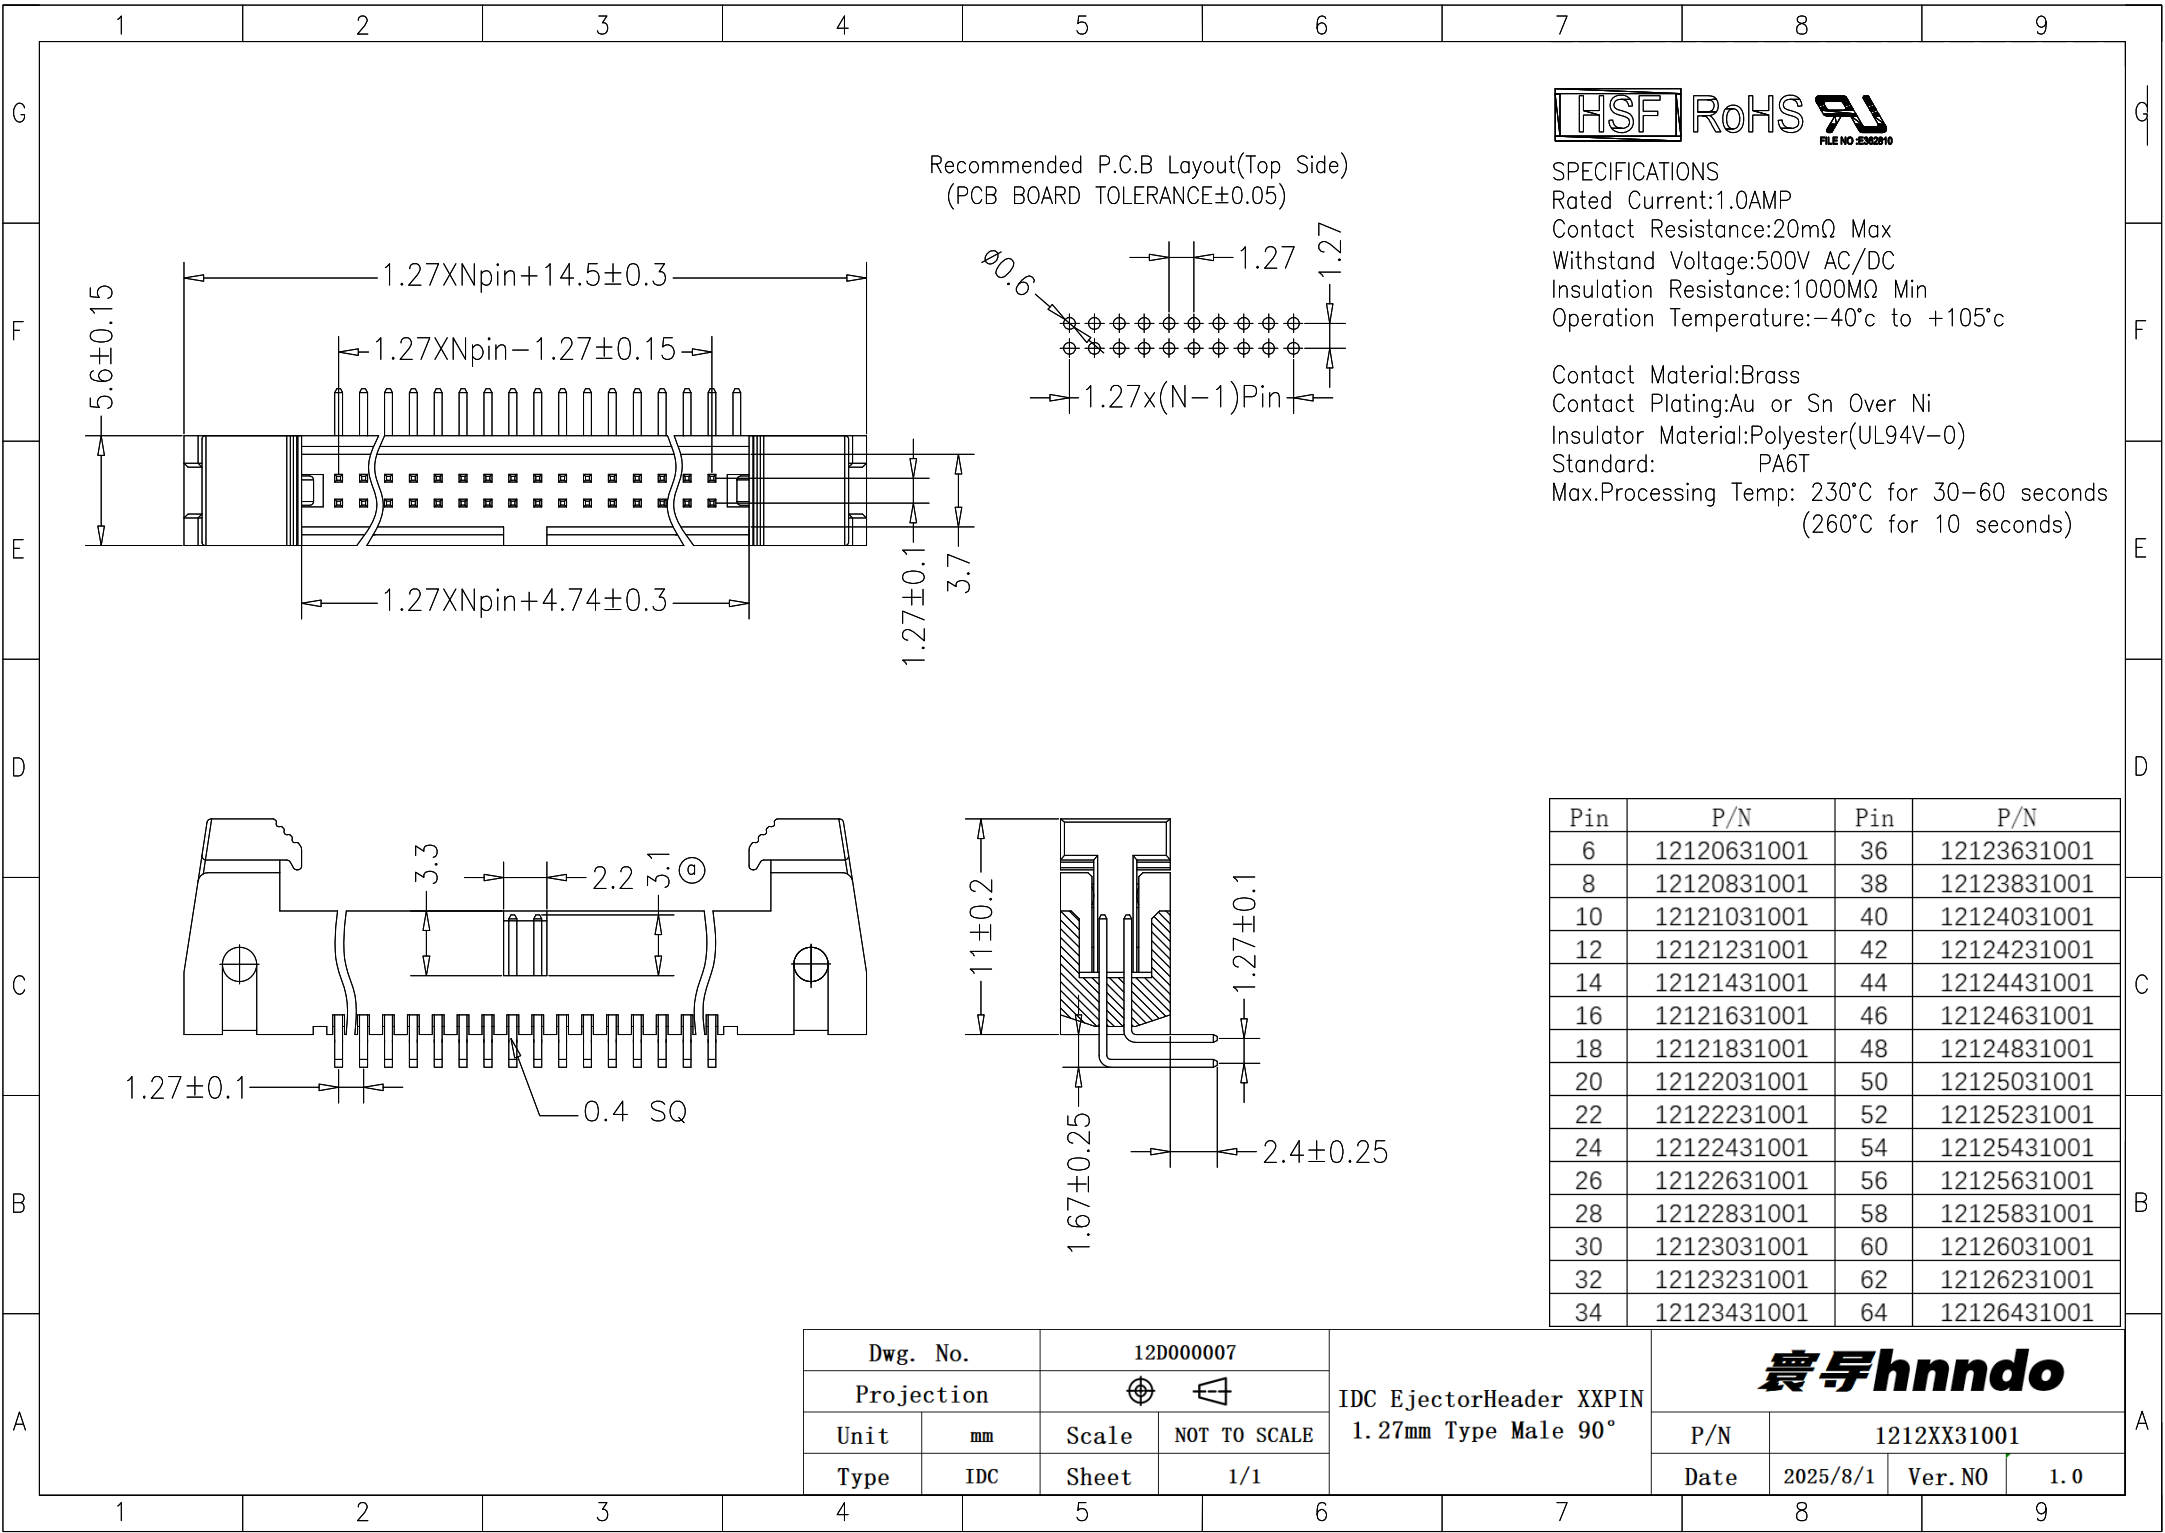

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

Pin	P/N	Pin	P/N
6	12120631001	36	12123631001
8	12120831001	38	12123831001
10	12121031001	40	12124031001
12	12121231001	42	12124231001
14	12121431001	44	12124431001
16	12121631001	46	12124631001
18	12121831001	48	12124831001
20	12122031001	50	12125031001
22	12122231001	52	12125231001
24	12122431001	54	12125431001
26	12122631001	56	12125631001
28	12122831001	58	12125831001
30	12123031001	60	12126031001
32	12123231001	62	12126231001
34	12123431001	64	12126431001

Dwg. No.		12D000007		IDC EjectorHeader XXPIN 1.27mm Type Male 90°	寰宇hnn do			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1212XX31001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0