




12



SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

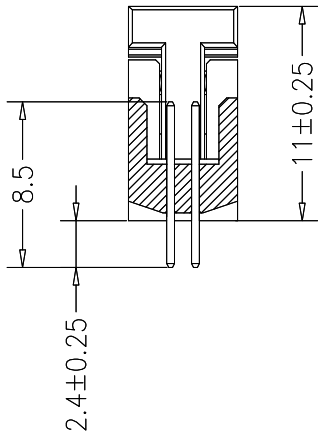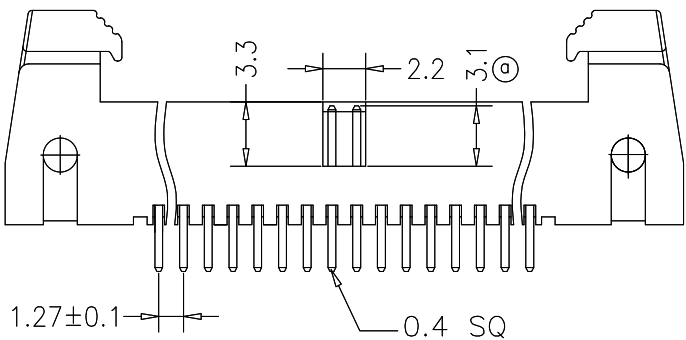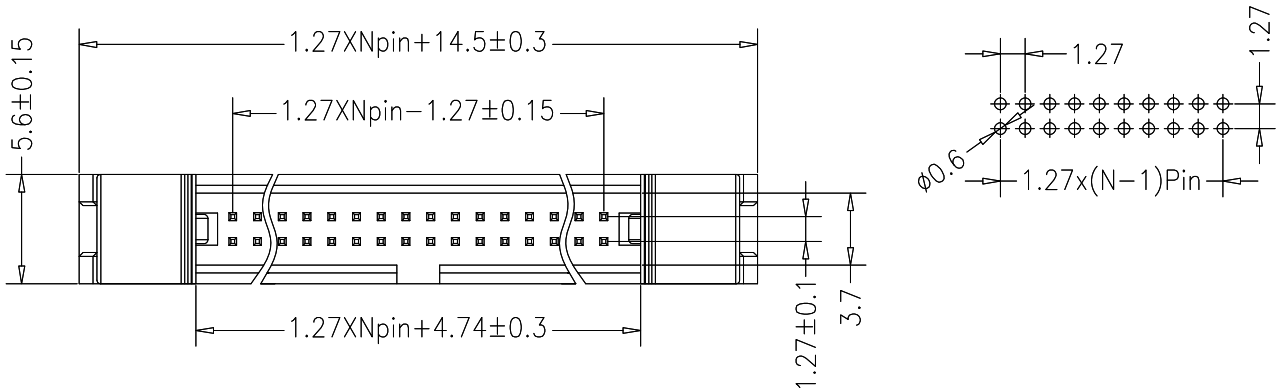

Pin	P/N	Pin	P/N
6	12120621001	36	12123621001
8	12120821001	38	12123821001
10	12121021001	40	12124021001
12	12121221001	42	12124221001
14	12121421001	44	12124421001
16	12121621001	46	12124621001
18	12121821001	48	12124821001
20	12122021001	50	12125021001
22	12122221001	52	12125221001
24	12122421001	54	12125421001
26	12122621001	56	12125621001
28	12122821001	58	12125821001
30	12123021001	60	12126021001
32	12123221001	62	12126221001
34	12123421001	64	12126421001

Dwg. No.		12D000006		IDC EjectorHeader XXPIN 1.27mm Type Male 180°	寰宇hnndo			
Projection					P/N 1212XX21001			
Unit	mm	Scale	NOT TO SCALE		P/N	1212XX21001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0