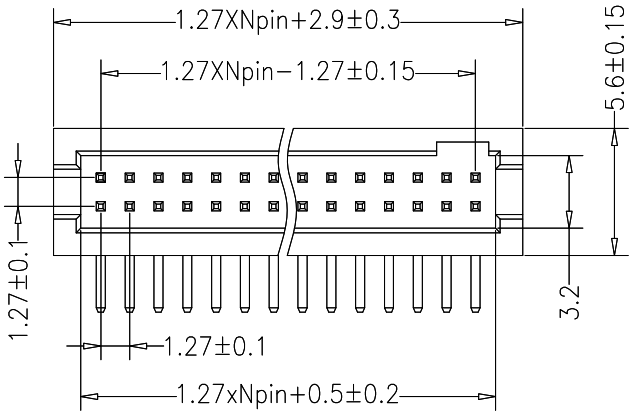

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

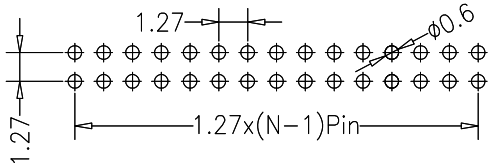

HSF RoHS
FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

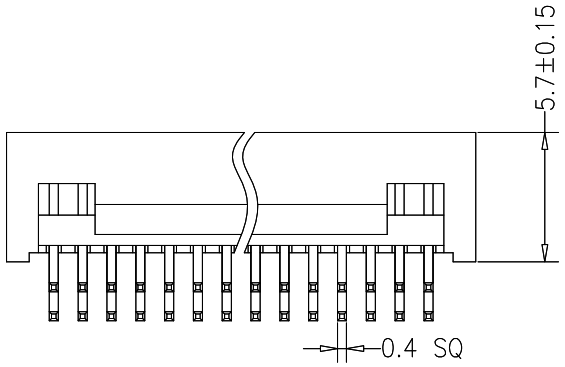

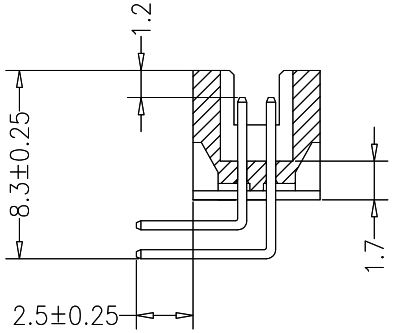

Pin	P/N	Pin	P/N
6	12110631001	36	12113631001
8	12110831001	38	12113831001
10	12111031001	40	12114031001
12	12111231001	42	12114231001
14	12111431001	44	12114431001
16	12111631001	46	12114631001
18	12111831001	48	12114831001
20	12112031001	50	12115031001
22	12112231001	52	12115231001
24	12112431001	54	12115431001
26	12112631001	56	12115631001
28	12112831001	58	12115831001
30	12113031001	60	12116031001
32	12113231001	62	12116231001
34	12113431001	64	12116431001

Dwg. No.		12D000004		IDC BoxHeader XXPIN 1.27mm Type Male 90° H5.7	寰导hnndo		
Projection					P/N	1211XX31001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver.NO 1.0
Type	IDC	Sheet	1/1				