




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

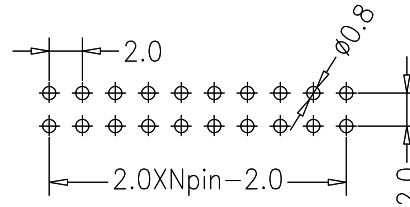

SPECIFICATIONS

Rated Current:1.50AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:800MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

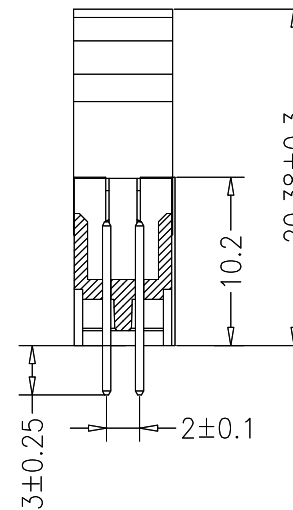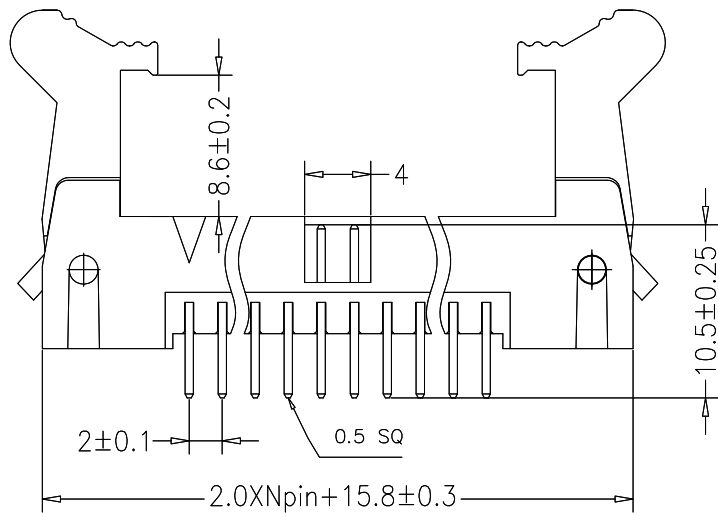

Pin	P/N	Pin	P/N
6	12120622101	36	12123622101
8	12120822101	38	12123822101
10	12121022101	40	12124022101
12	12121222101	42	12124222101
14	12121422101	44	12124422101
16	12121622101	46	12124622101
18	12121822101	48	12124822101
20	12122022101	50	12125022101
22	12122222101	52	12125222101
24	12122422101	54	12125422101
26	12122622101	56	12125622101
28	12122822101	58	12125822101
30	12123022101	60	12126022101
32	12123222101	62	12126222101
34	12123422101	64	12126422101

Dwg. No.		12D000017		IDC EjectorHeader XXPIN 2.00mm Type Male 180° Long	廣孚hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1212XX22101		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0