

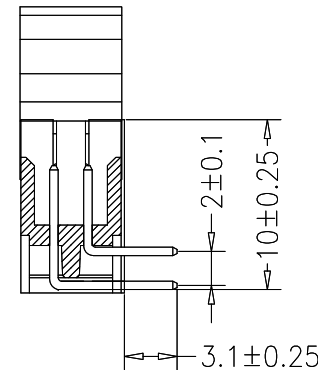
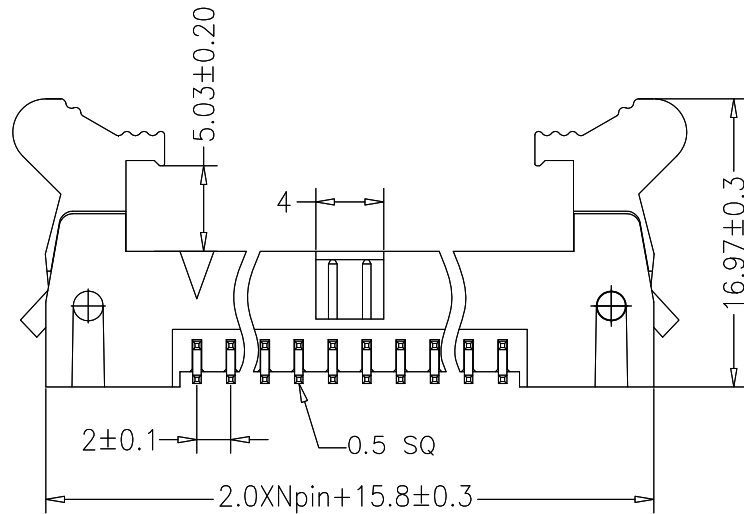


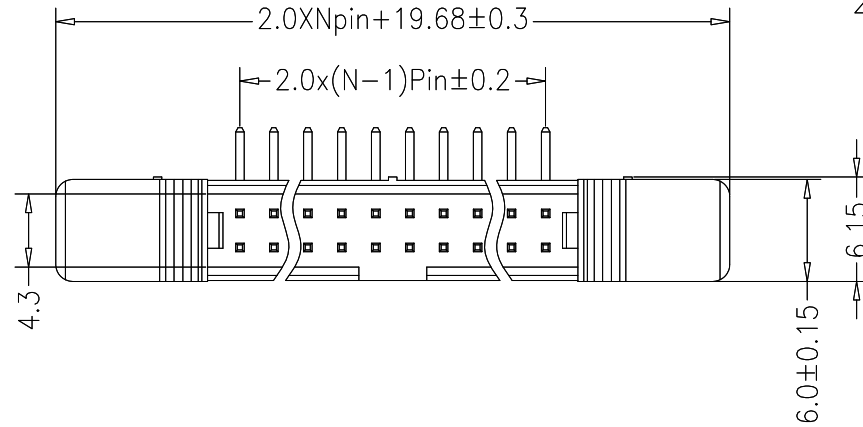

SPECIFICATIONS

Rated Current:1.50AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:800MΩ Min
Operation Temperature:-40°c to +105°c
Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

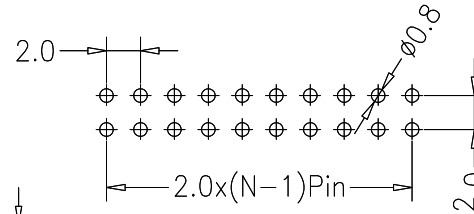

Pin	P/N	Pin	P/N
6	12120632001	36	12123632001
8	12120832001	38	12123832001
10	12121032001	40	12124032001
12	12121232001	42	12124232001
14	12121432001	44	12124432001
16	12121632001	46	12124632001
18	12121832001	48	12124832001
20	12122032001	50	12125032001
22	12122232001	52	12125232001
24	12122432001	54	12125432001
26	12122632001	56	12125632001
28	12122832001	58	12125832001
30	12123032001	60	12126032001
32	12123232001	62	12126232001
34	12123432001	64	12126432001

Dwg. No.		12D000015		IDC EjectorHeader XXPIN 2.00mm Type Male 90° Low	寰宇hnndo			
Projection					P/N 1212XX32001			
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	IDC	Sheet	1/1					