

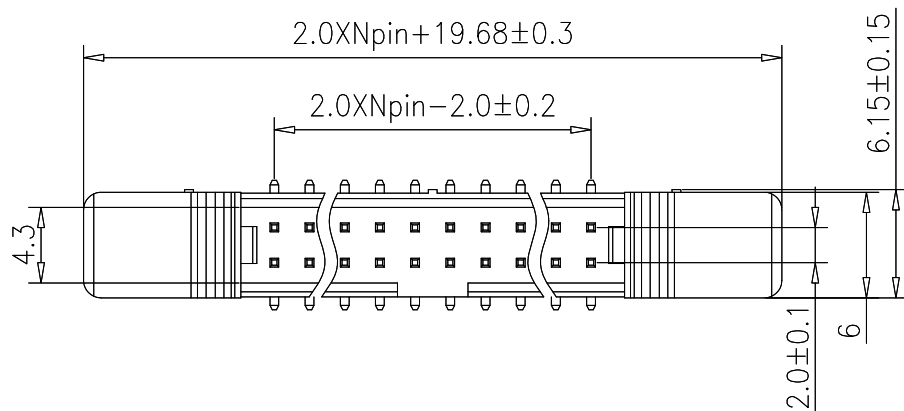
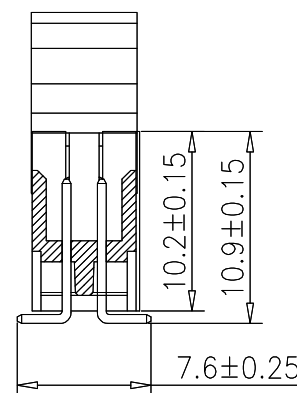


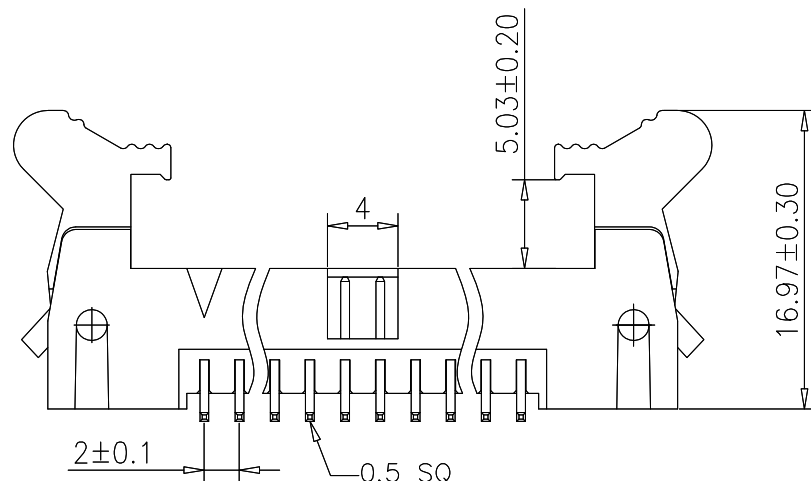

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

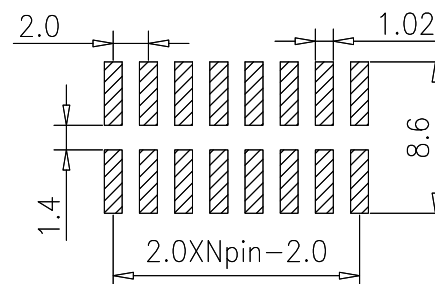

SPECIFICATIONS

Rated Current:1.50AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:800MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12120612001	36	12123612001
8	12120812001	38	12123812001
10	12121012001	40	12124012001
12	12121212001	42	12124212001
14	12121412001	44	12124412001
16	12121612001	46	12124612001
18	12121812001	48	12124812001
20	12122012001	50	12125012001
22	12122212001	52	12125212001
24	12122412001	54	12125412001
26	12122612001	56	12125612001
28	12122812001	58	12125812001
30	12123012001	60	12126012001
32	12123212001	62	12126212001
34	12123412001	64	12126412001

Dwg. No.		12D000013		IDC EjectorHeader XXPIN 2.00mm Type Male SMT Low	震导hnn do			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1212XX12001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0