




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

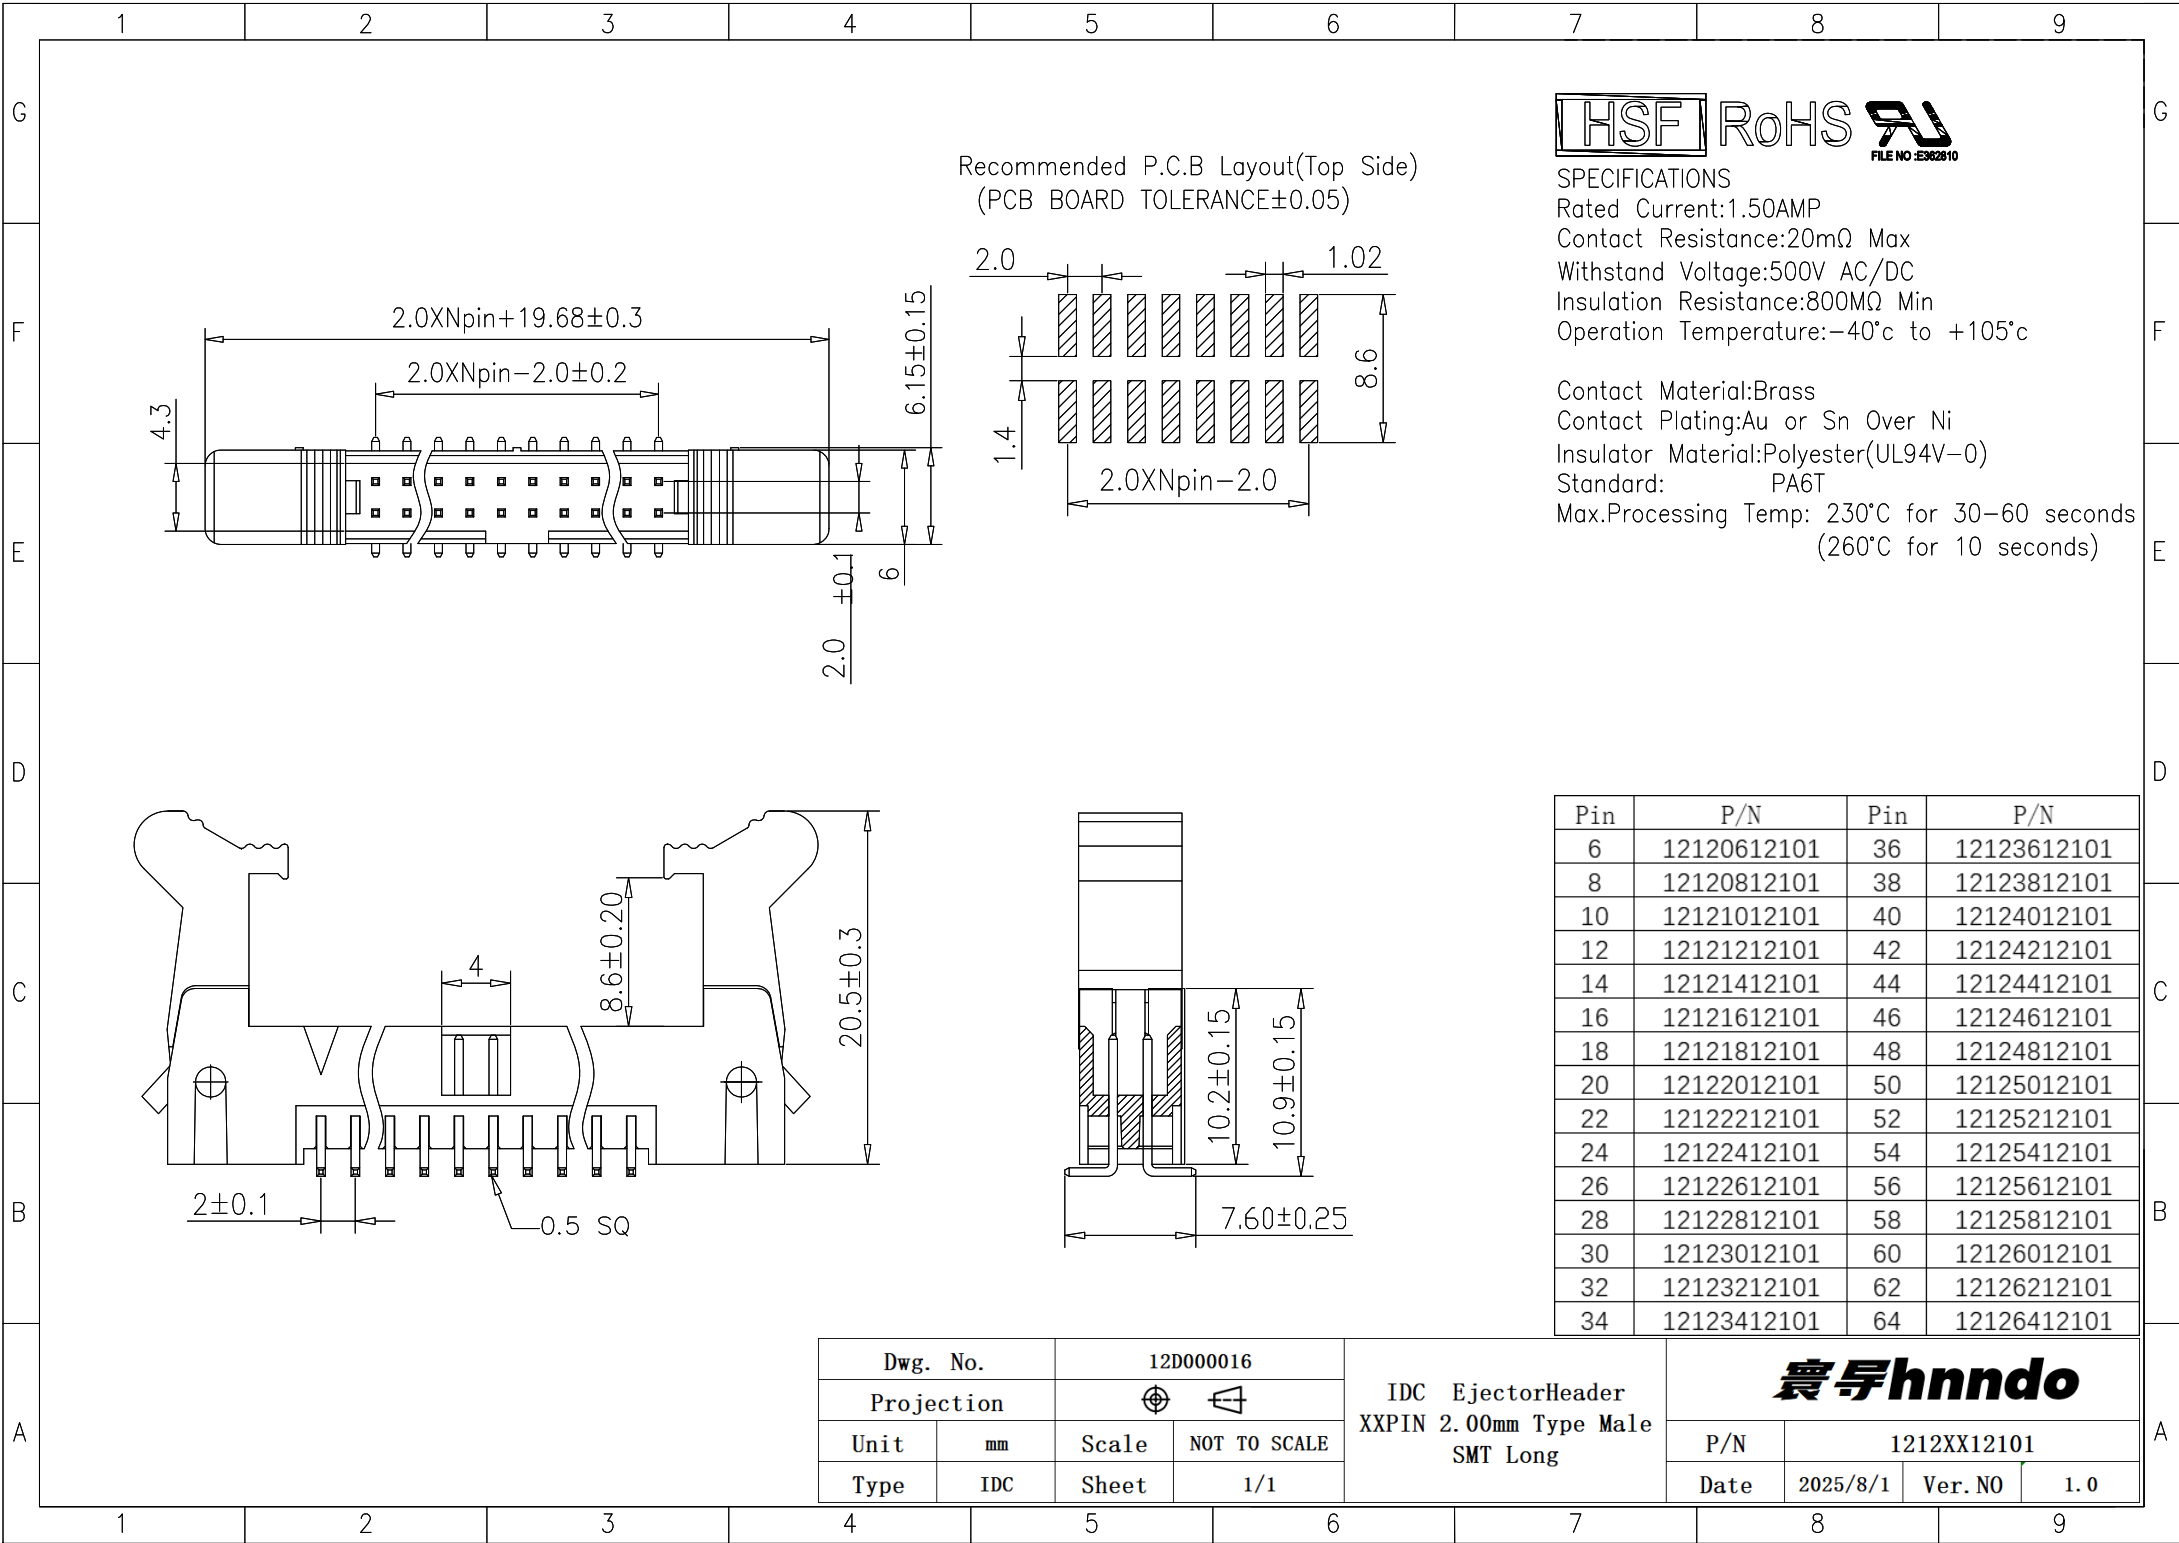

SPECIFICATIONS
Rated Current:1.50AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:800M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

Pin	P/N	Pin	P/N
6	12120612101	36	12123612101
8	12120812101	38	12123812101
10	12121012101	40	12124012101
12	12121212101	42	12124212101
14	12121412101	44	12124412101
16	12121612101	46	12124612101
18	12121812101	48	12124812101
20	12122012101	50	12125012101
22	12122212101	52	12125212101
24	12122412101	54	12125412101
26	12122612101	56	12125612101
28	12122812101	58	12125812101
30	12123012101	60	12126012101
32	12123212101	62	12126212101
34	12123412101	64	12126412101

Dwg. No.		12D000016		IDC EjectorHeader XXPIN 2.00mm Type Male SMT Long	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1212XX12101		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0