





8P~64P



SINGLE CONTACT TYPE

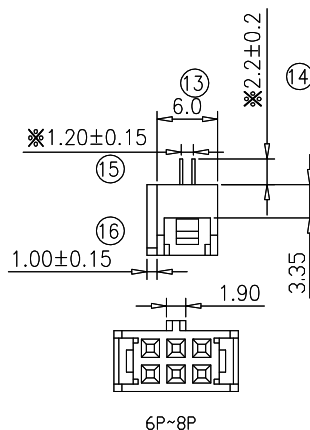

6P~8P



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12140643001	36	12143643001
8	12140843001	38	12143843001
10	12141043001	40	12144043001
12	12141243001	42	12144243001
14	12141443001	44	12144443001
16	12141643001	46	12144643001
18	12141843001	48	12144843001
20	12142043001	50	12145043001
22	12142243001	52	12145243001
24	12142443001	54	12145443001
26	12142643001	56	12145643001
28	12142843001	58	12145843001
30	12143043001	60	12146043001
32	12143243001	62	12146243001
34	12143443001	64	12146443001

Dwg. No.		12D000019		IDC FC Butterfly XXPIN 2.54mm Type Female Press	震孚hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1214XX43001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0