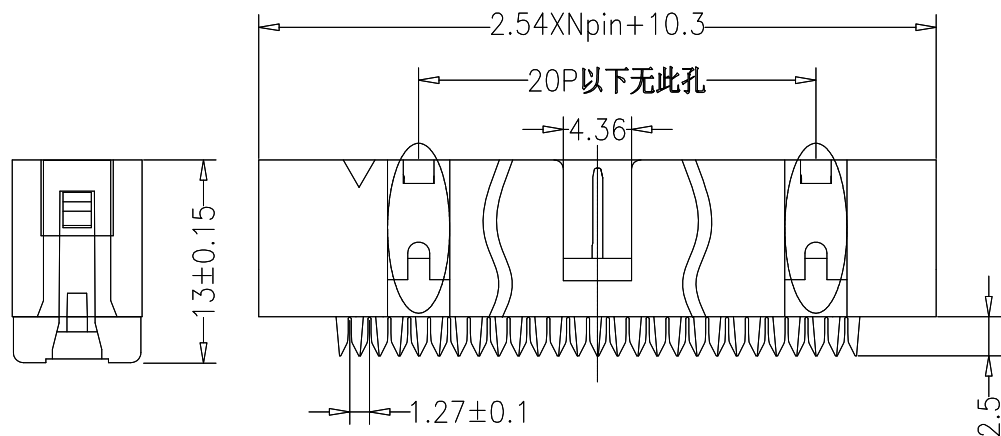
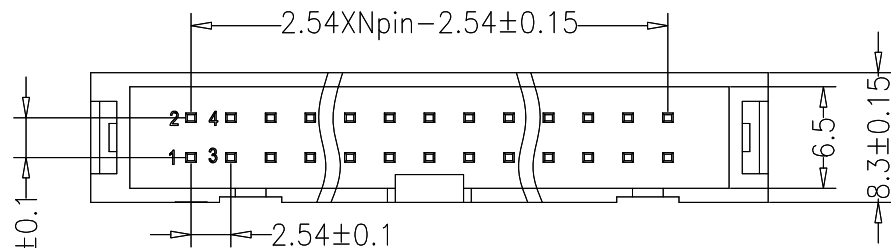


HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

6	12160643001	36	12163643001
8	12160843001	38	12163843001
10	12161043001	40	12164043001
12	12161243001	42	12164243001
14	12161443001	44	12164443001
16	12161643001	46	12164643001
18	12161843001	48	12164843001
20	12162043001	50	12165043001
22	12162243001	52	12165243001
24	12162443001	54	12165443001
26	12162643001	56	12165643001
28	12162843001	58	12165843001
30	12163043001	60	12166043001
32	12163243001	62	12166243001
34	12163443001	64	12166443001

Dwg. No.		12D000027		IDC BoxHeader XXPIN 2.54mm Type Male Press	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1216XX43001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0