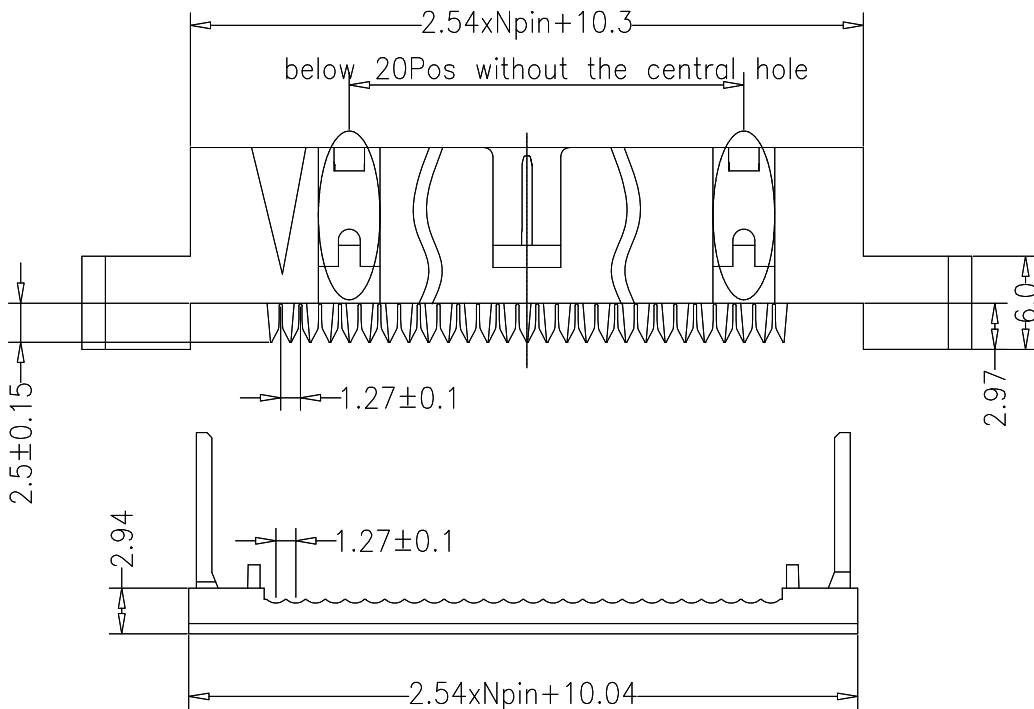
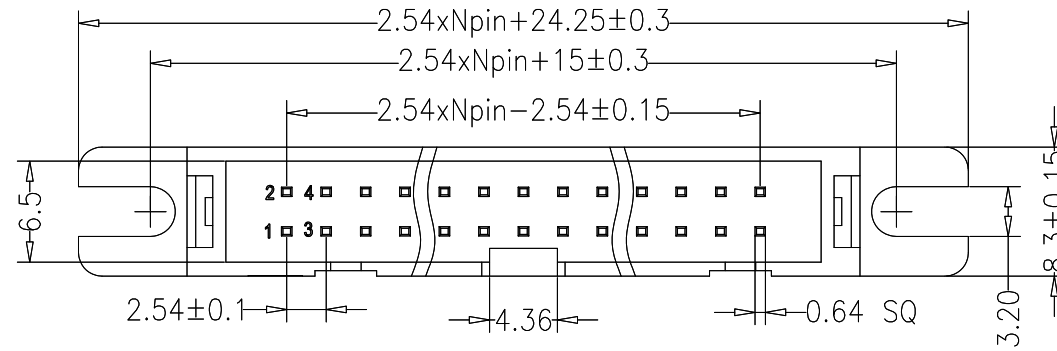


SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12160643101	36	12163643101
8	12160843101	38	12163843101
10	12161043101	40	12164043101
12	12161243101	42	12164243101
14	12161443101	44	12164443101
16	12161643101	46	12164643101
18	12161843101	48	12164843101
20	12162043101	50	12165043101
22	12162243101	52	12165243101
24	12162443101	54	12165443101
26	12162643101	56	12165643101
28	12162843101	58	12165843101
30	12163043101	60	12166043101
32	12163243101	62	12166243101
34	12163443101	64	12166443101

Dwg. No.		12D000028		IDC BoxHeader XXPIN 2.54mm Type Male Press WithLocation hole	寰宇hnnndo			
Projection					P/N		1216XX43101	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	IDC	Sheet	1/1					