



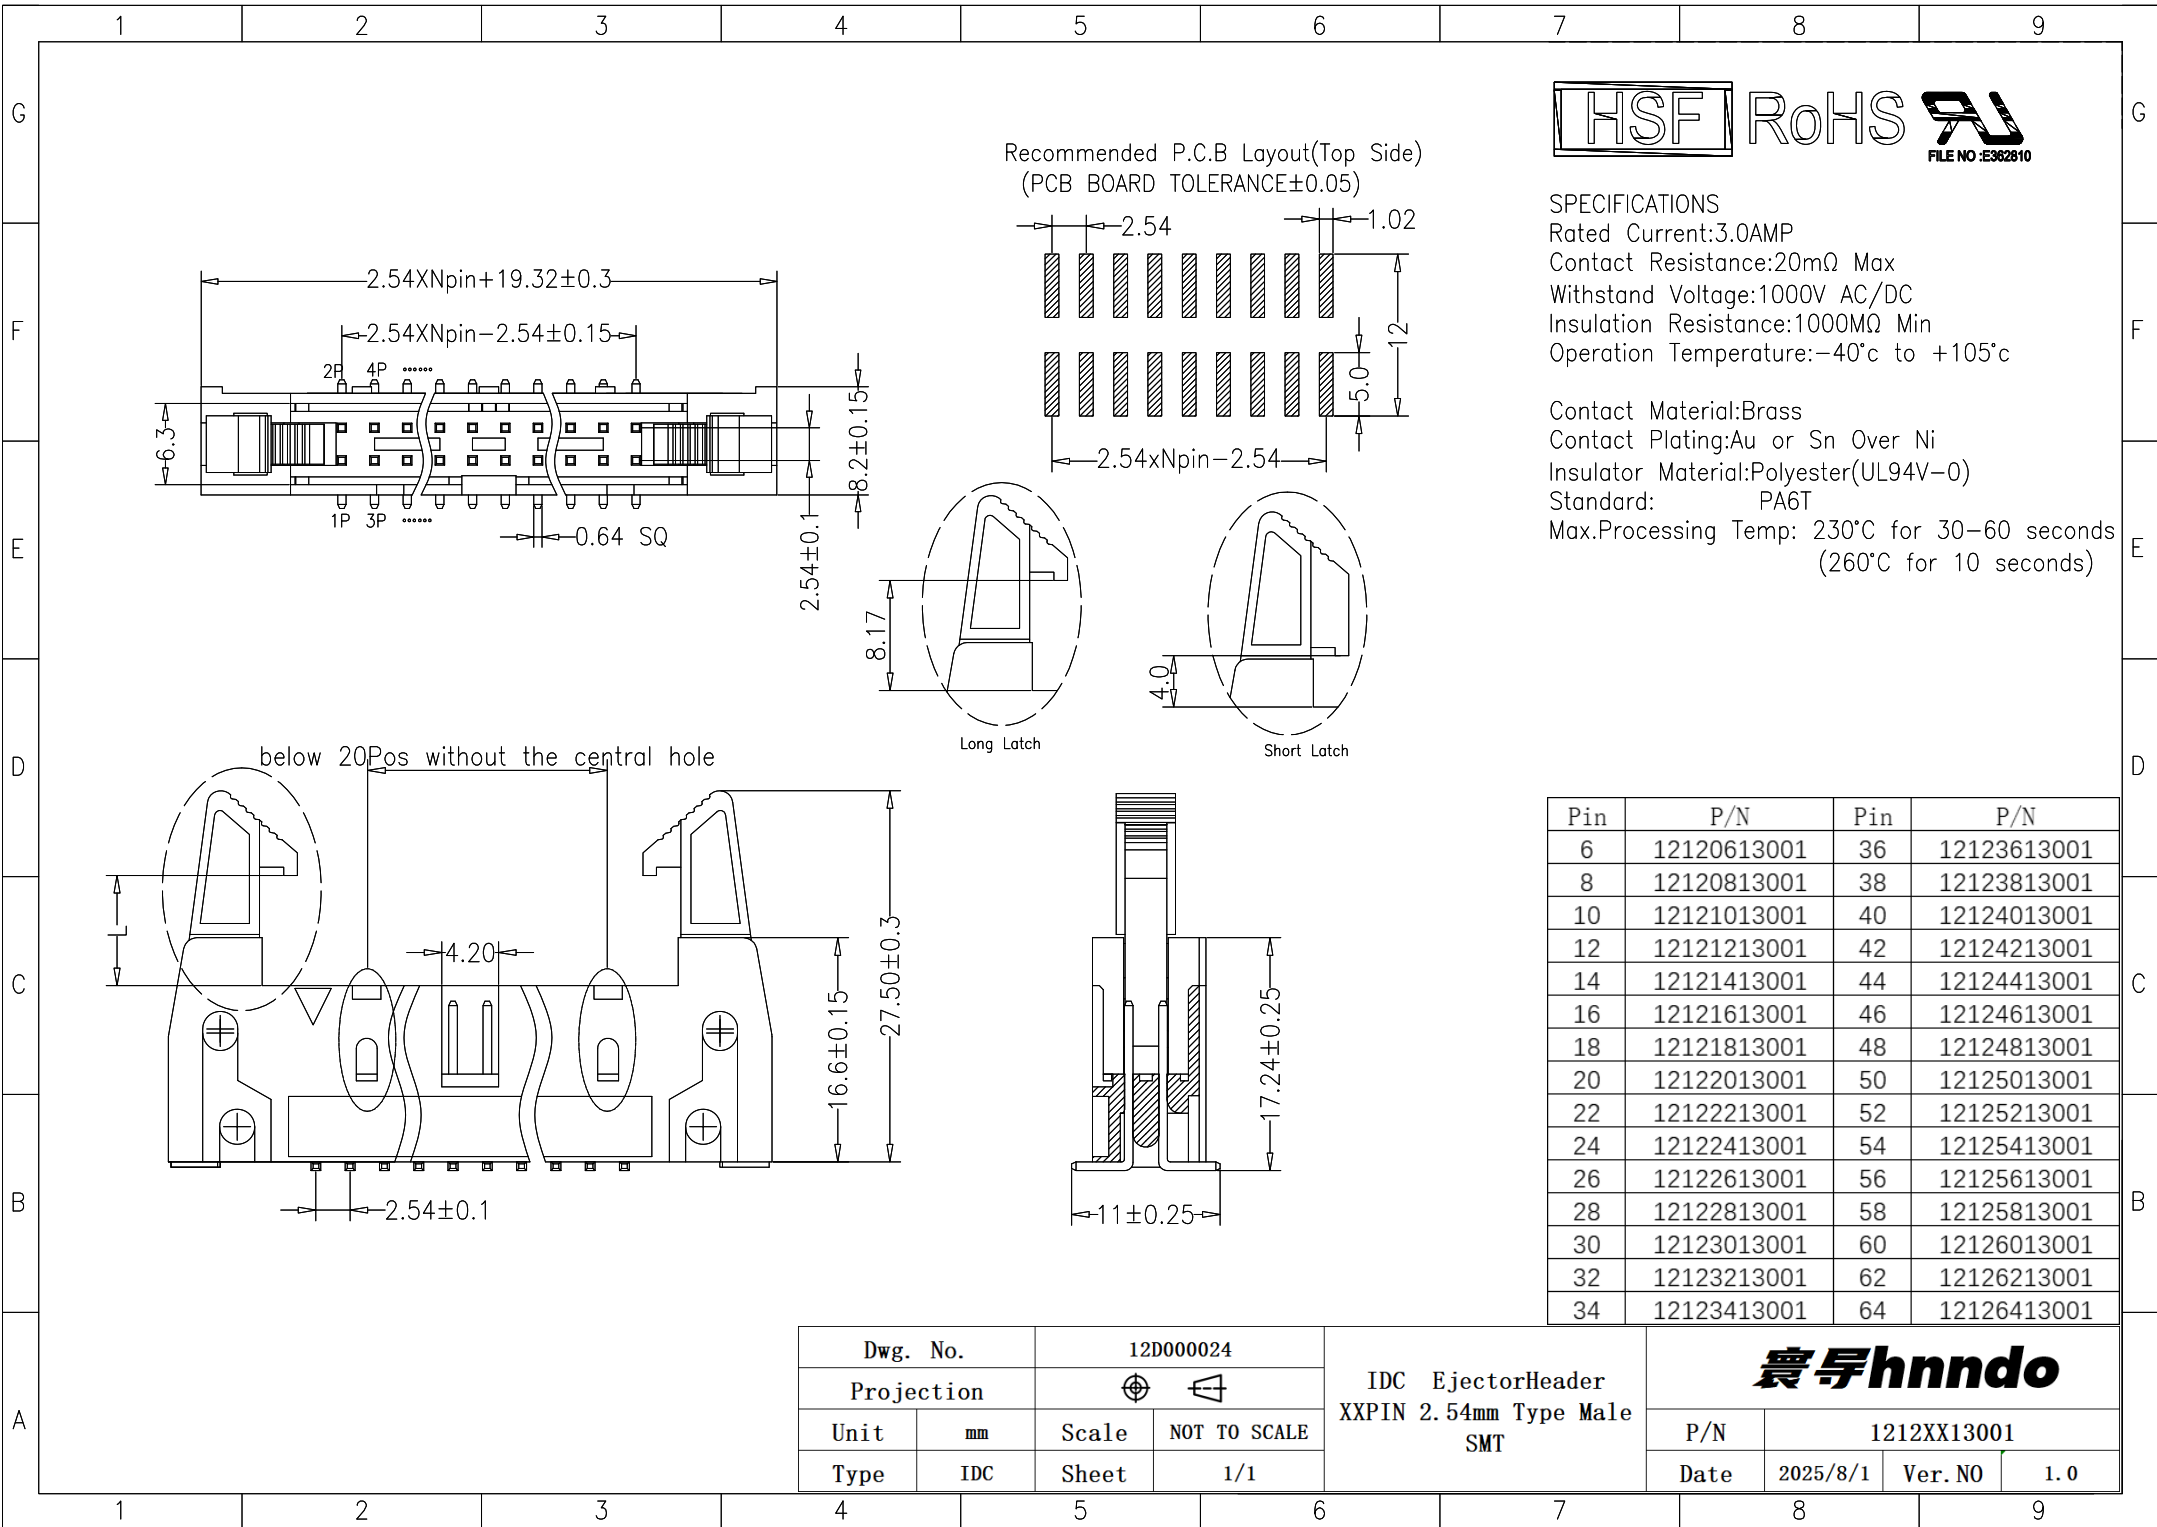

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

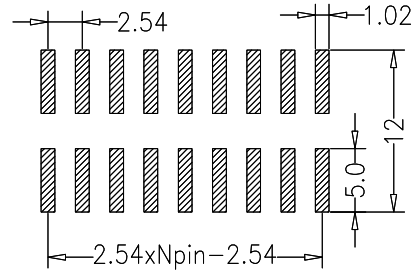

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

Pin	P/N	Pin	P/N
6	12120613001	36	12123613001
8	12120813001	38	12123813001
10	12121013001	40	12124013001
12	12121213001	42	12124213001
14	12121413001	44	12124413001
16	12121613001	46	12124613001
18	12121813001	48	12124813001
20	12122013001	50	12125013001
22	12122213001	52	12125213001
24	12122413001	54	12125413001
26	12122613001	56	12125613001
28	12122813001	58	12125813001
30	12123013001	60	12126013001
32	12123213001	62	12126213001
34	12123413001	64	12126413001

Dwg. No.		12D000024		IDC EjectorHeader XXPIN 2.54mm Type Male SMT	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1212XX13001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0