


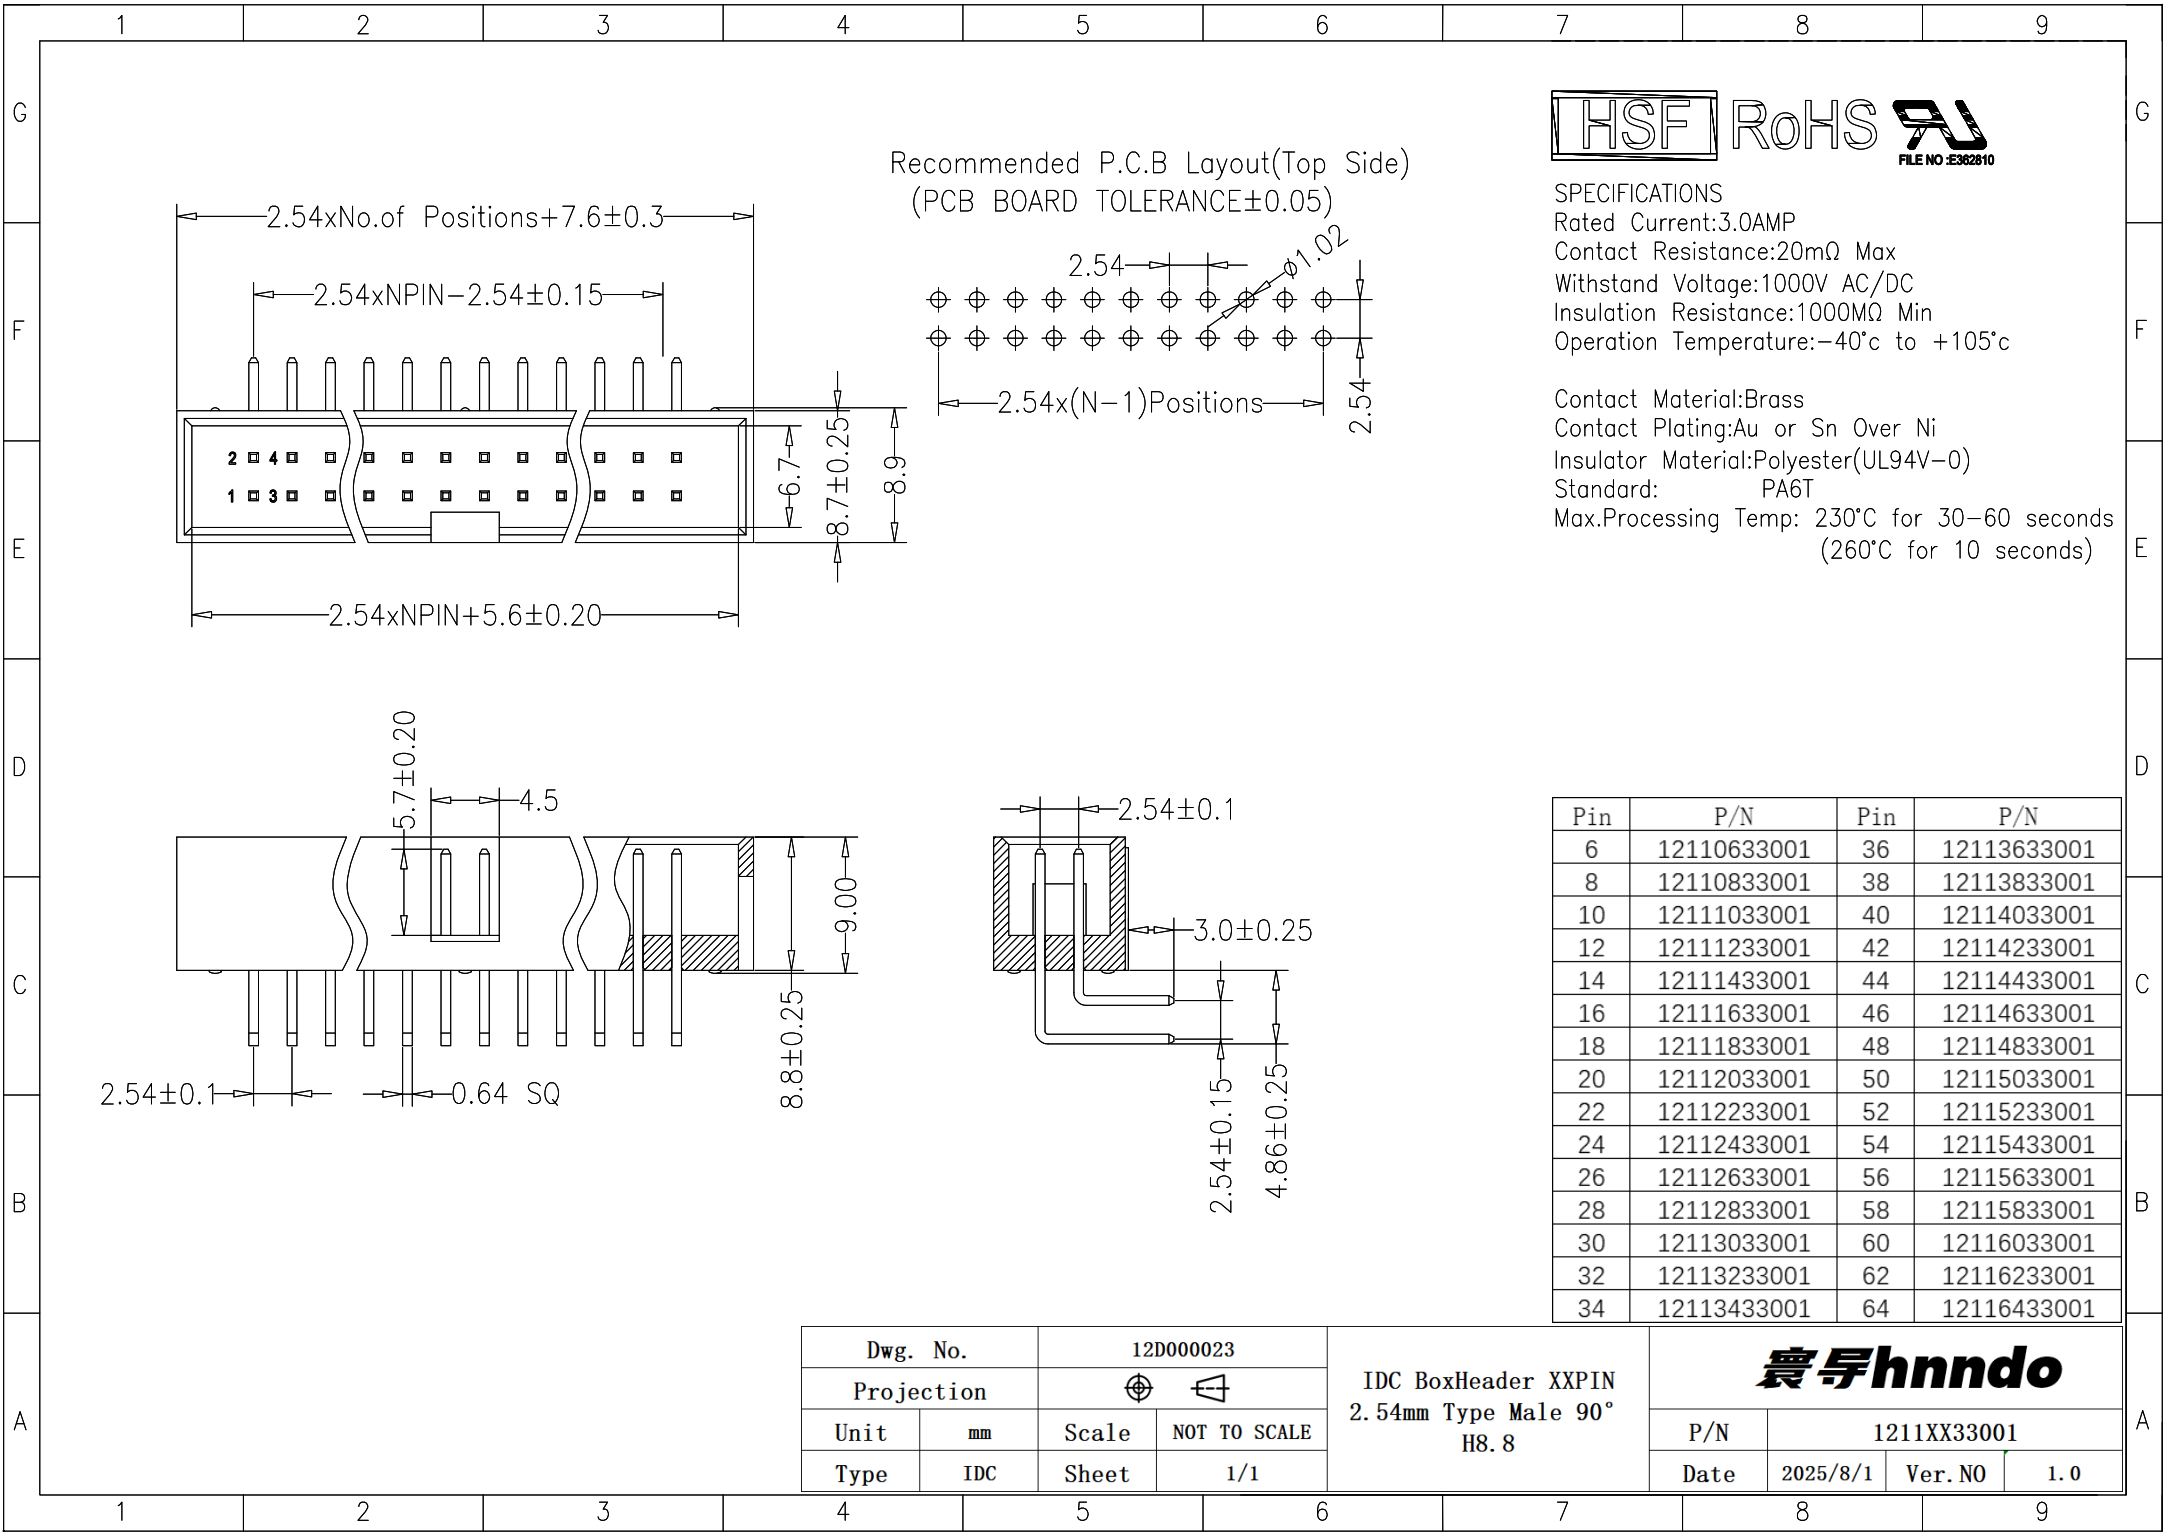

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12110633001	36	12113633001
8	12110833001	38	12113833001
10	12111033001	40	12114033001
12	12111233001	42	12114233001
14	12111433001	44	12114433001
16	12111633001	46	12114633001
18	12111833001	48	12114833001
20	12112033001	50	12115033001
22	12112233001	52	12115233001
24	12112433001	54	12115433001
26	12112633001	56	12115633001
28	12112833001	58	12115833001
30	12113033001	60	12116033001
32	12113233001	62	12116233001
34	12113433001	64	12116433001

Dwg. No.		12D000023		IDC BoxHeader XXPIN 2.54mm Type Male 90° H8.8	寰宇hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1211XX33001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0