



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni


Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12110623001	36	12113623001
8	12110823001	38	12113823001
10	12111023001	40	12114023001
12	12111223001	42	12114223001
14	12111423001	44	12114423001
16	12111623001	46	12114623001
18	12111823001	48	12114823001
20	12112023001	50	12115023001
22	12112223001	52	12115223001
24	12112423001	54	12115423001
26	12112623001	56	12115623001
28	12112823001	58	12115823001
30	12113023001	60	12116023001
32	12113223001	62	12116223001
34	12113423001	64	12116423001

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

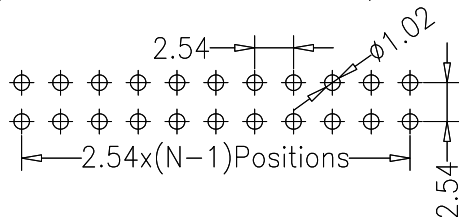

Dwg. No.		12D000022		IDC BoxHeader XXPIN 2.54mm Type Male 180° H8.8				
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1211XX23001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0