


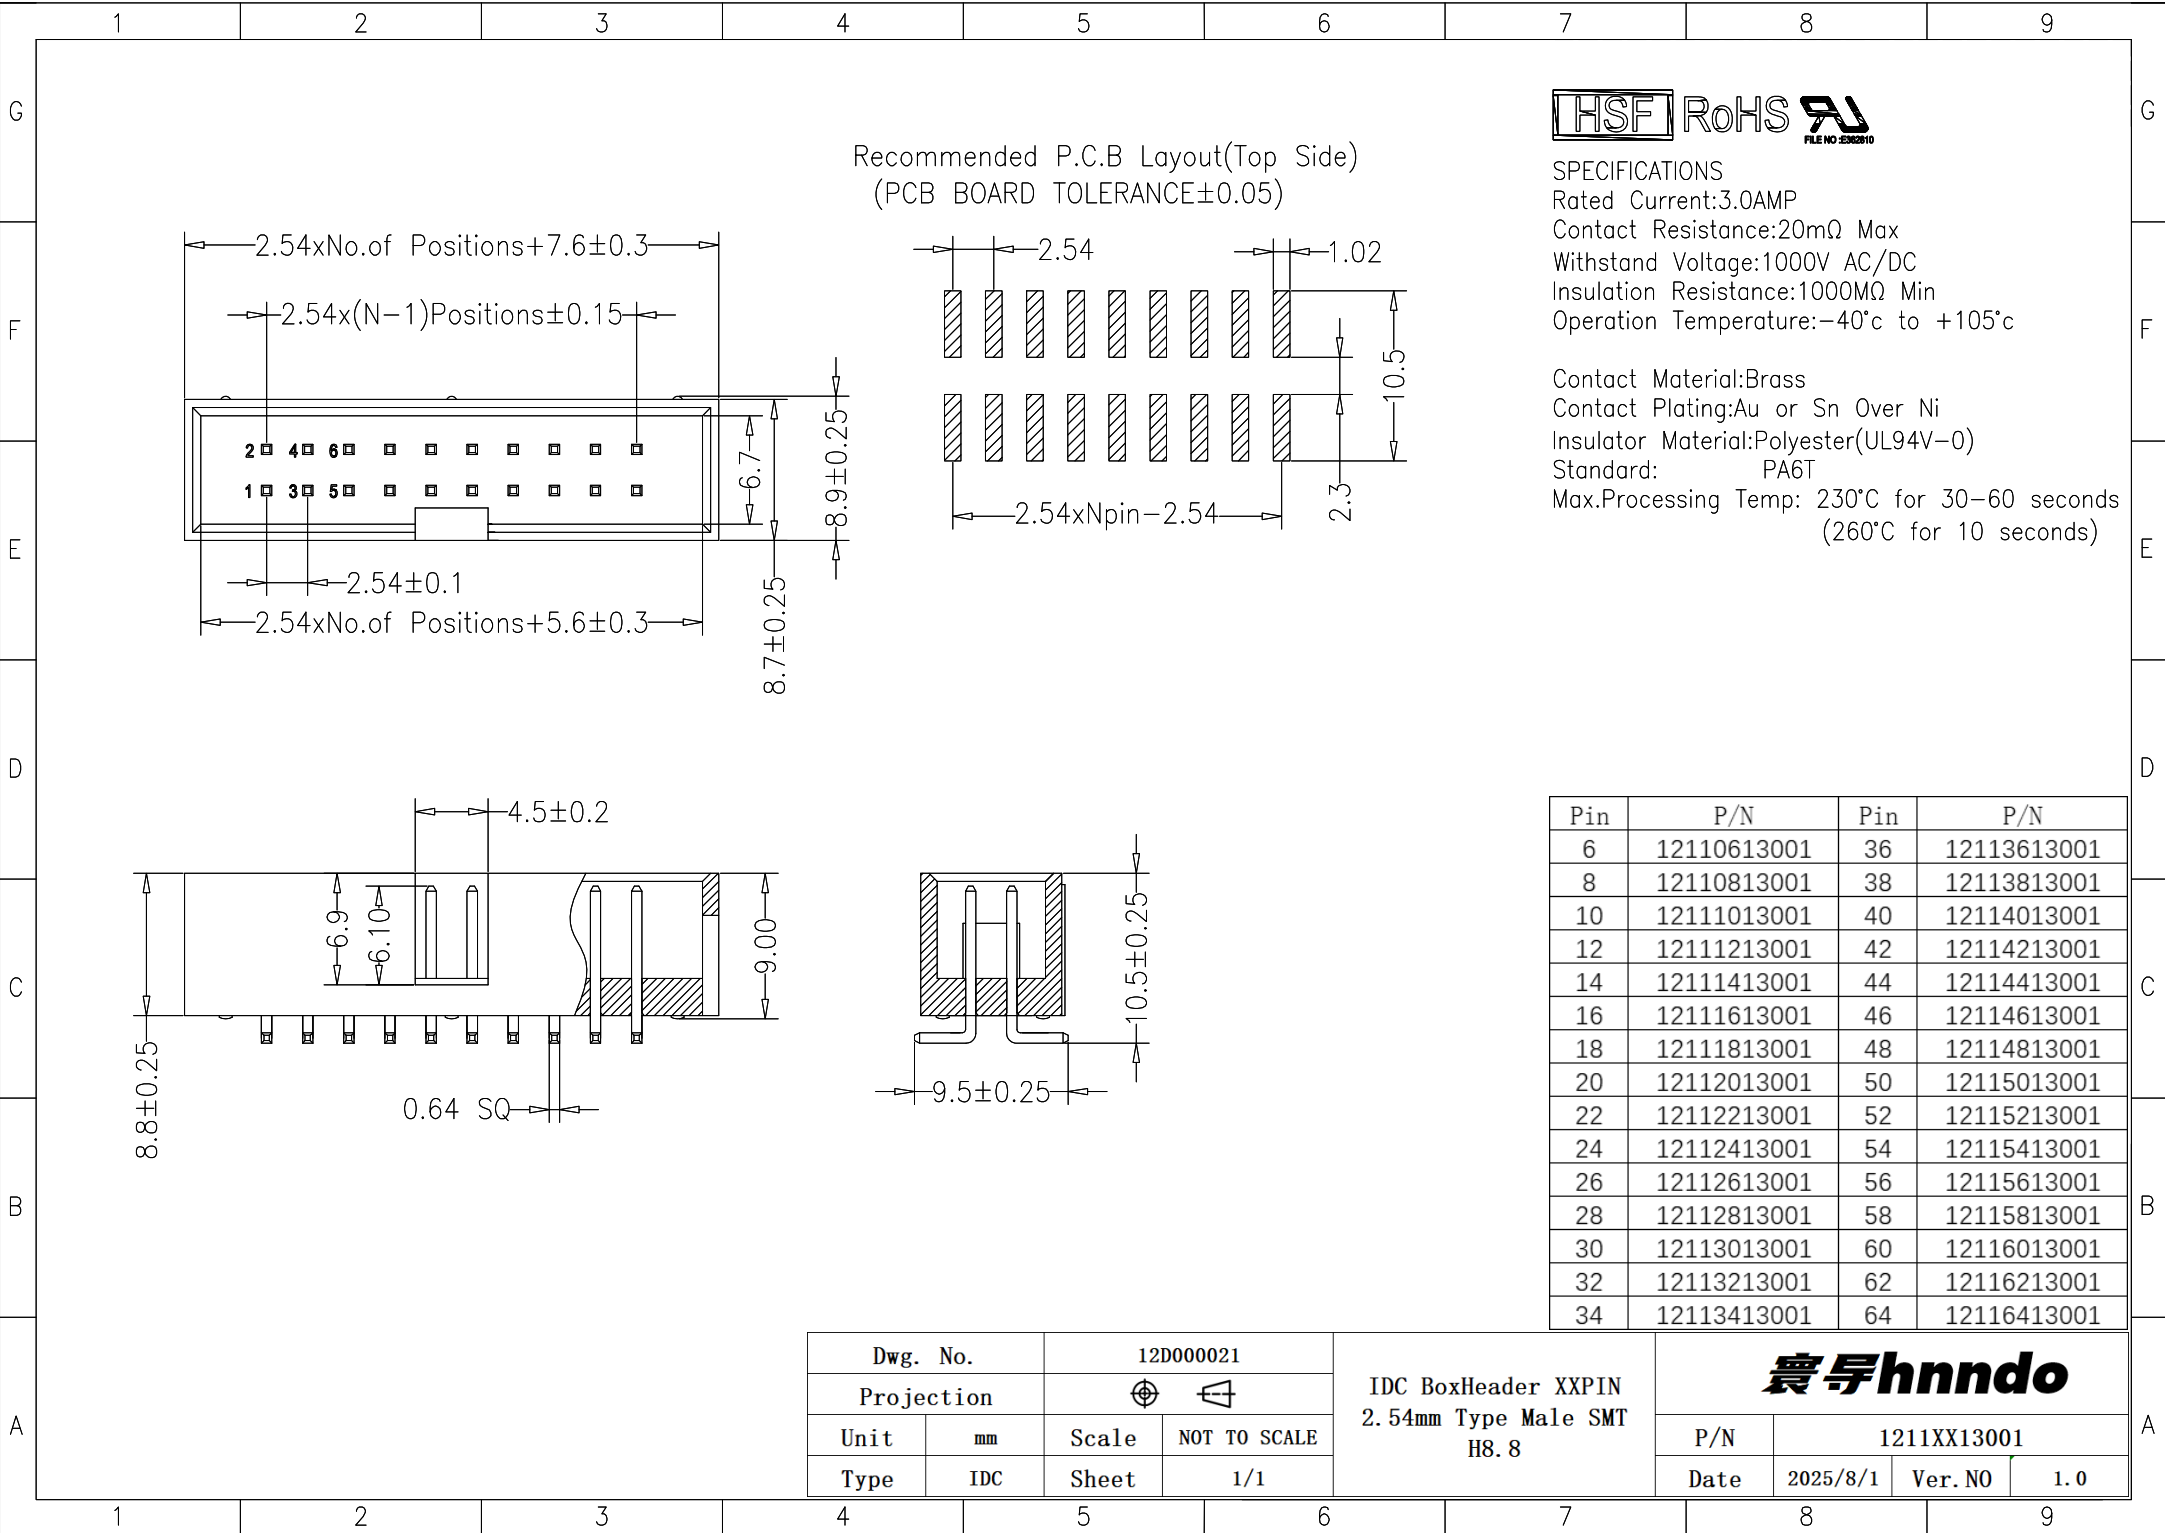

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Pin	P/N	Pin	P/N
6	12110613001	36	12113613001
8	12110813001	38	12113813001
10	12111013001	40	12114013001
12	12111213001	42	12114213001
14	12111413001	44	12114413001
16	12111613001	46	12114613001
18	12111813001	48	12114813001
20	12112013001	50	12115013001
22	12112213001	52	12115213001
24	12112413001	54	12115413001
26	12112613001	56	12115613001
28	12112813001	58	12115813001
30	12113013001	60	12116013001
32	12113213001	62	12116213001
34	12113413001	64	12116413001

Dwg. No.		12D000021		IDC BoxHeader XXPIN 2.54mm Type Male SMT H8.8				
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1211XX13001		
Type	IDC	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0