
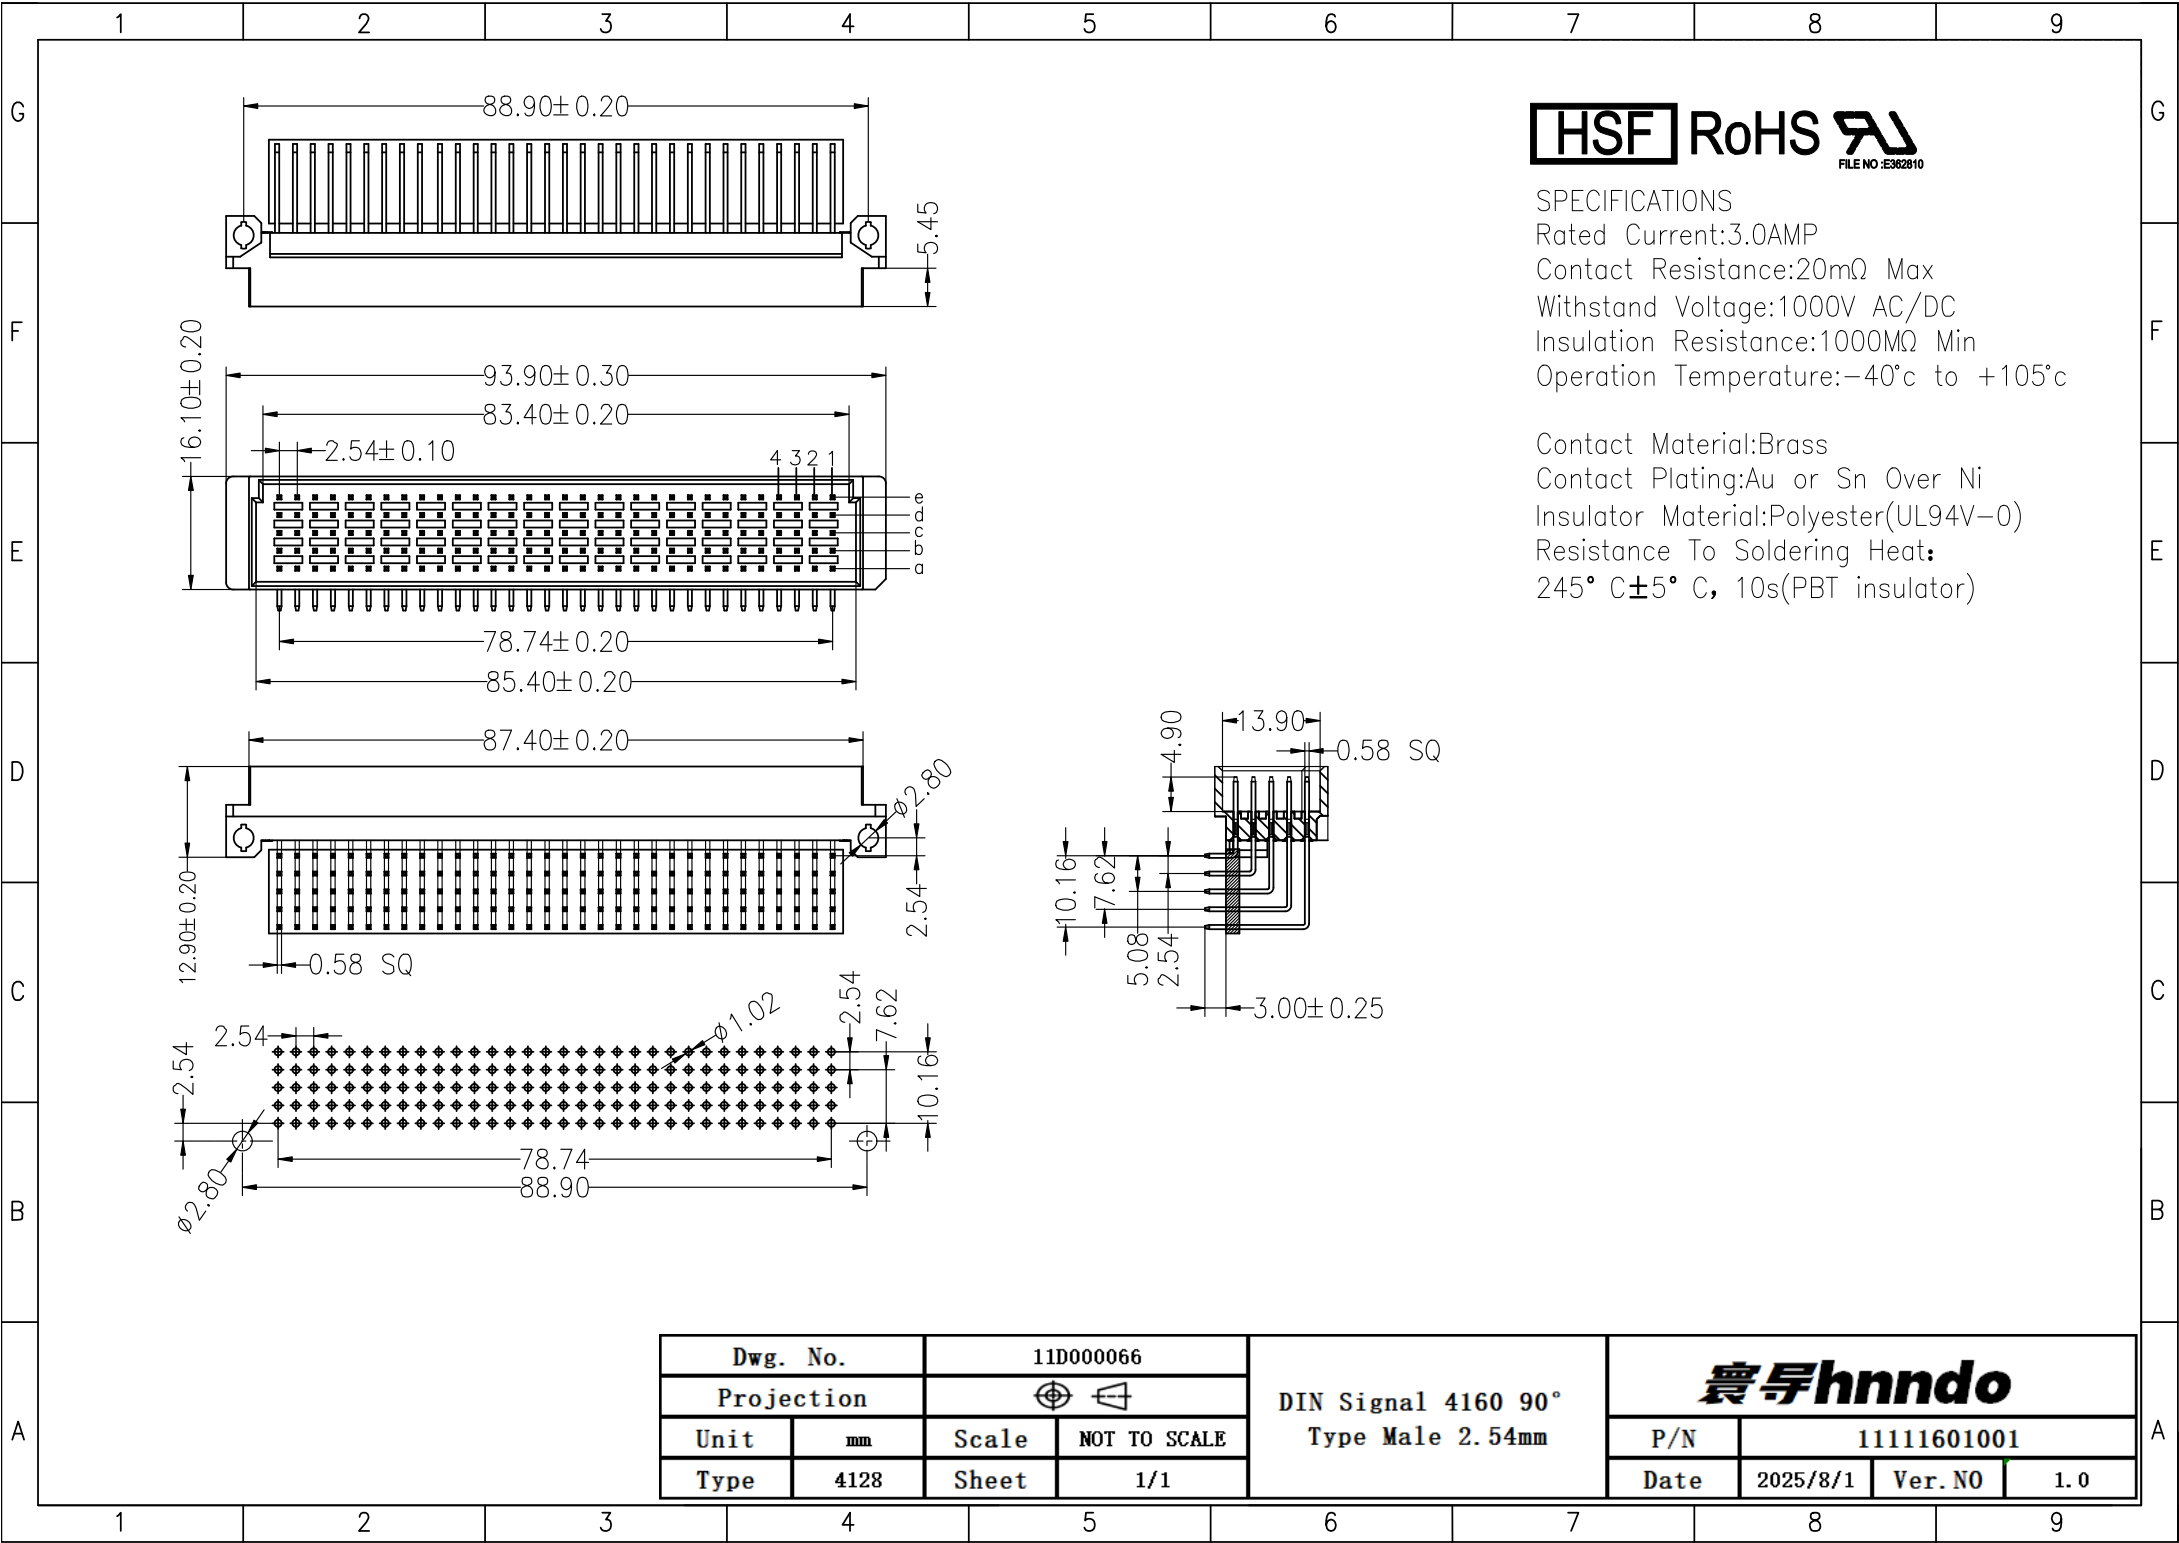




SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
245° C±5° C, 10s(PBT insulator)

Dwg. No.		11D000066		DIN Signal 4160 90° Type Male 2.54mm				
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	11111601001		
Type	4128	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0