


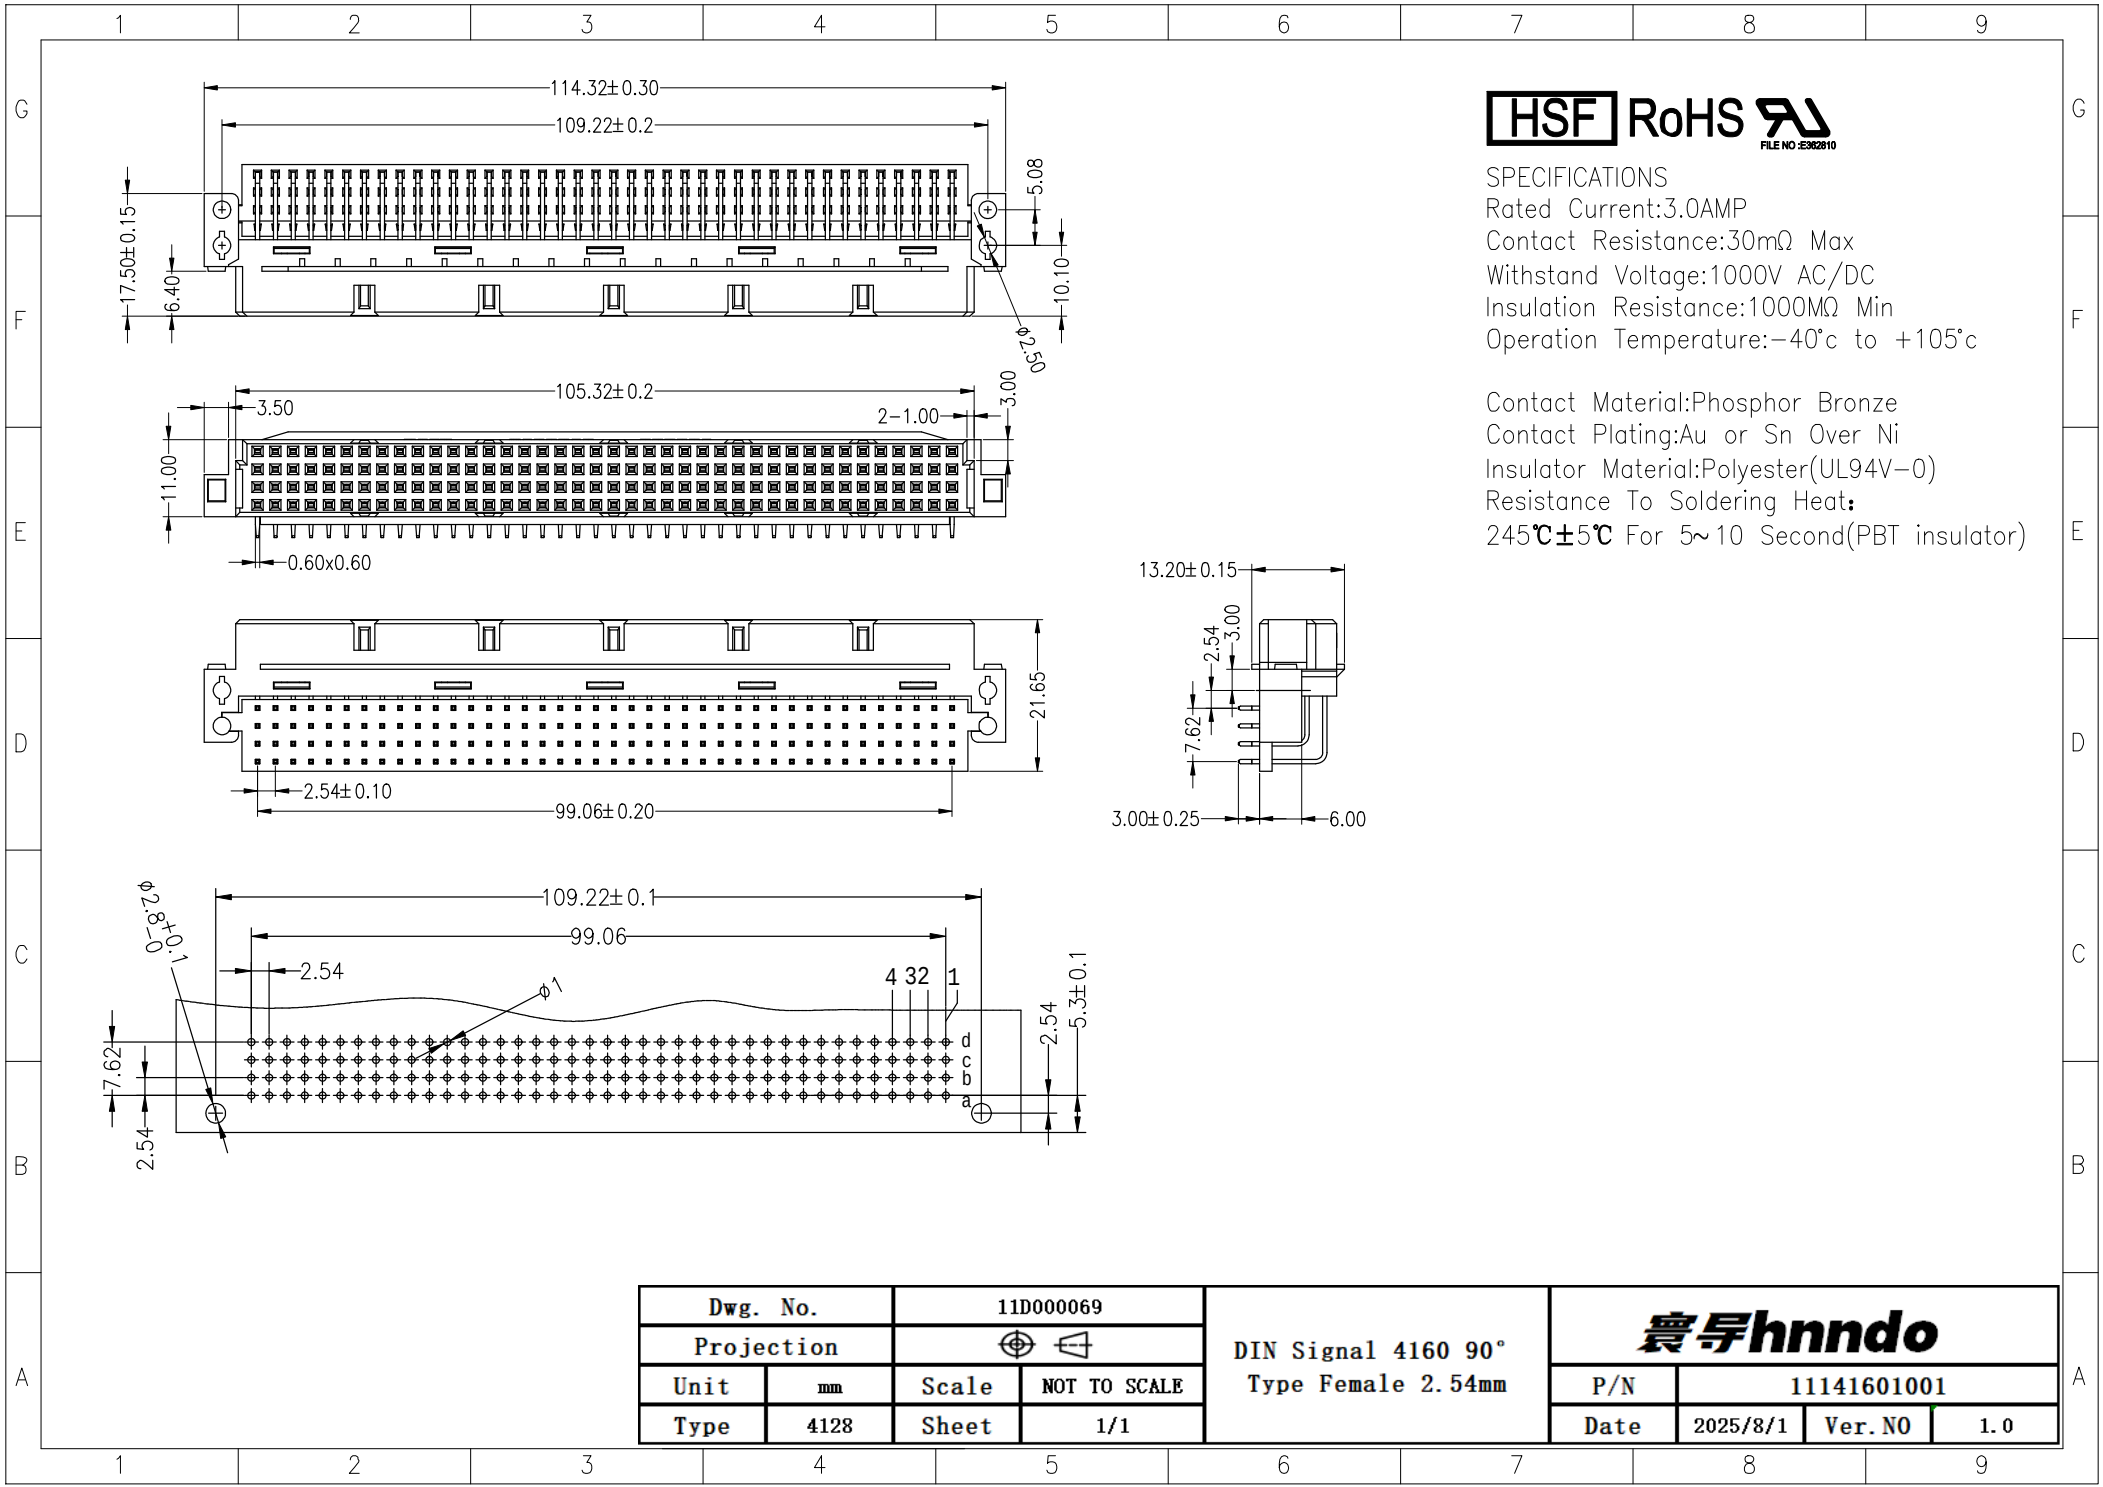

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Resistance To Soldering Heat:
245℃±5℃ For 5~10 Second(PBT insulator)

Dwg. No.		11D000069		DIN Signal 4160 90° Type Female 2.54mm	寰宇hnndo			
Projection					P/N		11141601001	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	4128	Sheet	1/1					