



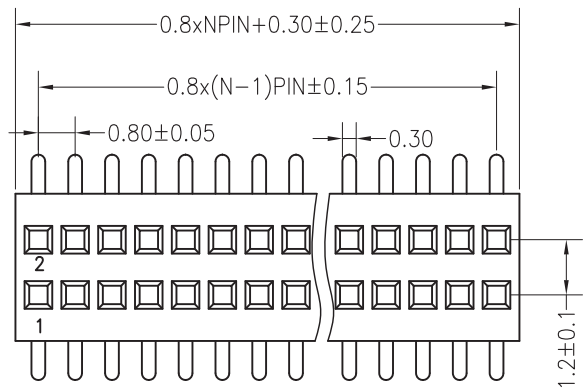

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

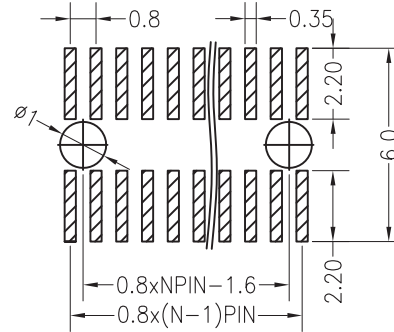

SPECIFICATIONS

Rated Current:0.75AMP

Contact Resistance:30mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C



Contact Material:Phosphor Bronze

Contact Plating: Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

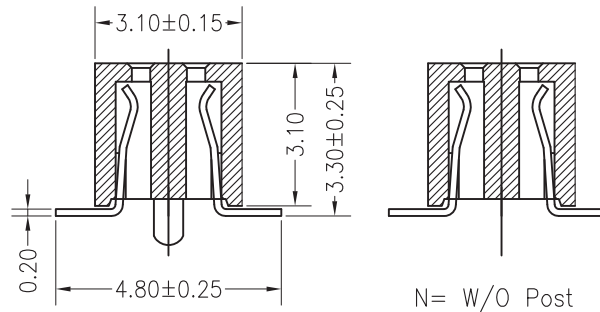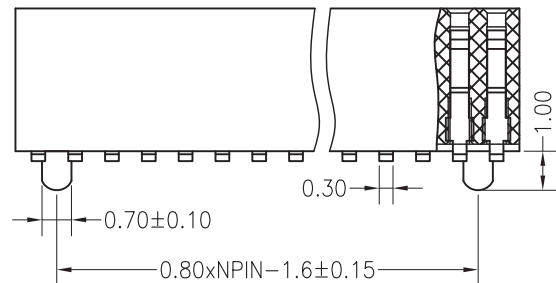

W= With Post

|            |    |                                                                                       |              |                             |                            |          |             |     |
|------------|----|---------------------------------------------------------------------------------------|--------------|-----------------------------|----------------------------|----------|-------------|-----|
| Dwg. No.   |    | 14D000001                                                                             |              | 0.8mmPF 2xNPin H3.10<br>SMT | <div>寰宇 <i>hnndo</i></div> |          |             |     |
| Projection |    |  |              |                             | P/N                        |          | 1421XX11001 |     |
| Unit       | mm | Scale                                                                                 | NOT TO SCALE |                             | Date                       | 2025/8/1 | Ver. NO     | 1.0 |
| Type       | PF | Sheet                                                                                 | 1/1          |                             |                            |          |             |     |