


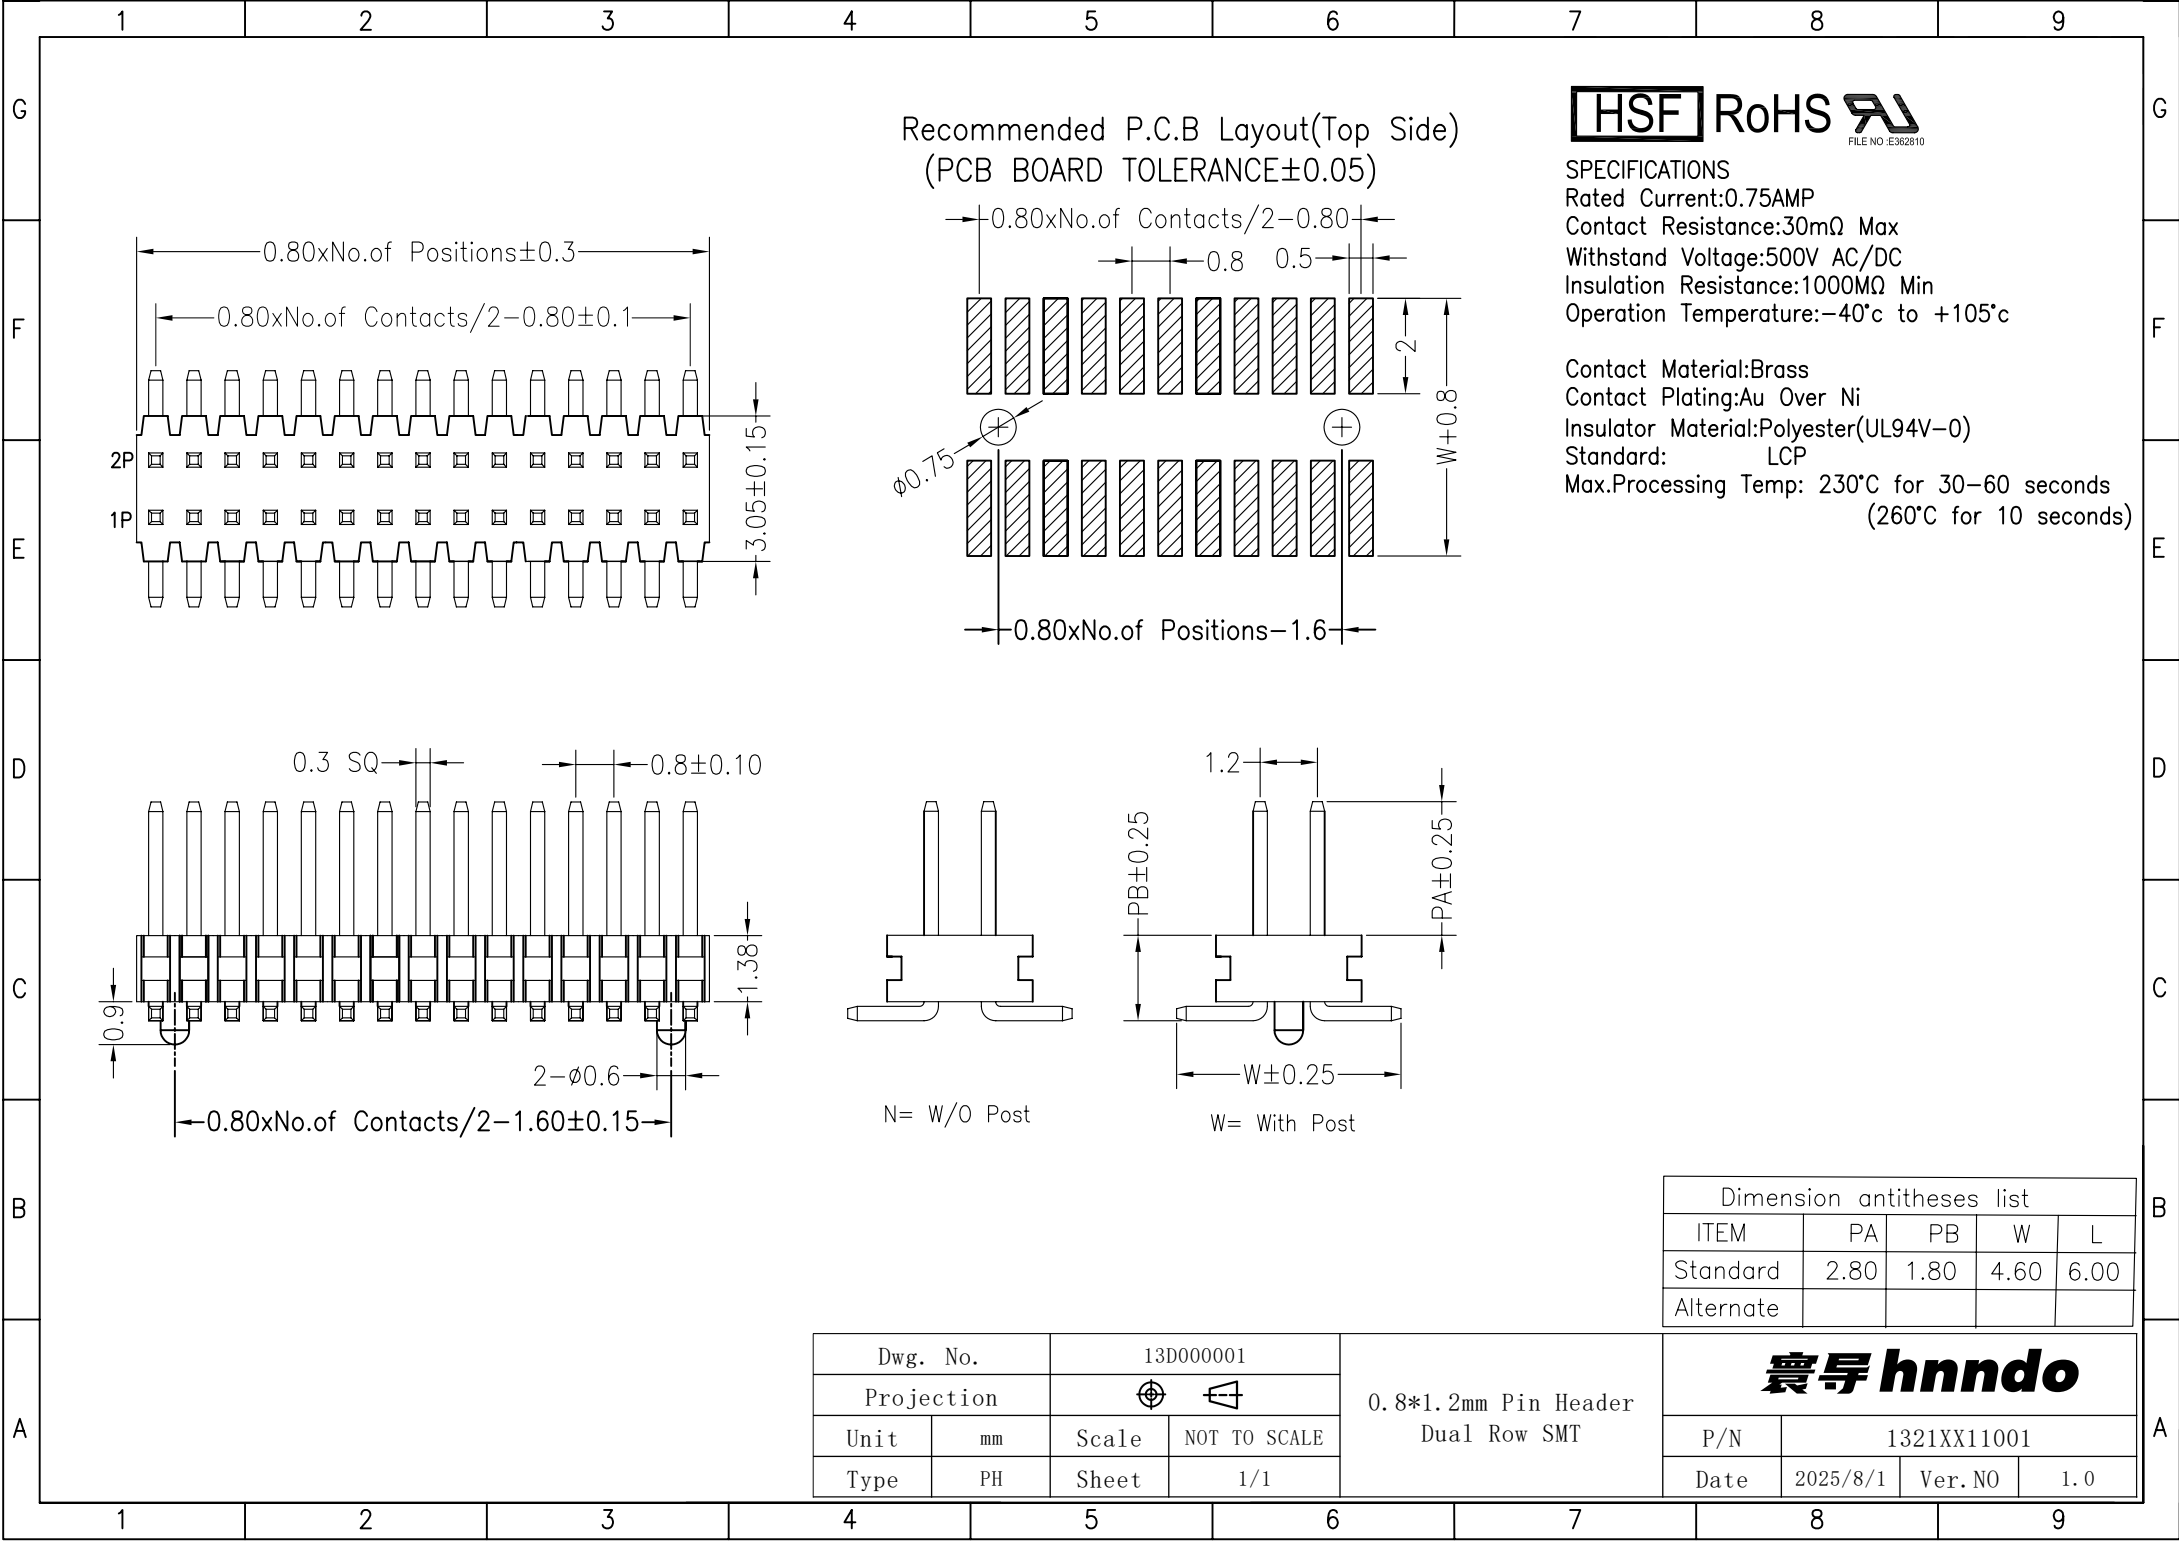

SPECIFICATIONS
Rated Current:0.75AMP
Contact Resistance:30mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: LCP
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	2.80	1.80	4.60	6.00
Alternate				

Dwg. No.		13D000001		0.8*1.2mm Pin Header Dual Row SMT	寰宇 <i>hnndo</i>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1321XX11001		
Type	PH	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0