




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

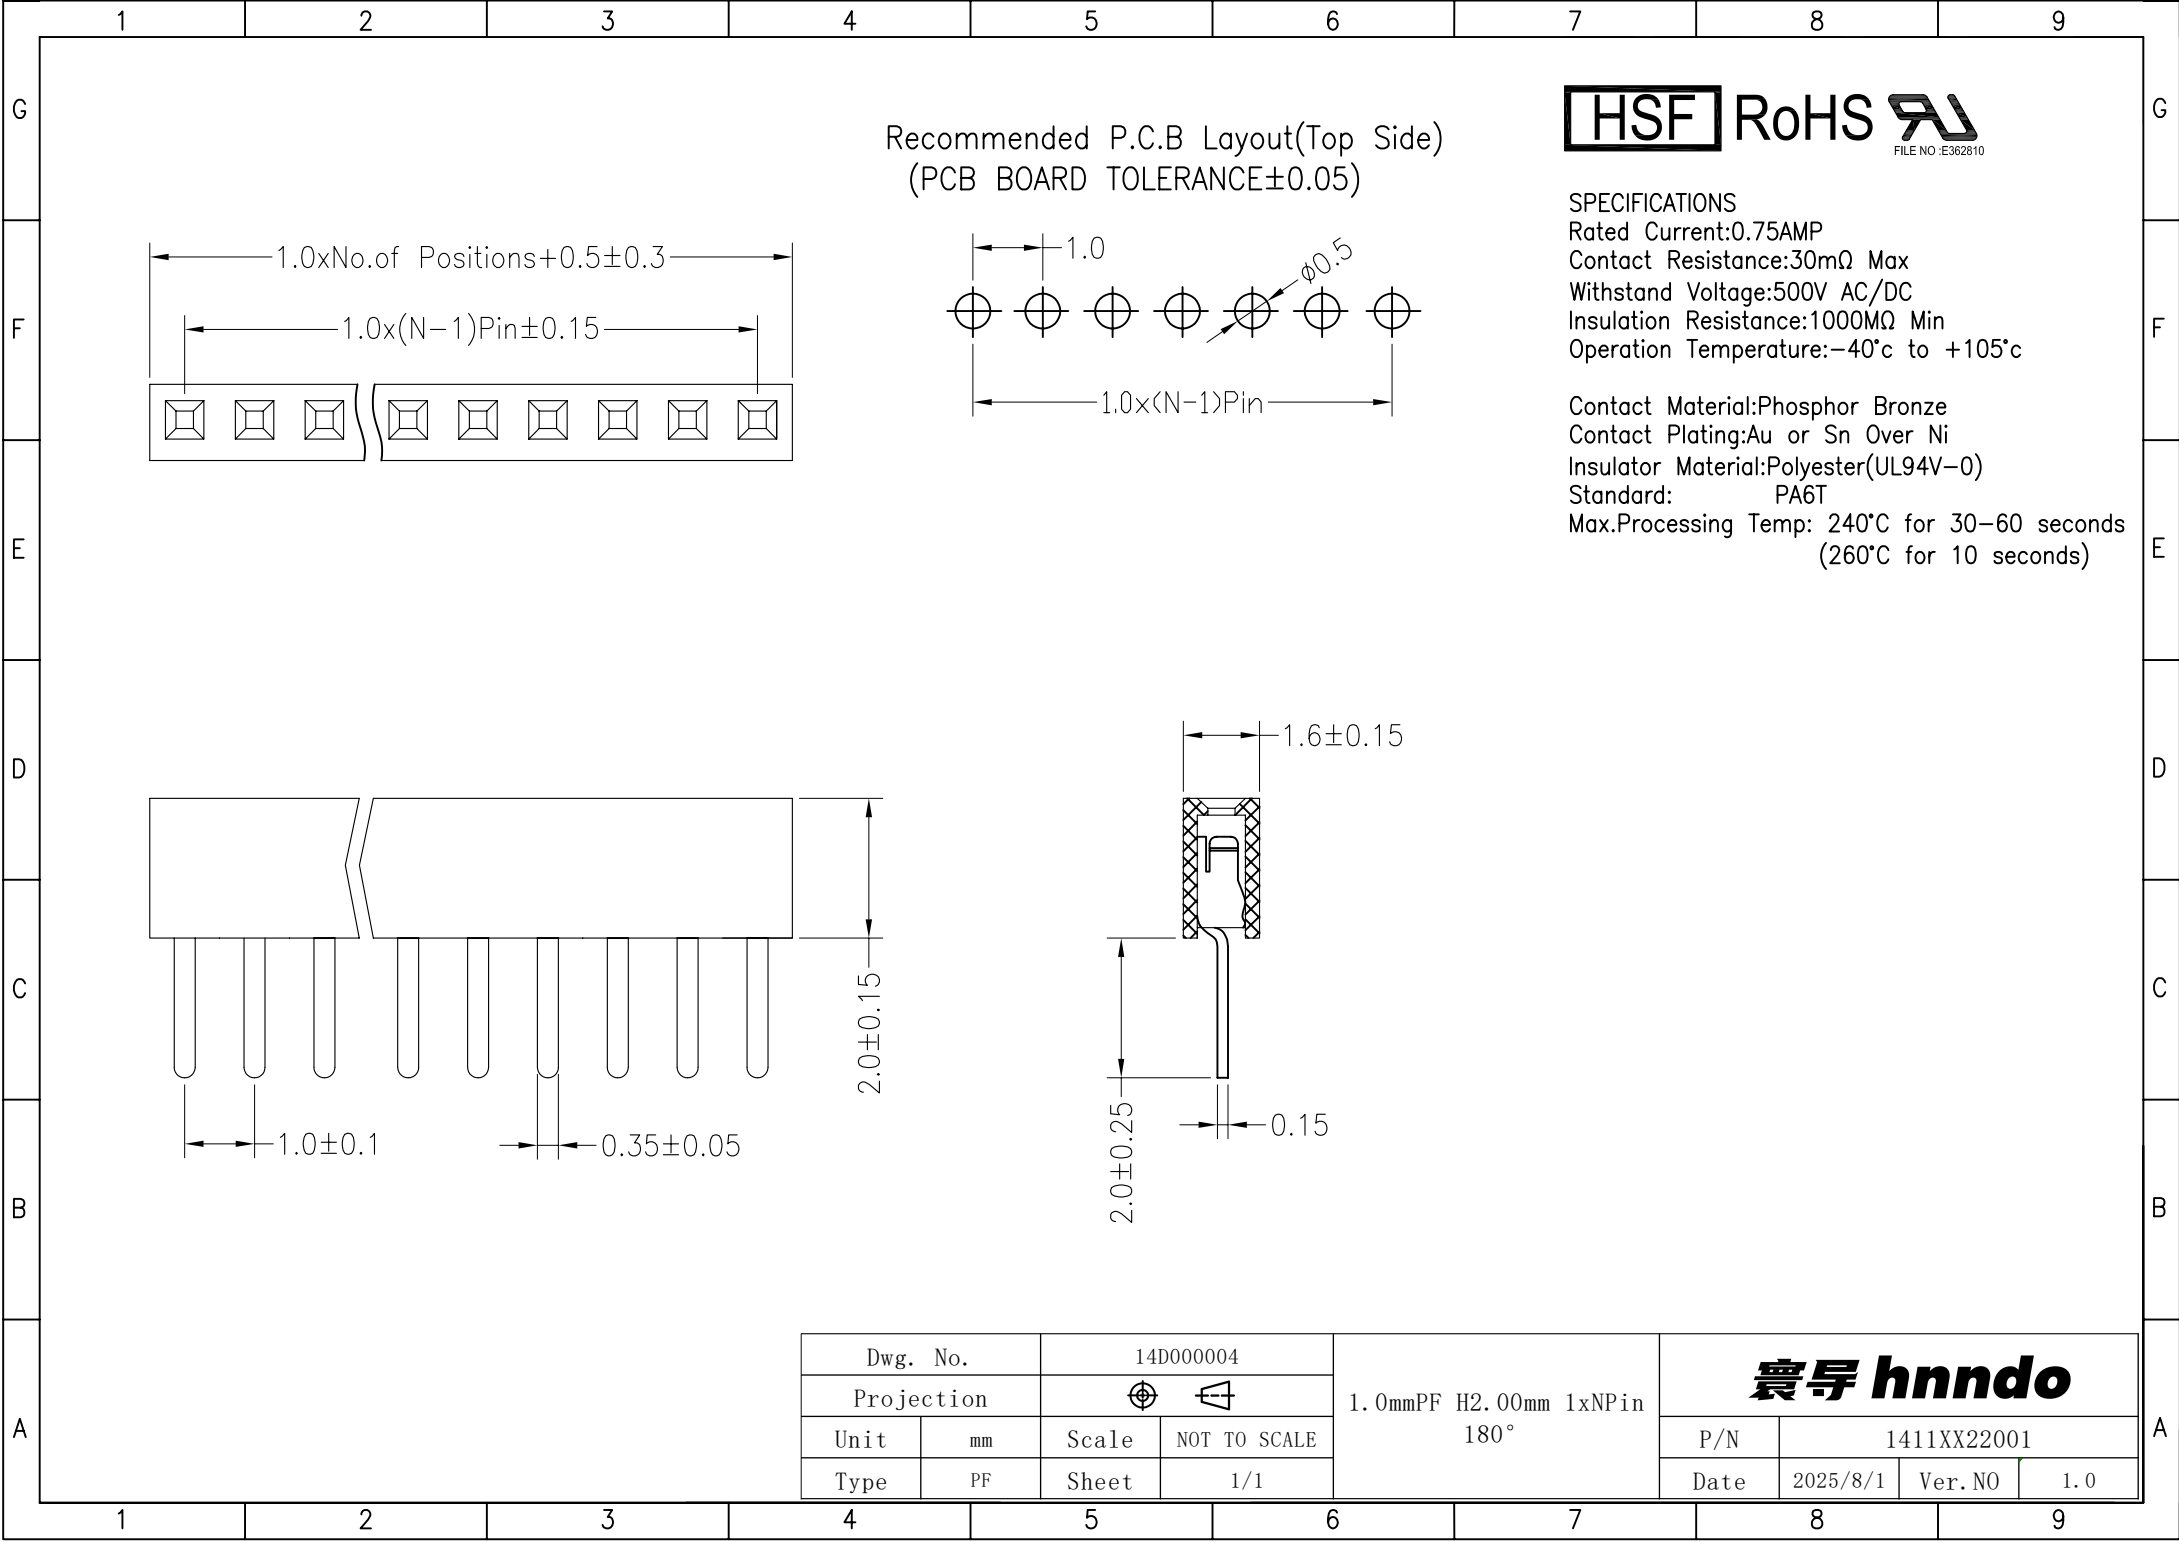

SPECIFICATIONS
Rated Current:0.75AMP
Contact Resistance:30m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 240°C for 30-60 seconds
(260°C for 10 seconds)

Dwg. No.		14D000004		1.0mmPF H2.00mm 1xNPin 180°	震導 hnndo				
Projection					P/N		1411XX22001		
Unit	mm	Scale	NOT TO SCALE		Date		2025/8/1	Ver. NO	1.0
Type	PF	Sheet	1/1						