


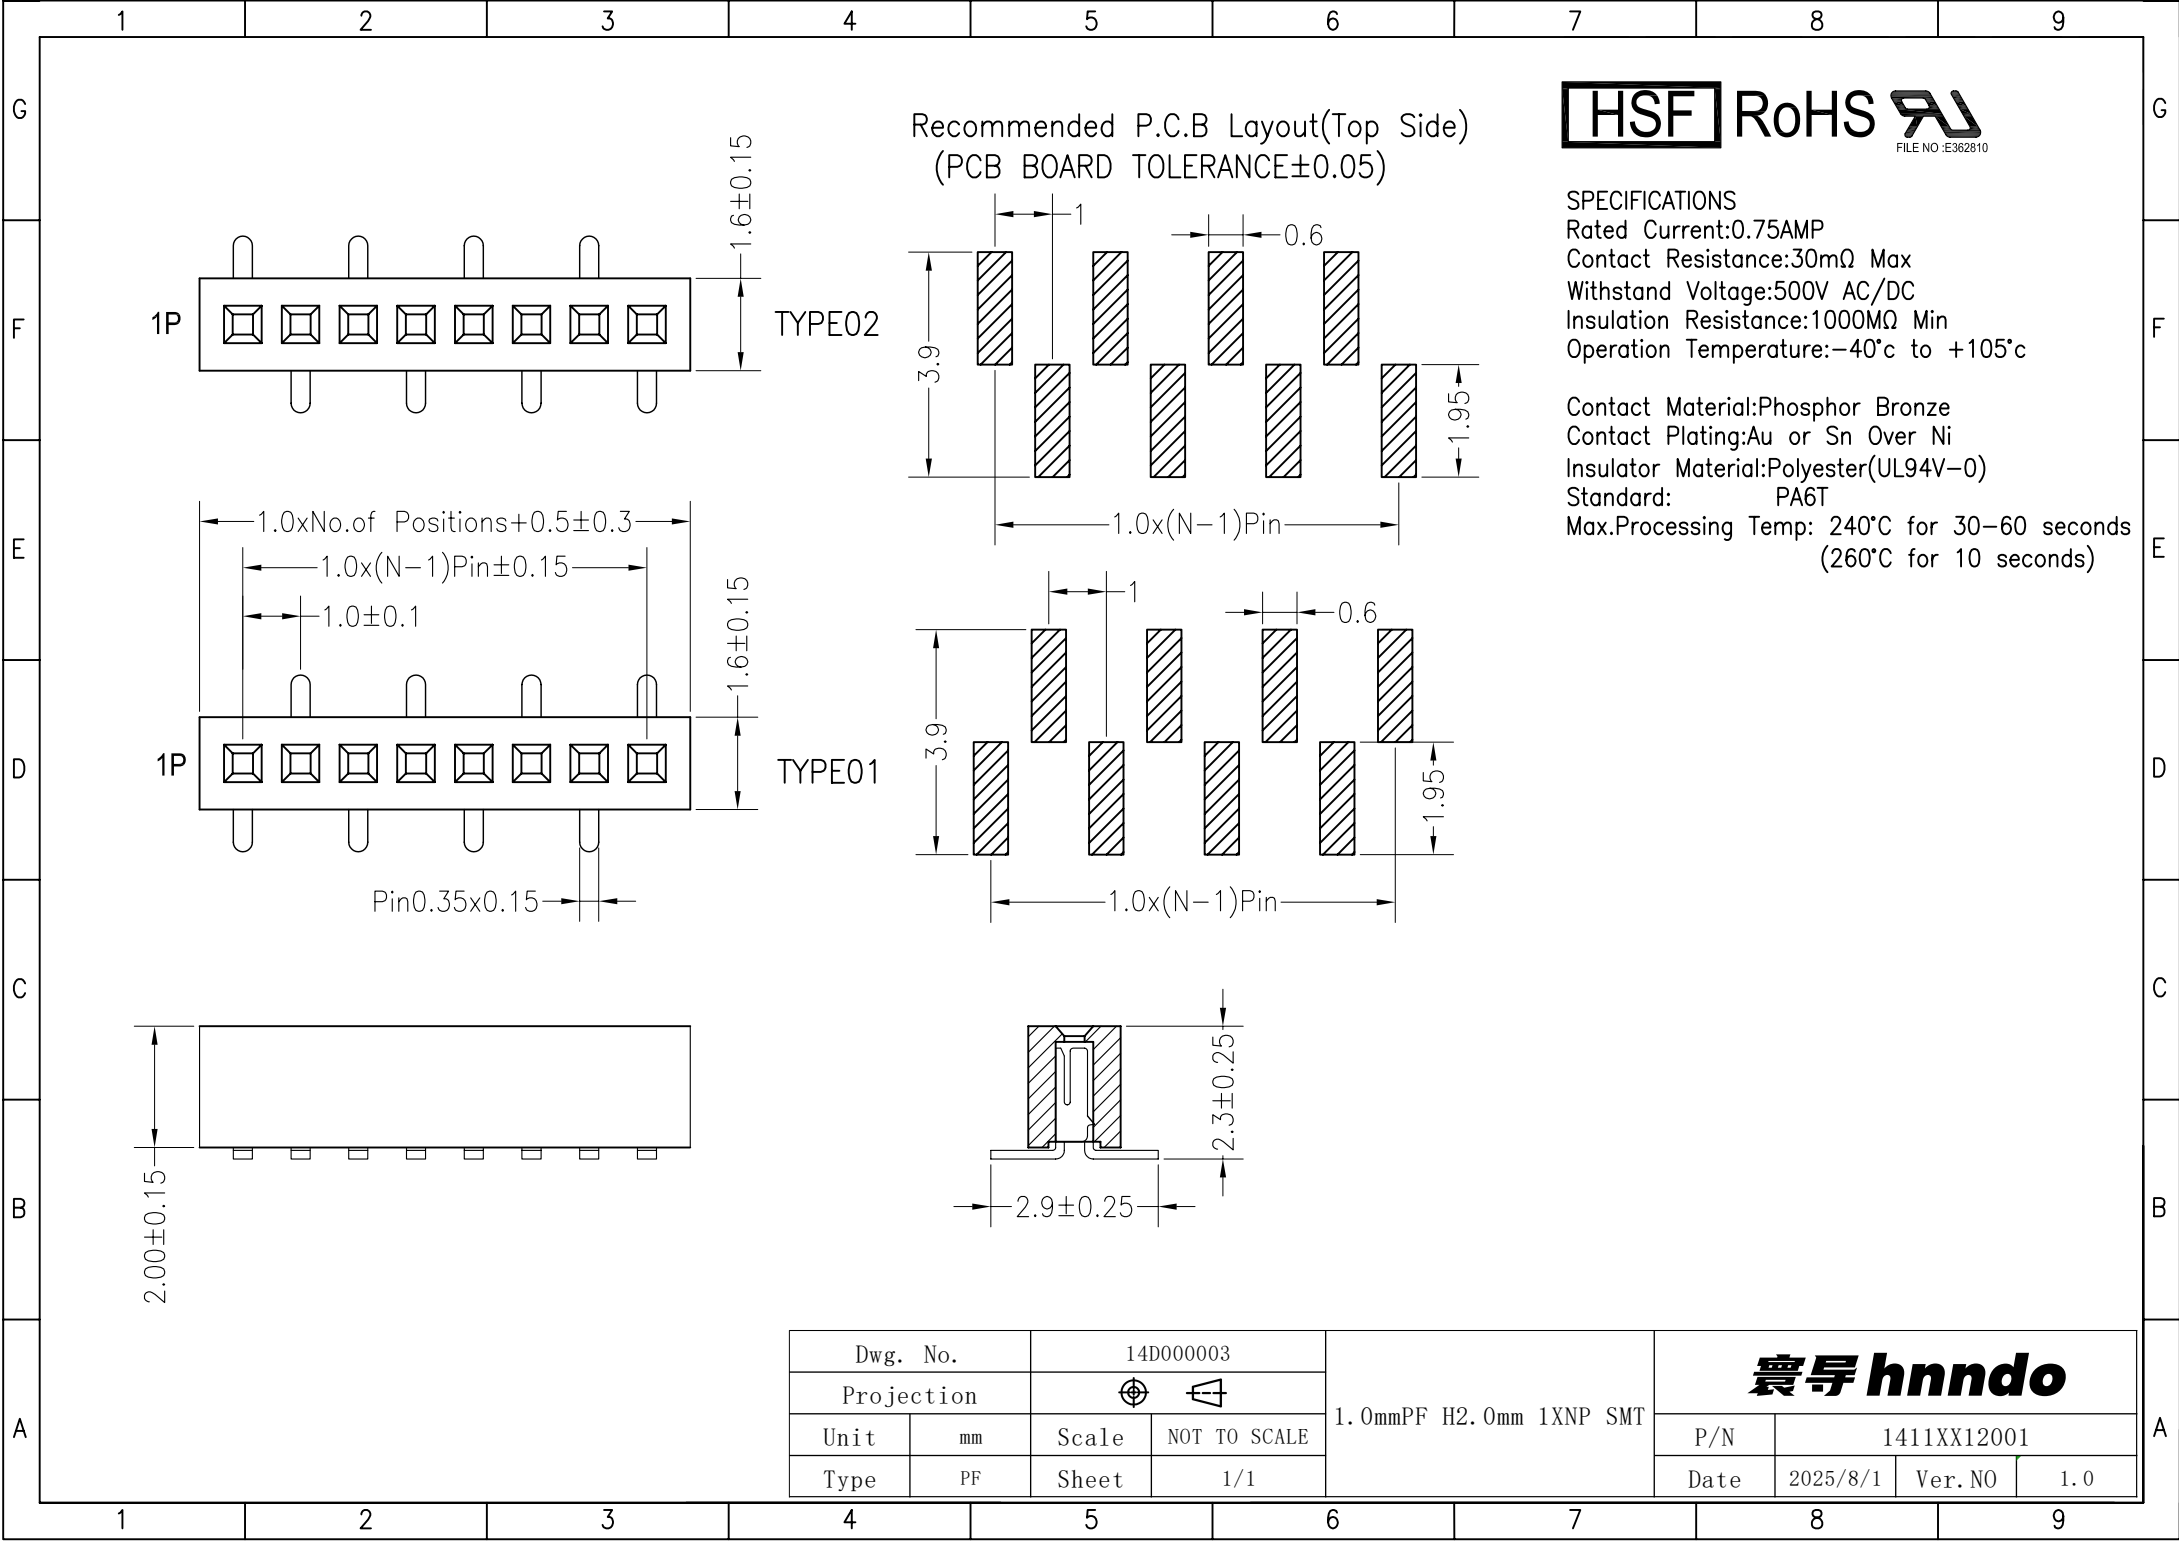

SPECIFICATIONS
Rated Current:0.75AMP
Contact Resistance:30mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 240℃ for 30-60 seconds
(260℃ for 10 seconds)

Dwg. No.		14D000003		1.0mmPF H2.0mm 1XNP SMT	寰宇 <i>hnndo</i>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1411XX12001		
Type	PF	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0