


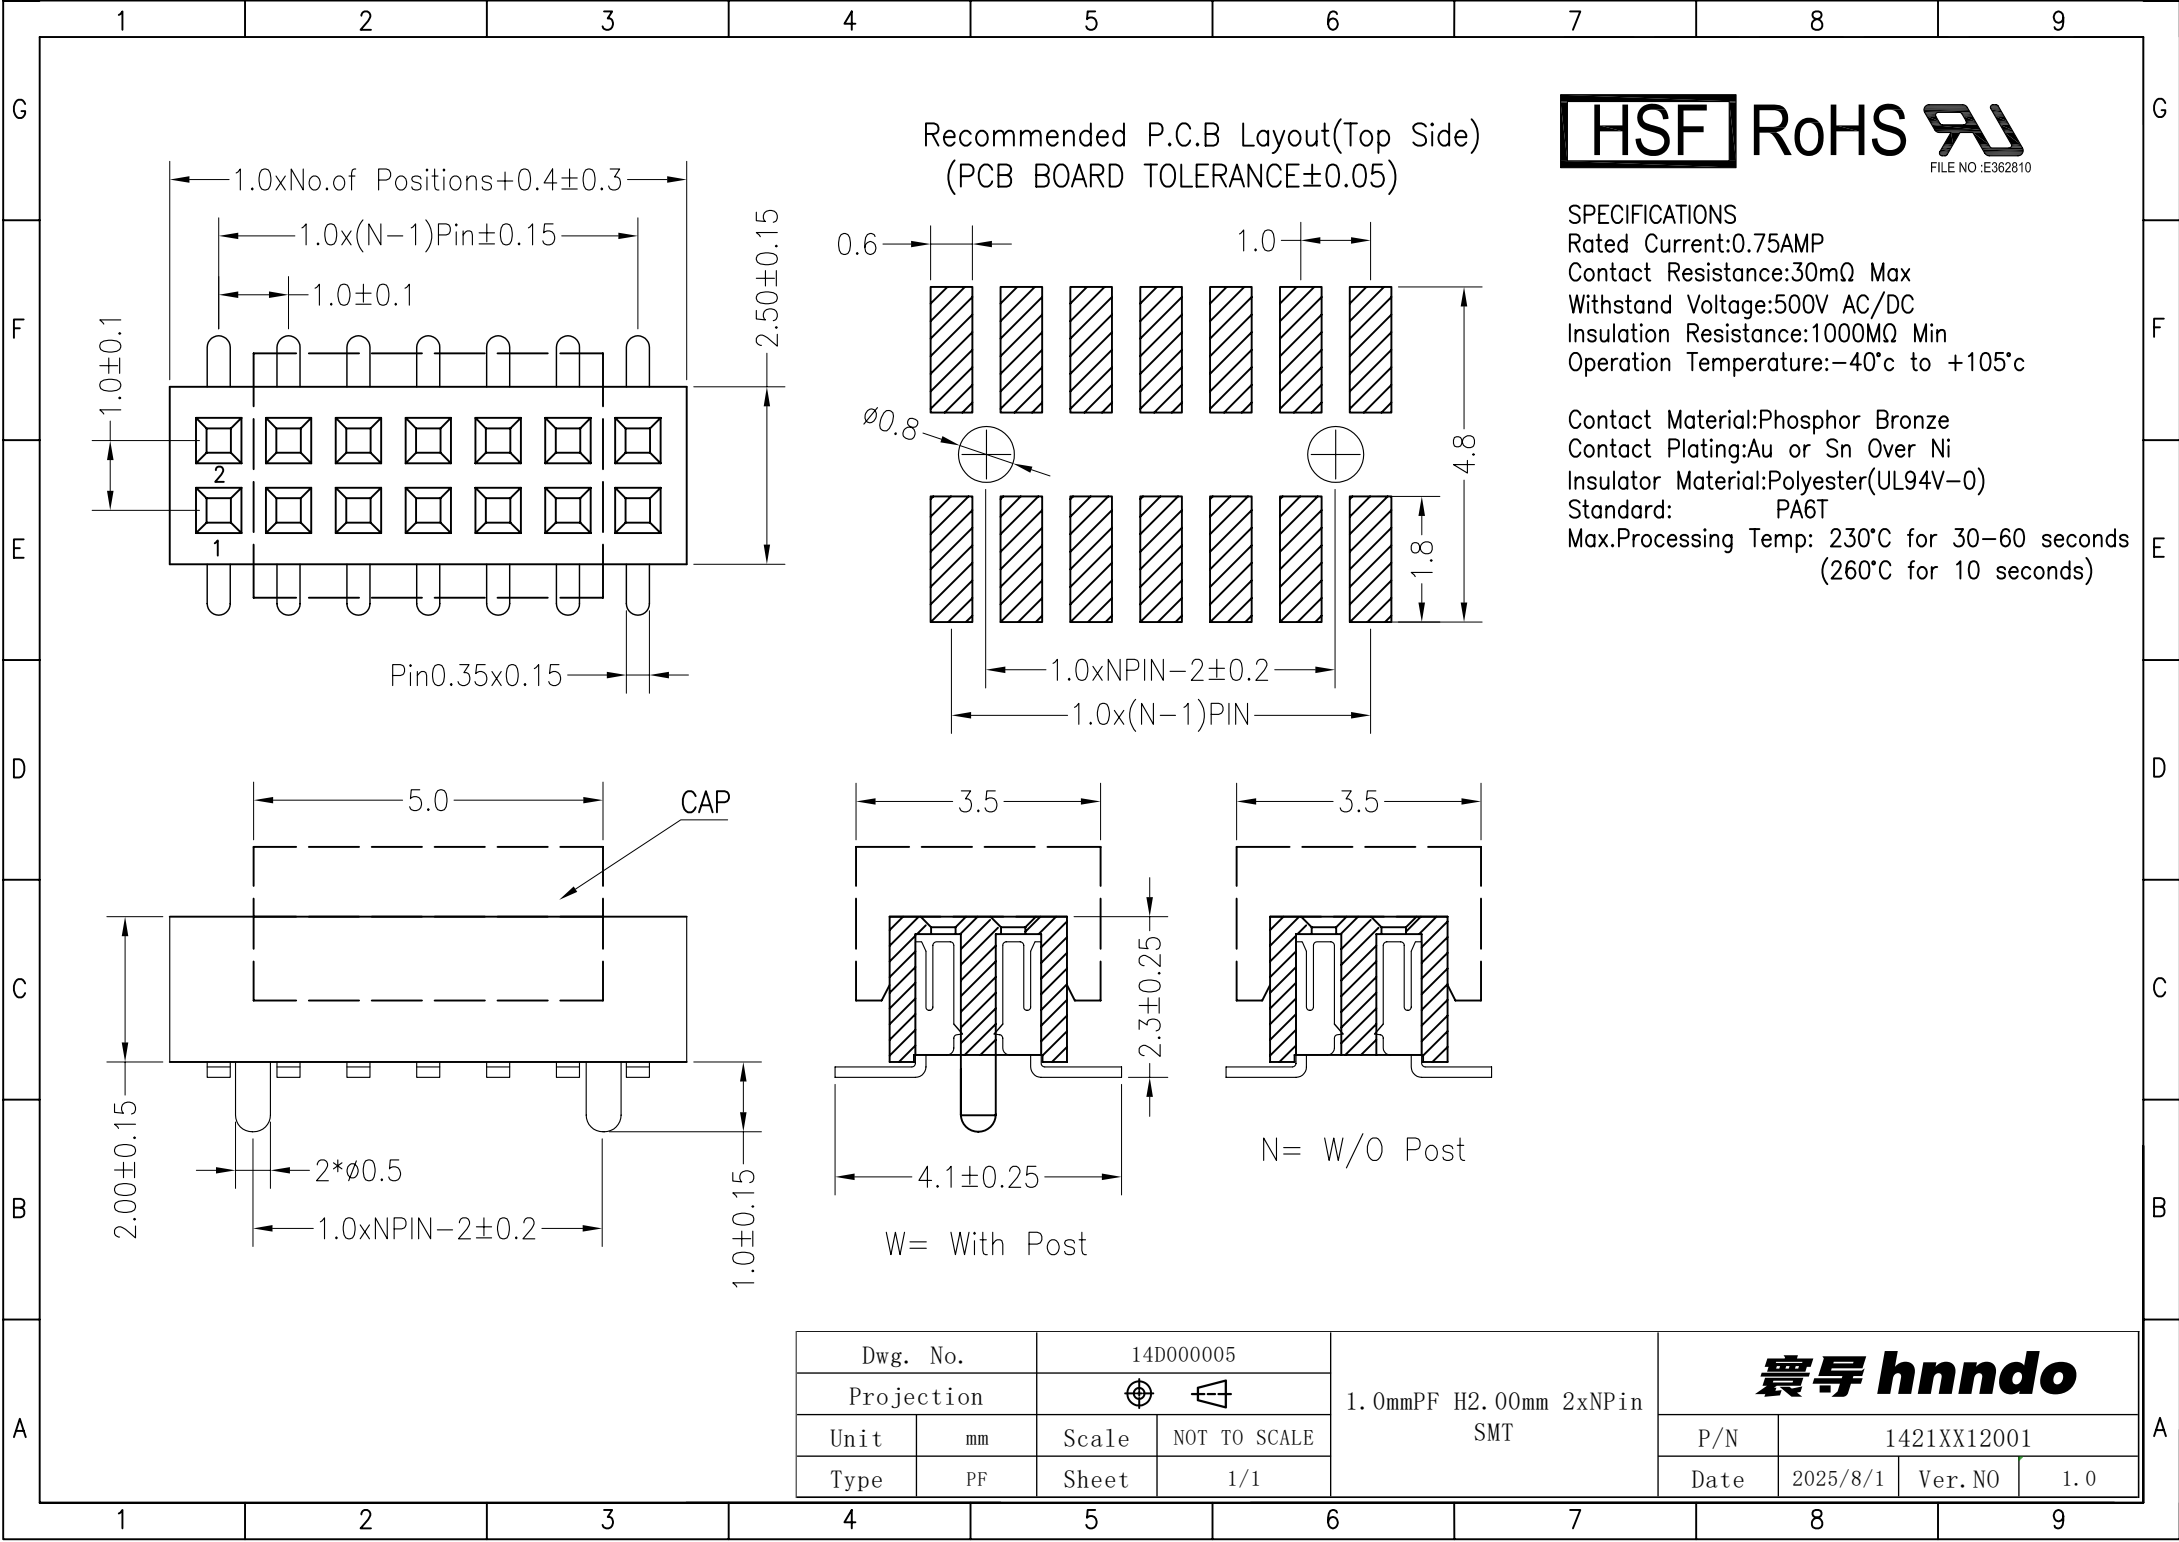

SPECIFICATIONS
Rated Current: 0.75AMP
Contact Resistance: 30mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
Contact Plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V-0)
Standard: PA6T
Max. Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dwg. No.		14D000005		1.0mmPF H2.00mm 2xNPIn SMT	寰宇 <i>hnndo</i>				
Projection					P/N		1421XX12001		
Unit	mm	Scale	NOT TO SCALE		Date		2025/8/1	Ver. NO	1.0
Type	PF	Sheet	1/1						