
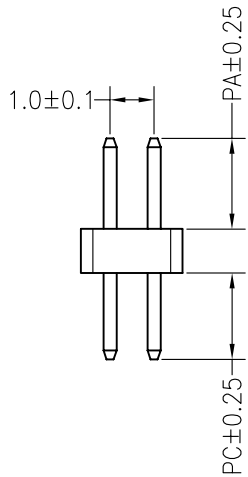
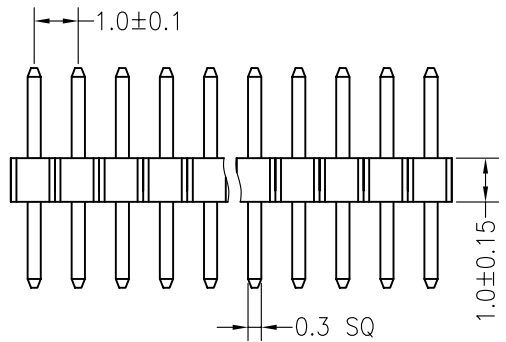


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

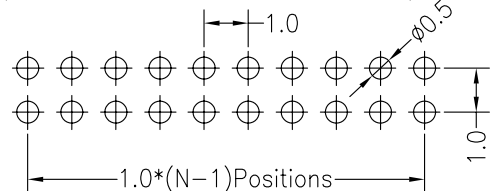

SPECIFICATIONS
Rated Current:0.75AMP
Contact Resistance:30mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list			
ITEM	PA	PC	L
Standard	2.00	2.00	5.00
Alternate			

Dwg. No.		13D000003	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	PH	Sheet	1/1

1.0mm PH Dual Row
H1.0mm 180°

寰宇 hnndo			
P/N	1321XX22001		
Date	2025/8/1	Ver.NO	1.0